

## Polypropylene (PP) Film and Foil Capacitors for Pulse Applications in PCM 7.5 mm to 15 mm. Capacitances from 100 pF to 0.22 µF. Rated Voltages from 63 VDC to 1000 VDC.

### Special Features

- Pulse duty construction
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EU

### Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- LC-Filtering
- Oscillating circuits
- Audio equipment

### Construction


#### Dielectric:

Polypropylene (PP) film

#### Capacitor electrodes:

Metal foil

#### Internal construction:

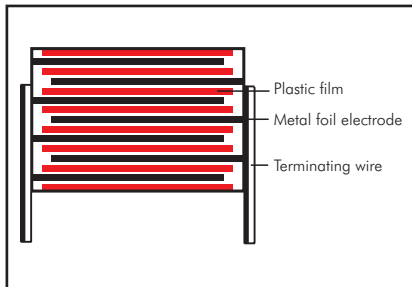

#### Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

#### Terminations:

Tinned wire.

#### Marking:

Colour: Red. Marking: Black.

### Electrical Data

#### Capacitance range:

100 pF to 0.22 µF (E12-values on request)

#### Rated voltages:

63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC, 850 VDC, 1000 VDC

#### Capacitance tolerances:

±20%, ±10%, ±5%

#### Operating temperature range:

-55° C to +100° C

#### Test specifications:

In accordance with IEC 60384-13

#### Climatic test category:

55/100/56 in accordance with IEC

#### Insulation resistance at +20° C:

≥ 3 x 10<sup>5</sup> MΩ

Measuring voltage:

U<sub>r</sub> = 63 V: U<sub>test</sub> = 50 V/1 min.

U<sub>r</sub> ≥ 100 V: U<sub>test</sub> = 100 V/1 min.

Test voltage: 2 U<sub>r</sub>, 2 sec.

#### Maximum pulse rise time:

1000 V/µsec for pulses equal to the rated voltage

#### Dielectric absorption:

0.05 %

#### Temperature coefficient:

-200 x 10<sup>-6</sup>/° C (general guide)

#### Dissipation factors at +20° C: tan δ

at f	C ≤ 0.1 µF	0.1 µF < C ≤ 0.22 µF
1 kHz	≤ 5 x 10 <sup>-4</sup>	≤ 5 x 10 <sup>-4</sup>
10 kHz	≤ 6 x 10 <sup>-4</sup>	≤ 6 x 10 <sup>-4</sup>
100 kHz	≤ 8 x 10 <sup>-4</sup>	-

#### Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from +85° C for DC voltages and from +75° C for AC voltages.

#### Reliability:

Operational life > 300 000 hours

Failure rate < 5 fit (0.5 x U<sub>r</sub> and 40° C)

### Mechanical Tests

#### Pull test on pins:

10 N in direction of pins according to IEC 60068-2-21

#### Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

#### Low air density:

1 kPa = 10 mbar in accordance with IEC 60068-2-13

#### Bump test:

4000 bumps at 390 m/sec<sup>2</sup> in accordance with IEC 60068-2-29

### Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

## Continuation

### General Data

Capacitance	63 VDC/40 VAC*					100 VDC/63 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF						3	8.5	10	<b>7.5</b>	FKP3D001002B00_____
150 "						3	8.5	10	<b>7.5</b>	FKP3D001502B00_____
220 "						3	8.5	10	<b>7.5</b>	FKP3D002202B00_____
330 "						3	8.5	10	<b>7.5</b>	FKP3D003302B00_____
470 "						3	8.5	10	<b>7.5</b>	FKP3D004702B00_____
680 "						3	8.5	10	<b>7.5</b>	FKP3D006802B00_____
1000 pF						3	8.5	10	<b>7.5</b>	FKP3D011002B00_____
1500 "						3	8.5	10	<b>7.5</b>	FKP3D011502B00_____
2200 "						3	8.5	10	<b>7.5</b>	FKP3D012202B00_____
3300 "						3	8.5	10	<b>7.5</b>	FKP3D013302B00_____
4700 "						3	8.5	10	<b>7.5</b>	FKP3D014702B00_____
6800 "						4	9	10	<b>7.5</b>	FKP3D016802C00_____
0.01 µF						4	9	10	<b>7.5</b>	FKP3D021002C00_____
0.015 "	4	9	10	<b>7.5</b>	FKP3C021502C00_____	4	9.5	13	10	FKP3D021503D00_____
0.022 "	4	9.5	13	10	FKP3C022203D00_____	5	11	13	10	FKP3D022203F00_____
0.033 "	4	9.5	13	10	FKP3C023303D00_____	6	12	13	10	FKP3D023303G00_____
0.047 "	5	11	13	10	FKP3C024703F00_____	5	11	18	15	FKP3D024704B00_____
0.068 "	6	12	13	10	FKP3C026803G00_____	6	12.5	18	15	FKP3D026804C00_____
0.1 µF	6	12.5	18	15	FKP3C031004C00_____	7	14	18	15	FKP3D031004D00_____
0.15 "	8	15	18	15	FKP3C031504F00_____	9	16	18	15	FKP3D031504J00_____
0.22 "	9	16	18	15	FKP3C032204J00_____					


Capacitance	250 VDC/160 VAC*					400 VDC/250 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	3	8.5	10	<b>7.5</b>	FKP3F001002B00_____	3	8.5	10	<b>7.5</b>	FKP3G001002B00_____
150 "	3	8.5	10	<b>7.5</b>	FKP3F001502B00_____	3	8.5	10	<b>7.5</b>	FKP3G001502B00_____
220 "	3	8.5	10	<b>7.5</b>	FKP3F002202B00_____	3	8.5	10	<b>7.5</b>	FKP3G002202B00_____
330 "	3	8.5	10	<b>7.5</b>	FKP3F003302B00_____	3	8.5	10	<b>7.5</b>	FKP3G003302B00_____
470 "	3	8.5	10	<b>7.5</b>	FKP3F004702B00_____	3	8.5	10	<b>7.5</b>	FKP3G004702B00_____
680 "	3	8.5	10	<b>7.5</b>	FKP3F006802B00_____	3	8.5	10	<b>7.5</b>	FKP3G006802B00_____
1000 pF	3	8.5	10	<b>7.5</b>	FKP3F011002B00_____	3	8.5	10	<b>7.5</b>	FKP3G011002B00_____
1500 "	3	8.5	10	<b>7.5</b>	FKP3F011502B00_____	4	9	10	<b>7.5</b>	FKP3G011502C00_____
2200 "	4	9	10	<b>7.5</b>	FKP3F012202C00_____	4	9	10	<b>7.5</b>	FKP3G012202C00_____
						4	9.5	13	10	FKP3G012203D00_____
3300 "	3	9	13	10	FKP3F013303A00_____	4	9.5	13	10	FKP3G013303D00_____
4700 "	4	9.5	13	10	FKP3F014703D00_____	5	11	13	10	FKP3G014703F00_____
6800 "	5	11	13	10	FKP3F016803F00_____	6	12	13	10	FKP3G016803G00_____
0.01 µF	5	11	13	10	FKP3F021003F00_____	5	11	18	15	FKP3G021004B00_____
0.015 "	6	12	13	10	FKP3F021503G00_____	6	12.5	18	15	FKP3G021504C00_____
						5	11	18	15	FKP3F021504B00_____
0.022 "	6	12.5	18	15	FKP3F022204C00_____	7	14	18	15	FKP3G022204D00_____
0.033 "	7	14	18	15	FKP3F023304D00_____	8	15	18	15	FKP3G023304F00_____
0.047 "	8	15	18	15	FKP3F024704F00_____	9	16	18	15	FKP3G024704J00_____
0.068 "	9	16	18	15	FKP3F026804J00_____					

\* AC voltage:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.

$d = 0.5 \phi$  if  $W = 3$   
 $d = 0.6 \phi$  if  $W \geq 4$   
 $d = 0.8 \phi$  if PCM = 15



Part number completion:

Tolerance: 20 % = M  
10 % = K  
5 % = J

Packing: bulk = S  
Pin length: 6-2 = SD

Taped version see page 149.

Rights reserved to amend design data without prior notification.

## Continuation

### General Data

Capacitance	630 VDC/300 VAC*					850 VDC/300 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	3	8.5	10	<b>7.5</b>	FKP3J001002B00	3	8.5	10	<b>7.5</b>	FKP3M001002B00
150 "	3	8.5	10	<b>7.5</b>	FKP3J001502B00	3	8.5	10	<b>7.5</b>	FKP3M001502B00
220 "	3	8.5	10	<b>7.5</b>	FKP3J002202B00	3	8.5	10	<b>7.5</b>	FKP3M002202B00
330 "	3	8.5	10	<b>7.5</b>	FKP3J003302B00	3	8.5	10	<b>7.5</b>	FKP3M003302B00
470 "	3	8.5	10	<b>7.5</b>	FKP3J004702B00	3	8.5	10	<b>7.5</b>	FKP3M004702B00
680 "	3	8.5	10	<b>7.5</b>	FKP3J006802B00	3	8.5	10	<b>7.5</b>	FKP3M006802B00
1000 pF	4	9	10	<b>7.5</b>	FKP3J011002C00	4	9	10	<b>7.5</b>	FKP3M011002C00
1500 "	4	9.5	13	10	FKP3J011503D00	4	9.5	13	10	FKP3M011503D00
2200 "	4	9.5	13	10	FKP3J012203D00	4	9.5	13	10	FKP3M012203D00
3300 "	5	11	13	10	FKP3J013303F00	5	11	13	10	FKP3M013303F00
4700 "	6	12	13	10	FKP3J014703G00	6	12	13	10	FKP3M014703G00
6800 "	5	11	18	15	FKP3J016804B00	5	11	18	15	FKP3M016804B00
0.01 µF	6	12.5	18	15	FKP3J021004C00	6	12.5	18	15	FKP3M021004C00
0.015 "	8	15	18	15	FKP3J021504F00	8	15	18	15	FKP3M021504F00
0.022 "	9	16	18	15	FKP3J022204J00	9	16	18	15	FKP3M022204J00
0.033 "	9	16	18	15	FKP3J023304J00					

Capacitance	1000 VDC/300 VAC*				
	W	H	L	PCM**	Part number
100 pF	3	8.5	10	<b>7.5</b>	FKP3O101002B00
150 "	3	8.5	10	<b>7.5</b>	FKP3O101502B00
220 "	3	8.5	10	<b>7.5</b>	FKP3O102202B00
330 "	3	8.5	10	<b>7.5</b>	FKP3O103302B00
470 "	3	8.5	10	<b>7.5</b>	FKP3O104702B00
680 "	3	8.5	10	<b>7.5</b>	FKP3O106802B00
1000 pF	4	9	10	<b>7.5</b>	FKP3O111002C00
1500 "	4	9.5	13	10	FKP3O111503D00
2200 "	4	9.5	13	10	FKP3O112203D00
3300 "	5	11	13	10	FKP3O113303F00
4700 "	6	12	13	10	FKP3O114703G00
6800 "	5	11	18	15	FKP3O116804B00
0.01 µF	6	12.5	18	15	FKP3O121004C00
0.015 "	8	15	18	15	FKP3O121504F00
0.022 "	9	16	18	15	FKP3O122204J00

\* AC voltage:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

■ New range

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.

#### Part number completion:


Tolerance: 20 % = M  
10 % = K  
5 % = J

Packing: bulk = S  
Pin length: 6-2 = SD

Taped version see page 149.

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

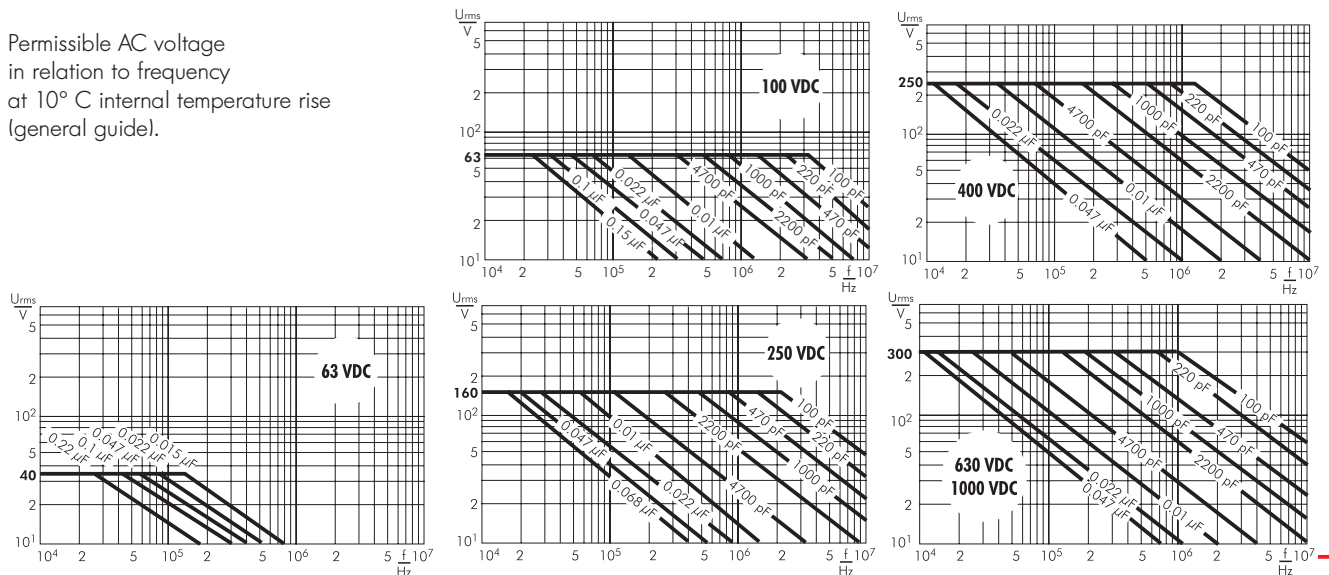

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating:  $T_{max.} \leq 125^{\circ}C$   
soldering:  $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating:  $T_{max.} \leq 100^{\circ}C$   
soldering:  $T_{max.} \leq 110^{\circ}C$

### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Dwell time:  $t < 5 \text{ sec}$

### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Dwell time:  $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.



## WIMA Quality and Environmental Philosophy

### ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

# Typical Dimensions for Taping Configuration



Diagram 1:  
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 150)	ROLL/AMMO			AMMO				
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 B 58 ±2 } depending on comp. dimensions	REEL φ 360 max. φ 30 ±1	B 52 ±2 B 58 ±2 or B 66 ±2	REEL φ 500 max. φ 25 ±1	B 54 ±2 B 60 ±2 B 68 ±2 } depending on PCM and component dimensions	
Unit	see details page 151.							

Dims in mm.

\* Diameter of pins see General Data.

\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P<sub>0</sub> = 12.7 or 15.0 is possible

Please clarify customer-specific deviations with the manufacturer.

## Types of Tape Packaging of Capacitors for Automatic Radial Insertion

### ■ ROLL Packaging



### ■ AMMO Packaging



### ■ REEL Packaging



## BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

<b>WIMA</b> Best Capacitors Made In Germany		Werk Unna
Supplier-ID: 123456789	<b>RoHS</b> 2011/65/EU	Date Code: 08.10.10
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002
		Gross Weight [g]: 1870
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K8SD	
Handling Unit:	MKS 2	QTY: 5.000 COO: DE
1000067326	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5	
	Standard 10% Loss - Standard	Dichte 6-2
	Vorlage Debitor Inland	Week 03/2011

BARCODE „Code 39“

# Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5	H18.5	ø 360	H16.5	H18.5	ø 500	H16.5	H18.5	340 x 340
					N	O	F	I	H	J	A	C	B	D	
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	5000		2200		2500		-		2800		-
	3	7.5	4.6	<b>0C</b>	5000		2000		2300		-		2300		-
	3.8	8.5	4.6	<b>0D</b>	5000		1500		1800		-		1800		-
	4.6	9	4.6	<b>0E</b>	5000		1200		1500		-		1500		-
	5.5	10	4.6	<b>0F</b>	5000		900		1200		-		1200		-
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	5000		2200		2500		-		2800		-
	3	7.5	7.2	<b>1B</b>	5000		2000		2300		-		2300		-
	3.5	8.5	7.2	<b>1C</b>	5000		1600		2000		-		2000		-
	4.5	6	7.2	<b>1D</b>	6000		1300		1500		-		1500		-
	4.5	9.5	7.2	<b>1E</b>	4000		1300		1500		-		1500		-
	5	10	7.2	<b>1F</b>	3500		1100		1400		-		1400		-
	5.5	7	7.2	<b>1G</b>	4000		1000		1200		-		1200		-
	5.5	11.5	7.2	<b>1H</b>	2500		1000		1200		-		1200		-
	6.5	8	7.2	<b>1I</b>	2500		800		1000		-		1000		-
	7.2	8.5	7.2	<b>1J</b>	2500		700		1000		-		1000		-
	7.2	13	7.2	<b>1K</b>	2000		700		950		-		1000		-
8.5	10	7.2	<b>1L</b>	2000		600		800		-		800		-	
8.5	14	7.2	<b>1M</b>	1500		600		800		-		800		-	
11	16	7.2	<b>1N</b>	1000		500		600		-		640		-	
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	5000		-		2500		4400		2500		-
	3	8.5	10	<b>2B</b>	5000		-		2200		4300		2300		4150
	4	9	10	<b>2C</b>	4000		-		1700		3200		1700		3100
	4.5	9.5	10.3	<b>2D</b>	3500		-		1500		2900		1400		2700
	5	10.5	10.3	<b>2E</b>	3000		-		1300		2500		1300		-
	5.7	12.5	10.3	<b>2F</b>	2000		-		1000		2200		1100		-
	7.2	12.5	10.3	<b>2G</b>	1500		-		900		1800		1000		-
<b>10 mm</b>	3	9	13	<b>3A</b>	3000		-		1100		2200		-		1900
	4	8.5	13.5	<b>FA</b>	3000		-		900		1600		-		1450
	4	9	13	<b>3C</b>	3000		-		900		1600		-		1450
	4	9.5	13	<b>3D</b>	3000		-		900		1600		-		1400
	5	10	13.5	<b>FB</b>	2000		-		700		1300		-		1200
	5	11	13	<b>3F</b>	3000		-		700		1300		-		1200
	6	12	13	<b>3G</b>	2400		-		550		1100		-		1000
	6	12.5	13	<b>3H</b>	2400		-		550		1100		-		1000
8	12	13	<b>3I</b>	2000		-		400		800		-		740	
<b>15 mm</b>	5	11	18	<b>4B</b>	2400		-		600		1200		-		1150
	5	13	19	<b>FC</b>	1000		-		600		1200		-		1200
	6	12.5	18	<b>4C</b>	2000		-		500		1000		-		1000
	6	14	19	<b>FD</b>	1000		-		500		1000		-		1000
	7	14	18	<b>4D</b>	1600		-		450		900		-		850
	7	15	19	<b>FE</b>	1000		-		450		900		-		850
	8	15	18	<b>4F</b>	1200		-		400		800		-		740
	8	17	19	<b>FF</b>	500		-		400		800		-		740
	9	14	18	<b>4H</b>	1200		-		350		700		-		650
	9	16	18	<b>4J</b>	900		-		350		700		-		650
10	18	19	<b>FG</b>	500		-		300		650		-		590	
11	14	18	<b>4M</b>	1000		-		300		600		-		540	
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>	1200		-		-		800		-		770
	6	15	26.5	<b>5B</b>	1000		-		-		700		-		640
	7	16.5	26.5	<b>5D</b>	760		-		-		600		-		550
	8	20	28	<b>FH</b>	500		-		-		500		-		480
	8.5	18.5	26.5	<b>5F</b>	500		-		-		480		-		450
	10	22	28	<b>FI</b>	570*		-		-		420		-		380
	10.5	19	26.5	<b>5G</b>	594*		-		-		400		-		360
	10.5	20.5	26.5	<b>5H</b>	594*		-		-		400		-		360
	11	21	26.5	<b>5I</b>	561*		-		-		380		-		350
	12	24	28	<b>FJ</b>	480*		-		-		350		-		310

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



## Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit											
						ROLL		REEL				AMMO					
	W	H	L	Codes		S	N	O	ø 360		ø 500		340 x 340		490 x 370		
								H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
								F	I	H	J	A	C	B	D		
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	567*	-	-	-	-	460/340*	-	-	420				
	11	21	31.5	<b>6B</b>	459*	-	-	-	-	380/280*	-	-	350				
	13	24	31.5	<b>6D</b>	378*	-	-	-	-	300	-	-	290				
	13	25	33	<b>FK</b>	405*	-	-	-	-	-	-	-	-				
	15	26	31.5	<b>6F</b>	324*	-	-	-	-	270	-	-	250				
	15	26	33	<b>FL</b>	324*	-	-	-	-	-	-	-	-				
	17	29	31.5	<b>6G</b>	198*	-	-	-	-	-	-	-	-				
	17	34.5	31.5	<b>6I</b>	198*	-	-	-	-	-	-	-	-				
	20	32	33	<b>FM</b>	162*	-	-	-	-	-	-	-	-				
20	39.5	31.5	<b>6J</b>	162*	-	-	-	-	-	-	-	-					
<b>37.5 mm</b>	9	19	41.5	<b>7A</b>	441*	-	-	-	-	-	-	-	-				
	11	22	41.5	<b>7B</b>	357*	-	-	-	-	-	-	-	-				
	13	24	41.5	<b>7C</b>	294*	-	-	-	-	-	-	-	-				
	15	26	41.5	<b>7D</b>	252*	-	-	-	-	-	-	-	-				
	17	29	41.5	<b>7E</b>	154*	-	-	-	-	-	-	-	-				
	19	32	41.5	<b>7F</b>	140*	-	-	-	-	-	-	-	-				
	20	39.5	41.5	<b>7G</b>	126*	-	-	-	-	-	-	-	-				
	24	45.5	41.5	<b>7H</b>	112*	-	-	-	-	-	-	-	-				
	31	46	41.5	<b>7I</b>	84*	-	-	-	-	-	-	-	-				
	35	50	41.5	<b>7J</b>	35*	-	-	-	-	-	-	-	-				
	40	55	41.5	<b>7K</b>	28*	-	-	-	-	-	-	-	-				
<b>48.5 mm</b>	19	31	56	<b>8D</b>	120*	-	-	-	-	-	-	-	-				
	23	34	56	<b>8E</b>	80*	-	-	-	-	-	-	-	-				
	27	37.5	56	<b>8H</b>	84*	-	-	-	-	-	-	-	-				
	33	48	56	<b>8J</b>	25*	-	-	-	-	-	-	-	-				
	37	54	56	<b>8L</b>	25*	-	-	-	-	-	-	-	-				
<b>52.5 mm</b>	25	45	57	<b>9D</b>	70*	-	-	-	-	-	-	-	-				
	30	45	57	<b>9E</b>	60*	-	-	-	-	-	-	-	-				
	35	50	57	<b>9F</b>	25*	-	-	-	-	-	-	-	-				
	45	55	57	<b>9H</b>	20*	-	-	-	-	-	-	-	-				
	45	65	57	<b>9J</b>	20*	-	-	-	-	-	-	-	-				

\* for 2-inch transport pitches.

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

Updated data on [www.wima.com](http://www.wima.com)





A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>M</b>	<b>K</b>	<b>S</b>	<b>2</b>	<b>C</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>M</b>	<b>S</b>	<b>S</b>	<b>D</b>
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6 -2		

<p><b>Type description:</b></p> <p>SMD-PET = SMDT  SMD-PEN = SMDN  SMD-PPS = SMDI  FKP 02 = FKPO  MKS 02 = MKS0  FKS 2 = FKS2  FKP 2 = FKP2  FKS 3 = FKS3  FKP 3 = FKP 3  MKS 2 = MKS2  MKP 2 = MKP2  MKS 4 = MKS4  MKP 4C = MKPC  MKP 4 = MKP4  MKP 10 = MKP1  FKP 1 = FKP1  MKP-X2 = MKX2  MKP-X1 R = MKX1  MKP-Y2 = MKY2  MP 3-X2 = MPX2  MP 3-X1 = MPX1  MP 3-Y2 = MPY2  MP 3R-Y2 = MPRY  MKP 4F = MKPF  Snubber MKP = SNMP  Snubber FKP = SNFP  GTO MKP = GTOM  DC-LINK MKP 3 = DCP3  DC-LINK MKP 4 = DCP4  DC-LINK MKP 4S = DCP5  DC-LINK MKP 5 = DCP5  DC-LINK MKP 6 = DCP6  DC-LINK HC = DCHC  DC-LINK HY = DCHY</p>	<p><b>Rated voltage:</b></p> <p>50 VDC = B0  63 VDC = C0  100 VDC = D0  250 VDC = F0  400 VDC = G0  450 VDC = H0  520 VDC = H2  600 VDC = I0  630 VDC = J0  700 VDC = K0  800 VDC = L0  850 VDC = M0  900 VDC = N0  1000 VDC = O1  1100 VDC = P0  1200 VDC = Q0  1250 VDC = R0  1500 VDC = S0  1600 VDC = T0  2000 VDC = U0  2500 VDC = V0  3000 VDC = W0  4000 VDC = X0  6000 VDC = Y0  250 VAC = 0W  275 VAC = 1W  300 VAC = 2W  305 VAC = AW  350 VAC = BW  440 VAC = 4W  500 VAC = 5W  ...</p>	<p><b>Capacitance:</b></p> <p>22 pF = 0022  47 pF = 0047  100 pF = 0100  150 pF = 0150  220 pF = 0220  330 pF = 0330  470 pF = 0470  680 pF = 0680  1000 pF = 1100  1500 pF = 1150  2200 pF = 1220  3300 pF = 1330  4700 pF = 1470  6800 pF = 1680  0.01 µF = 2100  0.022 µF = 2220  0.047 µF = 2470  0.1 µF = 3100  0.22 µF = 3220  0.47 µF = 3470  1 µF = 4100  2.2 µF = 4220  4.7 µF = 4470  10 µF = 5100  22 µF = 5220  47 µF = 5470  100 µF = 6100  220 µF = 6220  1000 µF = 7100  1500 µF = 7150  ...</p>	<p><b>Size:</b></p> <p>4.8x3.3x3 Size 1812 = KA  4.8x3.3x4 Size 1812 = KB  5.7x5.1x3.5 Size 2220 = QA  5.7x5.1x4.5 Size 2220 = QB  7.2x6.1x3 Size 2824 = TA  7.2x6.1x5 Size 2824 = TB  10.2x7.6x5 Size 4030 = VA  12.7x10.2x6 Size 5040 = XA  15.3x13.7x7 Size 6054 = YA  2.5x7x4.6 PCM 2.5 = 0B  3x7.5x4.6 PCM 2.5 = 0C  2.5x6.5x7.2 PCM 5 = 1A  3x7.5x7.2 PCM 5 = 1B  2.5x7x10 PCM 7.5 = 2A  3x8.5x10 PCM 7.5 = 2B  3x9x13 PCM 10 = 3A  4x9x13 PCM 10 = 3C  5x11x18 PCM 15 = 4B  6x12.5x18 PCM 15 = 4C  5x14x26.5 PCM 22.5 = 5A  6x15x26.5 PCM 22.5 = 5B  9x19x31.5 PCM 27.5 = 6A  11x21x31.5 PCM 27.5 = 6B  9x19x41.5 PCM 37.5 = 7A  11x22x41.5 PCM 37.5 = 7B  19x31x56 PCM 48.5 = 8D  25x45x57 PCM 52.5 = 9D  ...</p> <p><b>Version code:</b></p> <p>Standard = 00  Version A1 = 1A  Version A1.1.1 = 1B  Version A2 = 2A  ...</p>	<p><b>Tolerance:</b></p> <p>±20% = M  ±10% = K  ±5% = J  ±2.5% = H  ±1% = E  ...</p> <p><b>Packing:</b></p> <p>AMMO H16.5 340x340 = A  AMMO H16.5 490x370 = B  AMMO H18.5 340x340 = C  AMMO H18.5 490x370 = D  REEL H16.5 360 = F  REEL H16.5 500 = H  REEL H18.5 360 = I  REEL H18.5 500 = J  ROLL H16.5 = N  ROLL H18.5 = O  BLISTER W12 180 = P  BLISTER W12 330 = Q  BLISTER W16 330 = R  BLISTER W24 330 = T  Bulk/TPS Standard = S  ...</p> <p><b>Pin length (untaped)</b></p> <p>3.5 ±0.5 = C9  6 -2 = SD  16 ±1 = P1  ...</p> <p><b>Pin length (taped)</b></p> <p>none = 00</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## WIMA:

[FKP3F002202B00KSSD](#) [FKP3F004702B00JSSD](#) [FKP3G014703F00JSSD](#) [FKP3G014703F00KSSD](#)  
[FKP3J001002B00KSSD](#) [FKP3J001002B00MSSD](#) [FKP3J001502B00JSSD](#) [FKP3J002202B00KSSD](#)  
[FKP3J003302B00JSSD](#) [FKP3J004702B00KSSD](#) [FKP3J011503D00JSSD](#) [FKP3J012203D00KSSD](#)  
[FKP3J013303F00JSSD](#) [FKP3O111002C00KSSD](#) [FKP3J002202B00JSSD](#) [FKP3J014703G00KSSD](#)  
[FKP3J014703G00JSSD](#) [FKP3J004702B00JSSD](#) [FKP3J001002B00JSSD](#) [FKP3C031004C00JSSD](#)  
[FKM3G011003A00KSSD](#) [FKP3J004702B00KA00](#) [FKP3-470/630/10P7](#) [FKP3G023304F00JI00](#)  
[FKP3J003302B00KSSD](#) [FKP3-2200/630/10P10](#) [FKP3-470/250/5P7](#) [FKP3G021504C00JI00](#) [FKP3G004702B00JA00](#)  
[FKP3J001002B00KF00](#) [FKP3-1000/630/10P7](#) [FKP3-220/630/5P7](#) [FKP3-100/1KV/20P7T](#) [FKP3O102202B00KSSD](#)  
[FKP3-150/630/5P7](#) [FKP3-330/630/5P7](#) [FKP3-220/250/10P7](#) [FKP3-.033/400/5P15T](#) [FKP3-1000/1KV/10P7](#)  
[FKP3J011002C00KSSD](#) [FKP3-4700/400/5P10](#) [FKP3-4700/400/5P10T](#) [FKP3J002202B00KSI0](#) [FKP3-1500/630/5P10](#)  
[FKP3-.015/400/5P15T](#) [FKP3-220/630/10P7LL9](#) [FKP3-470/630/5P7](#) [FKM3-1000/400/10P10](#) [FKP3-100/630/20P7](#)  
[FKP3F011002B00JC00](#) [FKP3-220/630/10P7](#) [FKP3G014703F00JI00](#) [FKP3-100/630/10P7](#) [FKP3-3300/630/5P10](#)  
[FKP3-.01/400/5P15T](#) [FKP3J021004C00KSSD](#) [FKP3G021004B00JI00](#) [FKP3G012203D00KSSD](#)  
[FKP3O111503D00JF00](#) [FKP3G011002B00JF00](#) [FKP3G021004B00JSSD](#) [FKP3J013303F00KSSD](#)  
[FKP3O111503D00JSSD](#) [FKP3F026804J00JSSD](#) [FKP3J011002C00JSSD](#) [FKP3G011002B00KSSD](#)  
[FKP3G011002B00JSSD](#) [FKP3C032204J00KSSD](#) [FKP3F013303A00JSSD](#) [FKP3G011002B00MSSD](#)  
[FKP3F011502B00KSSD](#) [FKP3G016803G00JSSD](#) [FKP3O101002B00JSSD](#) [FKP3D023303G00KSSD](#)  
[FKP3C032204J00JSSD](#) [FKP3J011503D00MSSD](#) [FKP3C024703F00JSSD](#) [FKP3O104702B00JSSD](#)  
[FKP3D031004D00KSSD](#) [FKP3O106802B00JSSD](#) [FKP3J016804B00JD00](#) [FKP3D023303G00JSSD](#)  
[FKP3G012202C00KSSD](#) [FKP3O106802B00KSSD](#) [FKP3O121004C00MSSD](#) [FKP3D001002B00MD00](#)  
[FKP3J016804B00KB00](#) [FKP3D021002C00MI00](#) [FKP3O101002B00MSSD](#) [FKP3J016804B00JB00](#)  
[FKP3O111002C00JA00](#) [FKP3G012203D00JSSD](#) [FKP3D021002C00KSSD](#) [FKP3D031004D00JSSD](#)  
[FKP3G013303D00MSC9](#) [FKP3J011002C00KSC9](#) [FKP3D014702B00JSSD](#) [FKP3D021002C00JSSD](#)  
[FKP3F013303A00MSSD](#) [FKP3F021003F00JSSD](#)