


- **Miniature**
- **Ultra Low Impedance**
- **Low Resistivity Electrolyte**
- **+105°C Maximum Temperature**

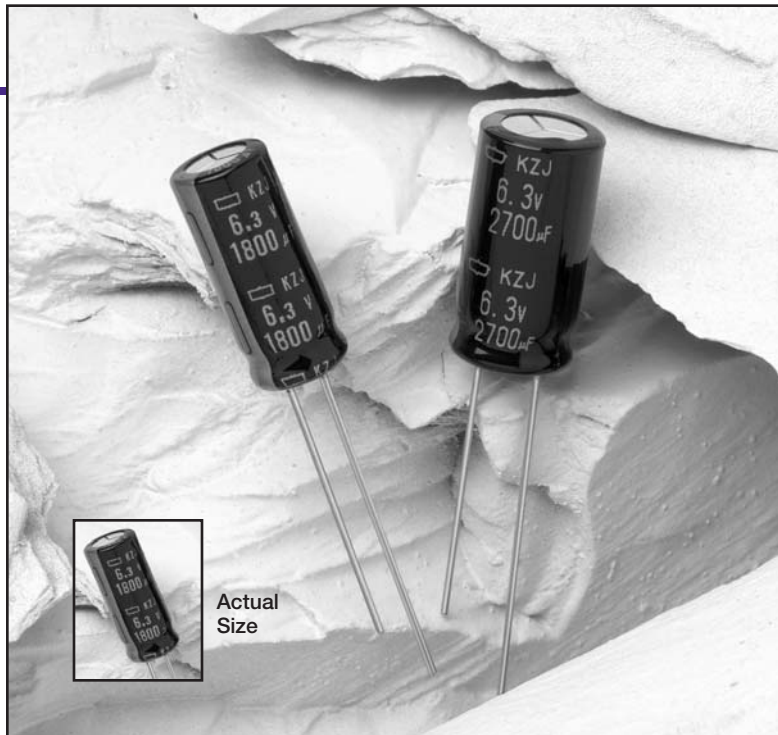

The KZJ series is a new ultra low impedance series from United Chemi-Con. These capacitors are different from the standard low impedance capacitors, as they use a new low resistivity electrolyte. Compared to our KZG series that also uses this advanced electrolyte technology, the KZJ series has lower ESR/impedance and higher ripple current capability, making them ideal for use in computer motherboard circuits where very low impedance at high frequencies is required. This series offers large capacitance per case size and a rated lifetime of 2,000 hours at +105°C with the rated ripple current applied. As an option the KZJ series is available with environmentally friendly PET (polyester) sleeves and Pb-free materials.

The KZJ series capacitors are non-solvent proof. Refer to the Mini-Glossary for cleaning guidelines and recommended cleaning agents that are compatible with United Chemi-Con products.

Summary of Specifications

- **Radial lead terminals.**
- **Capacitance range: 470 to 3,300µF.**
- **Voltage range: 6.3 to 16VDC.**
- **Category temperature range: -40°C to +105°C.**
- **Leakage current: 0.01CV or 3µA, whichever is greater, after 2 minutes at +20°C.**
- **Standard capacitance tolerance: ±20%**
- **Nominal case size (D × L): 8 × 11.5mm to 12.5 × 25mm.**
- **Rated lifetime: 2,000 hours at +105°C with the rated ripple current applied.**

KZJ Specifications


Item	Characteristics																				
Category Temperature Range	- 40 to +105°C																				
Rated Voltage Range	6.3 to 16VDC																				
Capacitance Range	470 to 3,300 μ F																				
Capacitance Tolerance	\pm 20% (M) at +20°C, 120Hz																				
Leakage Current	I = 0.01CV or 3 μ A, whichever is greater, after 2 minutes at +20°C. Where I = Max. leakage current (μ A), C = Nominal capacitance (μ F) and V = Rated voltage (V)																				
Dissipation Factor (Tan δ)	At +20°C, 120Hz <table border="1" style="margin-left: 20px;"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> </tr> <tr> <td>Tan δ (DF)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> </tr> </table> When nominal capacitance exceeds 1,000 μ F, add 0.02 to the values above for each 1,000 μ F increase.	Rated Voltage (V)	6.3	10	16	Tan δ (DF)	0.22	0.19	0.16												
Rated Voltage (V)	6.3	10	16																		
Tan δ (DF)	0.22	0.19	0.16																		
Impedance at 100kHz	At 100kHz, maximum impedance at +20°C is specified in the Ratings Tables.																				
Low Temperature Characteristics	At 120Hz, impedance (Z) ratio between the -25°C or -40°C value and +20°C value shall not exceed the values given below. <table border="1" style="margin-left: 20px;"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> </tr> <tr> <td>Z (-25°C) / Z (+20°C)</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z (-40°C) / Z (+20°C)</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated Voltage (V)	6.3	10	16	Z (-25°C) / Z (+20°C)	2	2	2	Z (-40°C) / Z (+20°C)	3	3	3								
Rated Voltage (V)	6.3	10	16																		
Z (-25°C) / Z (+20°C)	2	2	2																		
Z (-40°C) / Z (+20°C)	3	3	3																		
Rated Ripple Current Multipliers <i>Refer to Section 4 of the Mini-Glossary for explanation of Rated Ripple Current Multipliers.</i>	Frequency (Hz) <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Capacitance (μF)</th> <th>120Hz</th> <th>1kHz</th> <th>10kHz</th> <th>100kHz</th> </tr> </thead> <tbody> <tr> <td>470μF</td> <td>0.50</td> <td>0.85</td> <td>0.94</td> <td>1.00</td> </tr> <tr> <td>680-1,800μF</td> <td>0.60</td> <td>0.87</td> <td>0.95</td> <td>1.00</td> </tr> <tr> <td>2,200-3,300μF</td> <td>0.75</td> <td>0.90</td> <td>0.95</td> <td>1.00</td> </tr> </tbody> </table>	Capacitance (μ F)	120Hz	1kHz	10kHz	100kHz	470 μ F	0.50	0.85	0.94	1.00	680-1,800 μ F	0.60	0.87	0.95	1.00	2,200-3,300 μ F	0.75	0.90	0.95	1.00
Capacitance (μ F)	120Hz	1kHz	10kHz	100kHz																	
470 μ F	0.50	0.85	0.94	1.00																	
680-1,800 μ F	0.60	0.87	0.95	1.00																	
2,200-3,300 μ F	0.75	0.90	0.95	1.00																	
Endurance (Load Life)	The following specifications shall be satisfied when the capacitors are restored to +20°C after subjecting them to DC voltage for 2,000 hours at +105°C with the rated ripple current applied. The sum of the DC voltage and peak AC voltage must not exceed the full rated voltage of the capacitors. Capacitance change: $\leq \pm$ 25% of initial measured value Tan δ (DF) : \leq 200% of initial specified value Leakage current : \leq initial specified value																				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to +20°C after exposing them for 500 hours at +105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements. Capacitance change: $\leq \pm$ 25% of initial measured value Tan δ (DF) : \leq 200% of initial specified value Leakage current : \leq initial specified value																				

Part Numbering System for KZJ Series

When ordering, always specify complete catalog number for KZJ Series.

KZJ	6.3	VB	182	M	10X16	LL	
							Lead Length: LL is Standard.
							Case Code: See Case Sizes in Tables.
							Capacitance Tolerance: M = \pm 20%
							Capacitance Value: Expressed in Microfarads. The first two digits are significant figures, and the third digit indicates the number of zeros for capacitance of 100 μ F or more. R indicates the decimal point for capacitance less than 100 μ F (e.g. R18 = .18 μ F; 1R8 = 1.8 μ F; 18R = 18 μ F; 181 = 180 μ F; 182 = 1,800 μ F; 183 = 18,000 μ F).
							Lead Configuration: VB = Radial Lead Terminals.
							DC Rated Voltage: Expressed in Volts (e.g. 6.3 = 6.3WVDC).
							Series Name: Indicates Basic Capacitor Design.

Diagram of Dimensions

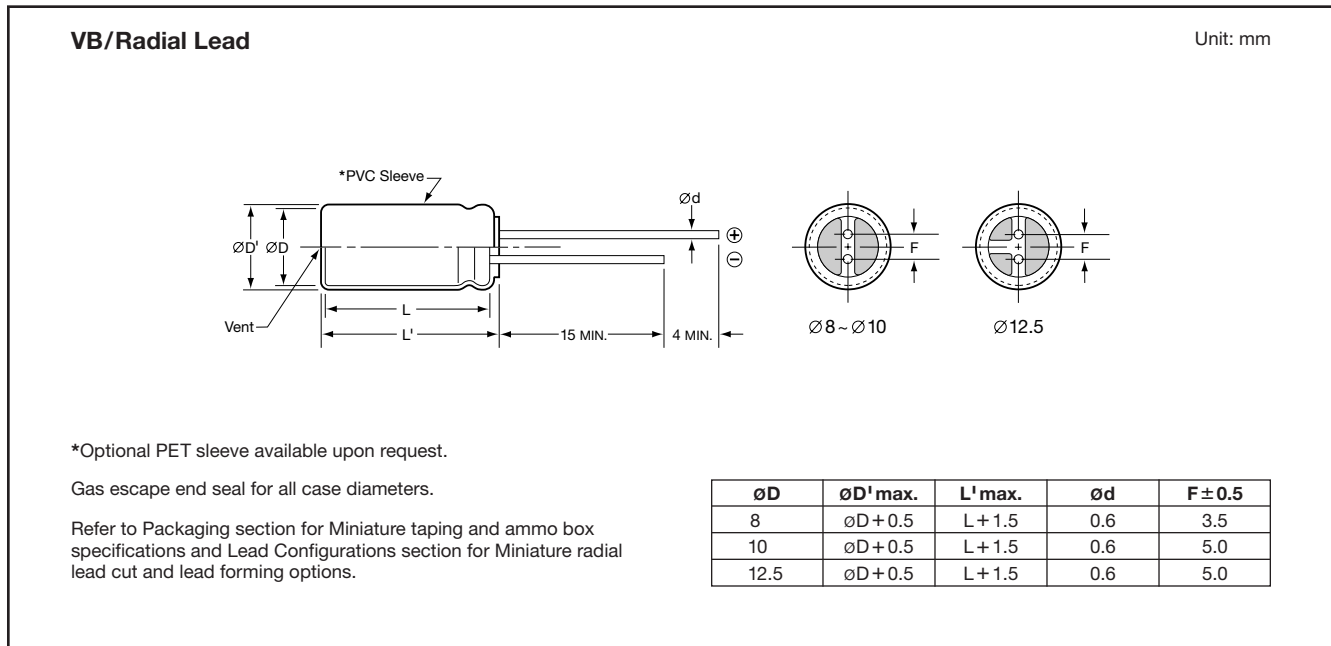

Standard Voltage Ratings - VB/Radial Lead

Rated Voltage (WVDC)	Capacitance (µF)	Catalog Part Number	Nominal Case Size* D × L (mm)	Maximum Impedance (mΩ) at +20°C, 100kHz	Rated Ripple Current (mA rms) at +105°C, 100kHz
6.3 Volts 8 Volts Surge	1,000	KZJ6.3VB102M8X11LL	8 × 11.5	21	1,310
	1,200	KZJ6.3VB122M8X15LL	8 × 15	18	1,850
	1,500	KZJ6.3VB152M8X20LL	8 × 20	12	2,350
	1,500	KZJ6.3VB152M10X12LL	10 × 12.5	18	1,960
	1,800	KZJ6.3VB182M8X20LL	8 × 20	12	2,350
	1,800	KZJ6.3VB182M10X16LL	10 × 16	12.5	2,460
	2,200	KZJ6.3VB222M8X20LL	8 × 20	12	2,350
	2,200	KZJ6.3VB222M8X25LL	8 × 25	11	2,710
	2,200	KZJ6.3VB222M10X16LL	10 × 16	12.5	2,460
	2,200	KZJ6.3VB222M10X20LL	10 × 20	11	2,920
2,700	KZJ6.3VB272M10X20LL	10 × 20	11	2,920	
3,300	KZJ6.3VB332M10X25LL	10 × 25	9	3,230	
10 Volts 13 Volts Surge	680	KZJ10VB681M8X11LL	8 × 11.5	21	1,310
	1,000	KZJ10VB102M8X15LL	8 × 15	18	1,850
	1,000	KZJ10VB102M10X12LL	10 × 12.5	18	1,960
	1,500	KZJ10VB152M8X20LL	8 × 20	12	2,350
	1,500	KZJ10VB152M8X25LL	8 × 25	11	2,710
	1,500	KZJ10VB152M10X16LL	10 × 16	12.5	2,460
	1,800	KZJ10VB182M10X20LL	10 × 20	11	2,920
	2,200	KZJ10VB222M10X25LL	10 × 25	9	3,230
16 Volts 20 Volts Surge	470	KZJ16VB471M8X11LL	8 × 11.5	21	1,310
	680	KZJ16VB681M8X15LL	8 × 15	18	1,850
	680	KZJ16VB681M10X12LL	10 × 12.5	18	1,960
	1,000	KZJ16VB102M8X20LL	8 × 20	12	2,350
	1,000	KZJ16VB102M8X25LL	8 × 25	11	2,710
	1,000	KZJ16VB102M10X16LL	10 × 16	12.5	2,460
	1,500	KZJ16VB152M10X20LL	10 × 20	11	2,920
	1,800	KZJ16VB182M10X25LL	10 × 25	9	3,230
	2,200	KZJ16VB222M12X20LL	12.5 × 20	9	3,220
	2,700	KZJ16VB272M12X25LL	12.5 × 25	8	3,370

*The case sizes in table are with no sleeve, refer to diagram for case sizes with sleeve.