


## Conductive Polymer Capacitors

General Catalog



### SP-Cap™

Conductive Polymer  
Aluminum Electrolytic Capacitors



### POSCAP™

Conductive Polymer  
Tantalum Solid Capacitors



### OS-CON™

Conductive Polymer  
Aluminum Solid Capacitors







### Hybrid

Conductive Polymer Hybrid  
Aluminum Electrolytic Capacitors



# Electrolytic capacitors with conductive polymer to meet the needs of all electronic equipments in the world

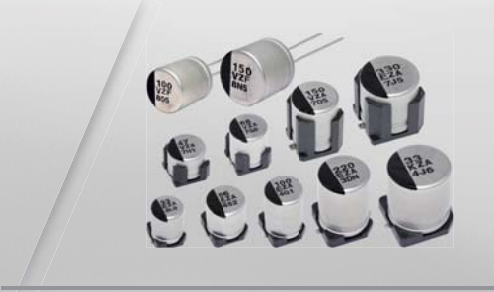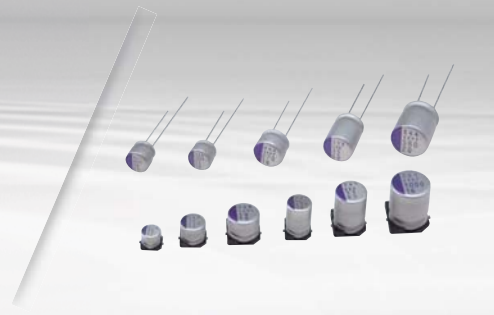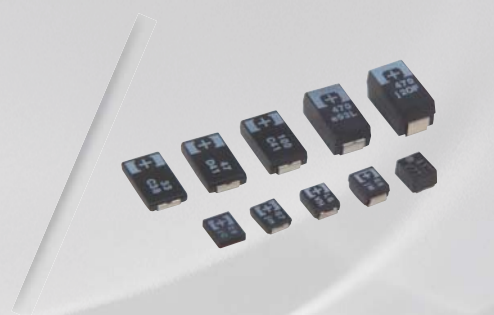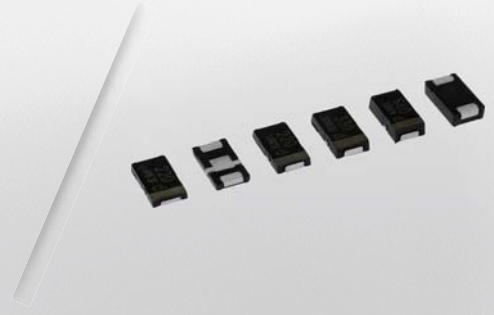

## SP-Cap, POSCAP, OS-CON, Hybrid

By using a high conductive polymer as the electrolyte, it has achieved in lower equivalent series resistance that could help and contribute excellent noise reduction and smoothing to an electrical fluctuation. In addition to that, that has excellence in product operational life, reliability and heat resistance.

### Features \* For details, see the right page

<b>Low ESR</b>	<b>Temperature characteristics</b>	<b>Small size / Low profile</b>
<ul style="list-style-type: none"> <li>● Suitable as a decoupling capacitor to remove noises, because its impedance has ideal frequency characteristics.</li> <li>● Suitable as a smoothing capacitor for switching power supply or a backup capacitor for CPU because it allows large ripple current.</li> <li>● Suitable as a backup capacitor for the circuits that consumes large current at a high speed.</li> </ul>	<ul style="list-style-type: none"> <li>● ESR has stable characteristics at when operating between -55 °C and 105 °C (some up to 150 °C), suitable for applications used at low temperatures (under 0 °C).</li> </ul>	<b>Rush current resistance characteristics</b>
	<b>Long life</b>	<b>Wide capacitance range</b>
	<b>Super low ESR</b>	<b>High voltage High reliability</b>
		<b>Environmental responsibility</b>

## PRECAUTIONS

- The contents of this catalog are current as of March 2020. They may change without prior notice. When ordering products, please be sure to request a delivery specifications form and read it carefully.
- Products described herein are not intended for applications requiring extremely high reliability (for example, those in which extensive human injury or property damage may occur such as life-support systems and automotive or aircraft control systems).
- The performance, characteristics, and features of the products described in this catalog are based on the products working alone under prescribed conditions. Data listed here is not intended as a guarantee of performance when working as part of any other product or device. In order to detect problems and situations that cannot be predicted beforehand by evaluation of supplied data, please always perform necessary performance evaluations with these devices as part of the product that they will be used in.
- When using the products listed in this catalog, please always be sure to try to prevent any possible accidents or injury by designing products in a careful and safe manner. If you have any questions concerning the use of these products, please contact any of our sales representatives.
- For any products listed in this catalog that may constitute restricted trade goods under overseas exchange or service trade laws, permission to deliver according to law may be required before importing.
- The unauthorized duplication from this catalog is forbidden firmly.

P3 Environmental responsibility / ISO / IATF (ISO/TS) Certified  
P4 Notices / Items to be observed

P5 Polymer Capacitor of Panasonic  
P7 SP-Cap/POSCAP Voltage & Capacitance

P9 OS-CON/Hybrid Voltage & Capacitance

## Conductive Polymer Aluminum Electrolytic Capacitors

# SP-Cap™

Environmental responsibility

RoHS compliance  
Halogen free

Long life

Endurance 105 °C 2000 h

Small size / Low profile

Height 1.0 mm max.

Super low ESR

3 mΩ max.

Wide capacitance range

10 μF to 820 μF

Selection guide

Surface mount type

P13	Guidelines and Precautions
P16	Mounting specifications / Packing specifications
P17	Line-up
P18	Series system diagram
P19	Products list
P21	CS/CT/CX
P23	SX
P25	GX/GX-L
P26	LX
P27	SR/LR/SS/LS/ST/LT
P29	GY
P30	CY/SY
P31	HX
P33	Catalog EOL models

## Conductive Polymer Tantalum Solid Capacitors

# POSCAP™

Environmental responsibility

RoHS compliance  
Halogen free

Long life

Endurance 105 °C 2000 h

Wide capacitance range

3.9 μF to 1500 μF

Super low ESR

5 mΩ max.

High voltage  
High reliability

35 V max.

Small size / Low profile

L3.5 x W2.8 x H1.1 mm

Rush current resistance characteristics

The rush current is guaranteed at 20 A.

Selection guide

Surface mount type

P37	Guidelines and Precautions
P39	Mounting specifications / Packing specifications
P41	Line-up
P43	Series system diagram
P45	Products list
P47	TPG
P48	TPSF
P49	TPE
P53	TPF
P54	TQS
P55	TQC
P57	TA
P58	TV
P59	TH
P60	TPB
P61	TC
P63	TDC
P64	TPC
P65	Catalog Deletion models
P66	EOL Models

## Conductive Polymer Aluminum Solid Capacitors

# OS-CON™

Environmental responsibility

RoHS compliance  
Halogen free

Long life

Endurance 105 °C 20000 h  
Endurance 125 °C 1000 h

Wide capacitance range

3.3 μF to 2700 μF

Low ESR

5 mΩ max.

High voltage  
High reliability

100 V max.

Selection guide

Surface mount type

Radial lead type

P69	Guidelines and Precautions
P73	Mounting specifications / Packing specifications
P77	Line-up
P79	Series system diagram
P81	Products list
P83	SVPT
P85	SVF
P87	SVPK
P89	SXV
P90	SVPG
P91	SVPF
P93	SVPA
P95	SVPC
P97	SVPB
P98	SVPD
P99	SVPS
P101	SVPE
P102	SVQP
P103	SVP
P105	SEK
P106	SEF
P107	SEPG
P108	SXE
P109	SEPF
P111	SEPC
P113	SEQP
P115	SEP
P117	Catalog EOL Models

## Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

# Hybrid

Environmental responsibility

RoHS compliance

Long life

(SMD) Endurance 125 °C 4000 h  
(SMD) Endurance 145 °C 2000 h  
(Radial lead) Endurance 150 °C 1000 h

Wide capacitance range

10 μF to 560 μF

High voltage  
High reliability

80 V max.

Selection guide

Surface mount type

Radial lead type

P121	Guidelines and Precautions
P125	Mounting specifications / Packing specifications
P127	Line-up
P129	Series system diagram
P130	Products list
P131	ZA
P133	ZC
P135	ZK
P137	ZKU
P139	ZE
P141	ZS
P143	ZF



# Environmental responsibility

## Industrial Solutions Company, Panasonic Corporation

### Principle

Industrial Solutions Company Group, Panasonic Corporation, fulfills both environmental contribution and business growth, takes care of biodiversity, and contributes to create harmonization of environment, economy and society and to achieve a sustainable society.

### RoHS compliance

All capacitors comply with RoHS directive (2011/65/EU) and (EU)2015/863.

#### Restricted Substance

Restricted substances of RoHS directive
Cadmium(Cd) and it's compounds
Lead(Pb) and it's compounds
Mercury(Hg) and it's compounds
Hexavalent chromium(Cr <sup>+6</sup> )
Polybrominated biphenyls(PBBs)
Polybrominated diphenyl ethers(PBDEs)

### Lead-free stance

All complete parts and homogenous materials of capacitors are lead-free.(JEITA, PHASE3)

## ISO/IATF (ISO/TS) Certified

### (1) Quality Approval

Factory	Site	Applicable standard	Organization	Certificate number	Acquisition years
Uji factory	Kyoto	ISO 9001:2015	JQA	JQA-2524	1998. 7.31
		IATF 16949:2016	JQA	JQA-AU0162-14	2016. 9.13
Yamaguchi factory	Yamaguchi	ISO 9001:2015	JQA	JQA-2524	1998. 7.31
		IATF 16949:2016	JQA	JQA-AU0162-1	2007. 2.23
Panasonic Industrial Devices Saga Co., Ltd. (Former:SAGA SANYO Industries Co., Ltd.)	Saga	ISO 9001:2015	JQA	JQA-2524	1998. 7.31
		IATF 16949:2016	JQA	JQA-AU0162-10	2006. 7.31
PIDSG	Singapore	ISO 9001:2015	BSI	FM 612824	1994.12. 8
PICID(Former:SJC)	Indonesia	ISO 9001:2015	SGS	ID17/03853	2006. 3.26
		IATF 16949:2016	SGS	ID19/04510	2011. 3. 1

### (2) Environment Approval

Factory	Site	Applicable standard	Organization	Certificate number	Acquisition years
Uji factory	Kyoto	ISO 14001:2015	JACO	EC10J0027	1996.12.26
Yamaguchi factory	Yamaguchi	ISO 14001:2015	JACO	EC10J0027	1997.12.22
Panasonic Industrial Devices Saga Co., Ltd. (Former:SAGA SANYO Industries Co., Ltd.)	Saga	ISO 14001:2015	JACO	EC10J0027	1998. 3.10
PIDSG	Singapore	ISO 14001:2015	AJA	AJA98/1151	1998. 4. 9
PICID(Former:SJC)	Indonesia	ISO 14001:2015	SGS	16/03617	2010. 2.15
		ISO 14001:2015	SGS	17/04090	2011.11. 4



# Notices / Items to be observed

## Notices

### Applicable laws and regulations

- This product complies with the RoHS Directive (Restriction of the use of certain Hazardous substances in electrical and electronic equipment (DIRECTIVE 2011/65/EU) and (EU) 2015/863.
- No Ozone Depleting Chemicals(ODC's), controlled under the Montreal Protocol Agreement, are used in producing this product.
- We do not use PBBs or PBDEs as brominated flame retardants.
- Export procedure which followed export related regulations, such as foreign exchange and a foreign trade method, on the occasion of export of this product.
- These products are not dangerous goods on the transportation as identified by UN(United Nations) numbers or UN classification.

### Limited applications

- This capacitor is designed to be used for electronics circuits such as audio/visual equipment, home appliances, computers and other office equipment, optical equipment, measuring equipment.
- An advanced specification must be signed individually for high-reliability use that might threaten human life or property due to a malfunction of the capacitor.

### Intellectual property rights and licenses

- The technical information in this specification provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.

## Items to be observed

### For specification


- This specification guarantees the quality and performance of the product as individual components. The durability differs depending on the environment and the conditions of usage. Before use, check and evaluate their compatibility with actual conditions when installed in the products. When safety requirements cannot be satisfied in your technical examination, inform us immediately.
- Do not use the products beyond the specifications described in this document.

### When using this capacitor in a product where safety is critical



- Though, we are confident in the product quality, we cannot deny the possibility that they could fail due to short or open circuit.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating rotating equipment, and disaster/crime prevention equipment.
  - The system is equipped with a protection circuit and protection device.
  - The system is equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault.

### Conditions of use

- Before using the products, carefully check the effects on their quality and performance, and determined whether or not they can be used. These products are designed and manufactured for general-purpose and standard use in general electronic equipment. These products are not intended for use in the following special conditions.
  - (1) In liquid, such as Water, Oil, Chemicals, or Organic solvent.
  - (2) In direct sunlight, outdoors, or in dust.
  - (3) In vapor, such as dew condensation water of resistive element, or water leakage, salty air, or air with a high concentration corrosive gas, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, or NO<sub>x</sub>.
  - (4) In an environment where strong static electricity or electromagnetic waves exist.
  - (5) Mounting or placing heat-generating components or inflammables, such as vinyl-coated wires, near these products.
  - (6) Sealing or coating of these products or a printed circuit board on which these products are mounted, with resin and other material.
  - (7) Using solvent, water or water-soluble cleaner for flux cleaning agent after soldering.  
(In particular, when using water or a water-soluble cleaning agent, be careful not to leave water residues)
  - (8) Using in the atmosphere which strays Acid or alkaline.
  - (9) Using in the atmosphere which there are excessive vibration and shock.
  - (10) Using in the atmosphere where there are low pressure or decompression.
- Please arrange circuit design for preventing impulse or transitional voltage.  
Do not apply voltage, which exceeds the full rated voltage when the capacitors receive impulse voltage, instantaneous high voltage, high pulse voltage etc.
- Electrolyte is used in the products. Therefore, misuse can result in rapid deterioration of characteristics and functions of each product. Electrolyte leakage damages printed circuit and affects performance, characteristics, and functions of customer system.

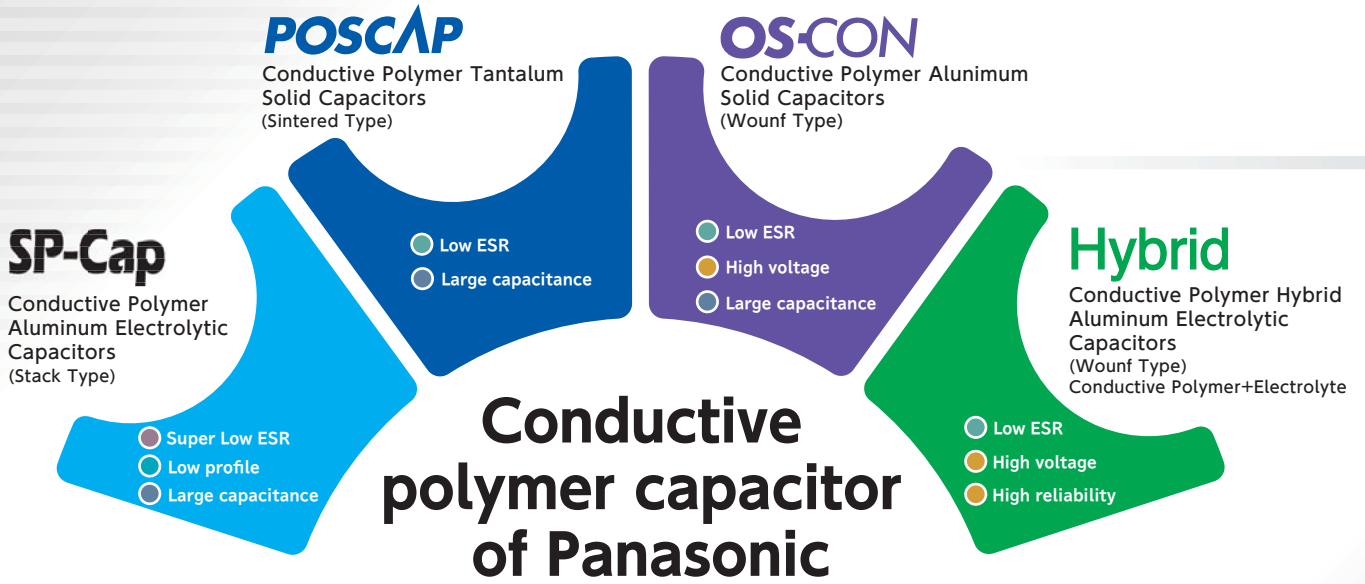


## Characteristics Portfolio Full coverage of the capacitor conductive market

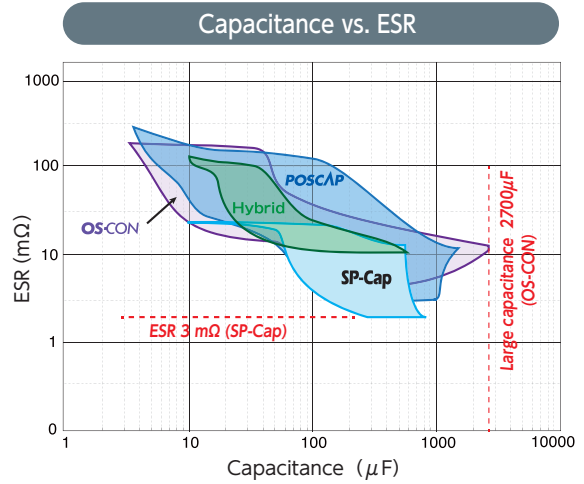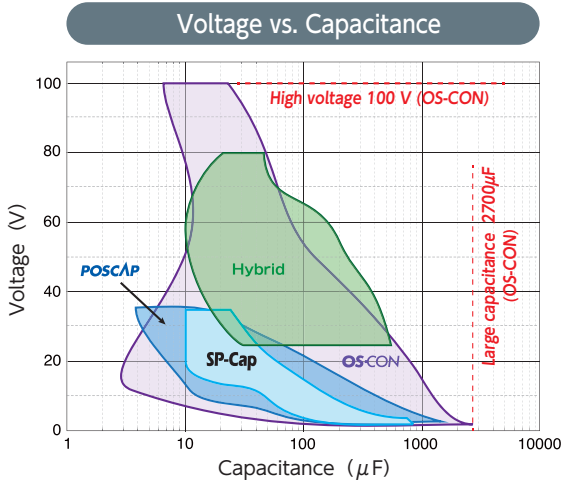


## Basic structure


### SP-Cap

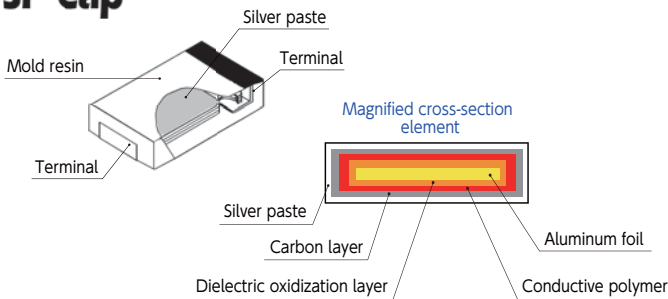

### POSCAP

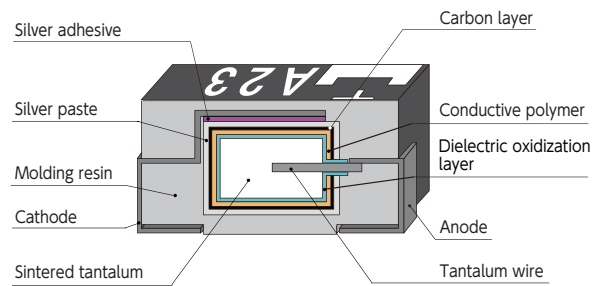


### OS-CON Hybrid

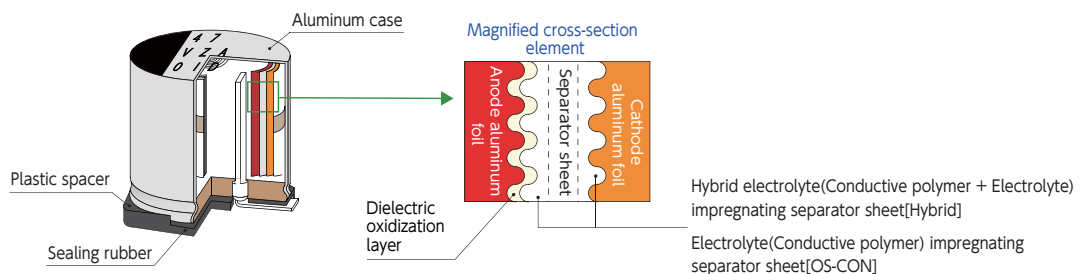


# Total Solutions

## Examples of common use case four conductive products

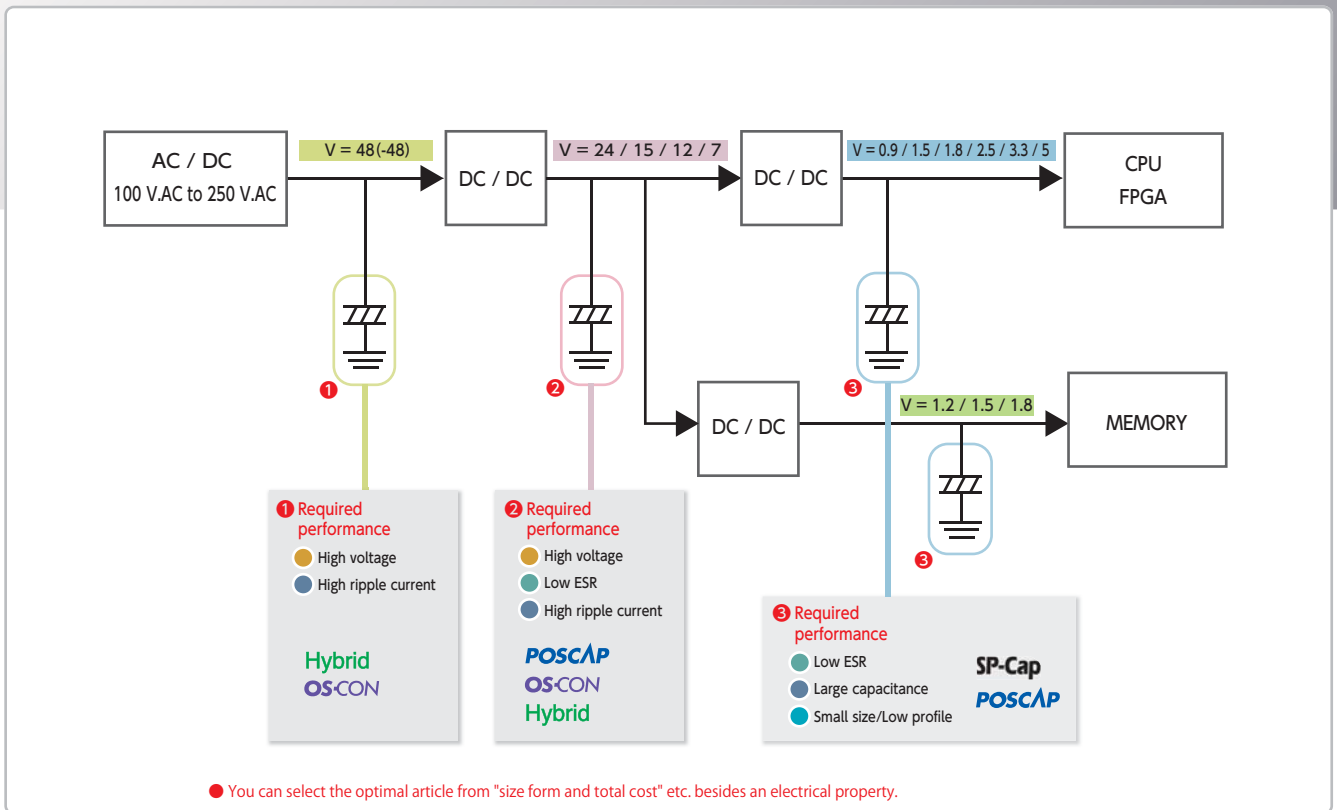

## Application

	SP-Cap	POSCAP	OS-CON	Hybrid
Laptop computer	●	●		
Desktop computer			●	●
Audio/Visual	●	●	●	●
Server	●	●	●	●
Communications infrastructure	●	●	●	●
Smart phone Tablet	●	●		
Automotive		●*		●
Home appliance			●	●
Industry	Industrial equipment	●	●	●
	Industrial robot		●	●
	Drone etc.	●	●	

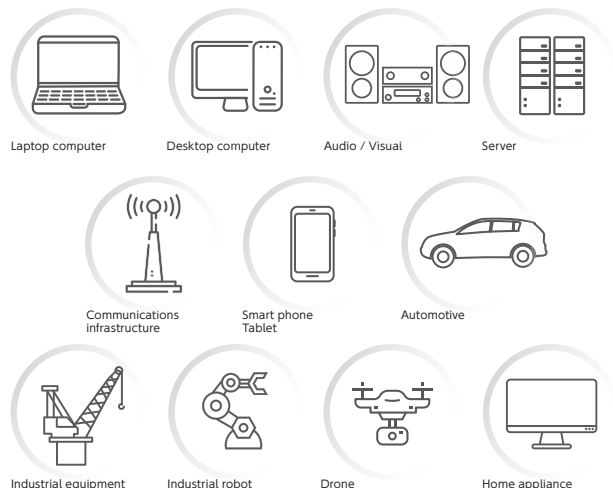

\* This product is not intended for use in any driving application or any other critical functions that affect passenger safety (e.g. Powertrain, ABS, Engine ECU, Airbag, etc.) If the intended use of TA/TV series products is for use in other automotive related applications, please contact our sales team.  
 All requests are subject to approval.

● Main market



# Voltage & Capacitance

SP-Cap POSCAP

Series (ESR mΩ) [Size] (Ripple A rms)

V	μF	3.9	4.7	5.6	6.8	8.2	10	15	22	33	47	56	68	82
2.0														
2.5														
4.0													TPB [B2] (70) (1.1)	SX [D] (9) (6.3)
6.3										TPB [B2] (70) (1.1)	TA [B2] (70) (1.1) TPC [B1] (55/70) (1.1/1.0)		CS [D] (15) (5.1) SR [D] (9) (6.3) LR [D] (9) (6.3) TA [B2] (70) (1.1) TPB [B2] (70) (1.1)	
8.0									TPC [B1] (70) (1.0)		TPG [B1G] (70) (1)			
10									TPB [B2] (70) (1.1)		CS [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TPG [B1G] (70) (1.0) TPE [B2] (35) (1.4) TA [B2] (70) (1.1) TPB [B2] (70) (1.1)		CT [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TPE [D2E] (25) (2.4) TA [D2E] (25) (2.4) TV [D2E] (25) (2.4) TPC [D2] (45) (1.7) THC [D2] (45) (1.7)	
12.5							TPC [B1] (80) (0.8)	TPC [B1] (80) (0.8)		TPG [B1G] (70) (1)				
16							TQC [B2] (100) (0.8)	CS [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [B2] (90) (1.0)	CS [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [B2] (90) (1.0)	TQS [B1S] (70) (1.8) TQC [B2] (90) (1.0) TQC [D12] (40) (1.8) TQC [D2] (70) (1.4) TDC [B2] (90) (1.0)	CT [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [D15] (55) (1.5) TQC [D2] (55/40) (1.45/1.8)		CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [D2] (50) (1.5)	
20							TQC [B2] (100) (0.8)	CS [D] (40) (3.2)	CS [D] (40) (3.2)	CS [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [B2] (90) (1.0)	CT [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [D15] (55) (1.5) TQC [D2] (55) (1.45)		CX [D] (40) (3.2) HX [D] (40) (3.2)	
25				TQC [B2] (100) (0.8)			CS [D] (40) (3.2) TQS [B1S] (100) (1.0) HX [D] (40) (3.2) TQC [D2] (100) (0.9) TQC [D2] (90/45) (1.0/1.5) TDC [B2] (100) (0.9)	CS [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [D15] (70) (1.4) TQC [D2] (60/45) (1.4/1.5)	CT [D] (40) (3.2) CX [D] (40) (3.2) HX [D] (40) (3.2) TQC [D2] (60) (1.4)	CX [D] (40) (3.2) TQC [D2] (60) (1.4)			TQC [D3L] (70) (1.4) TQC [D3] (70) (1.4)	
35		TQC [B2] (400) (0.5)					CS [D] (40) (3.2) TQC [D2] (120) (1.0)	CT [D] (40) (3.2) CX [D] (40) (3.2) TQC [D2] (150) (0.9)	CX [D] (40) (3.2)					

Size code

SP-Cap LxWxH

D	7.3×4.3×1.0 max.	SR, LR
	7.3×4.3×1.1	CS, SS, LS
	7.3×4.3×1.4	CT, ST, LT
	7.3×4.3×1.9	CX, SX, GX, LX, GX-L, HX

(unit : mm)

POSCAP LxWxH

D 7.3×4.3×2.8 CY, SY, GY

B1, B1G, B1S	3.5×2.8×1.1
B15G	3.5×2.8×1.4
B2, B2S	3.5×2.8×1.9

V	μF	100	120	150	180	220	270	330	390	470	560	680	1000	1500					
2.0					SX [D] (9)(6.3)	CX [D] (15)(5.1) SX [D] (9)(6.3) SR [D] (4.5/6)(8.5/7.5) LR [D] (4.5/6)(8.5/7.5) SS [D] (6)(7.5) LS [D] (6)(7.5) TPF [D2E] (6)(4.7)	CX [D] (12)(5.6) SX [D] (4.5/6)(8.5/7.5/6.3) TPSF [B2S] (9/6)(2.4/3.2) TPH [A14] (7)(7.0) LT [D] (6)(7.5) TPF [D2E] (6)(4.7)	CX [D] (15)(5.1/5.6) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/13)(2.0/2.0) TPF [D2E] (6)(4.7)	CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/11)(2.3/2.3)	CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/12)(3.1/3.5)	CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/12)(3.1/3.5)		GY [D] (3)(10.2)						
	2.5	TPU [S09] (150)(0.51) TPH [A09] (150)(0.51)		SX [D] (9)(6.3)	SX [D] (9)(6.3) SR [D] (4.5/6)(8.5/7.5) SS [D] (6)(7.5) LS [D] (6)(7.5)	SX [D] (9)(6.3) SR [D] (4.5/6)(8.5/7.5) SS [D] (6)(7.5) LS [D] (6)(7.5)	CX [D] (15)(5.1) SX [D] (9/7)(6.3/7.0) TPG [B1G] (70)(1.0) TPH [B15G] (30)(1.4) TPE [B2] (17/7.2)(1.7/2.6) TPE [D2E] (23/27)(2.7/5.1) TA [D2E] (25/19)(2.4/3.1) THC [D2] (45)(1.7)	SX [D] (7)(7.0) ST [D] (6)(7.5) LT [D] (6)(7.5) TPSF [B2S] (6)(3.2)	CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/13)(2.0/2.0) TPF [D2E] (6)(4.7)	CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/11)(2.3/2.3)	CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/12)(3.1/3.5)	CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) CX [D] (15)(5.1) SX [D] (4.5/6)(8.5/7.5/6.3) LX [D] (6/4.5)(7.5/8.5) TPE [B2] (15/12)(3.1/3.5)	GY [D] (3)(10.2) TPF [D3L] (70/76)(4.4/4.4) TPF [D4] (5)(6.1) TPF [D3L] (25/15)(2.4/3.1) HX [D] (15/12)(3.1/3.5) TPF [D3L] (7/6)(4.4/4.4) TCE [D3L] (5)(6.1)	TPF [D4] (6/5)(5.6/6.1) TPE [D4] (15)(3.9) TCE [D4] (15)(3.9) TCF [D4] (6/5)(5.6/6.1)	TPE [D4] (15/12)(3.9/4.4)				
		4.0		SX [D] (9)(6.3) TPE [B2] (35)(1.4) TPH [B2] (70)(1.1)	CS [D] (15)(5.1) SR [D] (9)(6.3)	CX [D] (15)(5.1) SX [D] (9/7)(6.3/7.0) TPH [A14] (70)(0.74) TPF [D2E] (18)(2.8) TCE [D2E] (18)(2.8)	CT [D] (15)(5.1) CX [D] (15)(5.1/5.6) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	TPF [D4] (10)(4.4) TCF [D3L] (10)(4.4)					
			6.3			CX [D] (40)(3.2) SX [D] (7)(7.0) TPH [A09] (70)(0.74) TPG [B1G] (70)(1.0) TPE [B2] (35/25)(1.4/1.6) TPE [D2E] (25/18)(2.4/2.8) TPC [D2] (45)(1.7) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1/5.6) SX [D] (9)(6.3) TPG [B15G] (70/35)(1.0/1.2) TPE [D2E] (25/18)(2.4/2.8) TPH [B2] (35/25)(1.4/1.6) TA [D2E] (25/18)(2.4/2.8) TV [D2E] (25)(2.4) THB [D3L] (40)(2.0) THC [D2] (40)(1.9) THE [D2E] (18/29)(2.4/2.4) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	CX [D] (15)(5.1) SX [D] (9)(6.3) TPG [B1G] (70)(1.0) TPE [B2] (35)(1.4) TPE [D2E] (25/18)(2.4/2.8) TA [D2E] (25/18)(2.4/2.8) THC [D2] (15/18)(2.4/2.8) TCE [D2E] (25/18)(2.4/2.8)	TPF [D4] (10)(4.4) TPE [D15E] (35)(1.7) TPF [D4] (25/18)(3.0/3.5) THB [D4] (35)(3.0) TCE [D4] (25/18)(3.0/3.5) TCF [D4] (10)(4.4)	TPF [D4] (10)(4.4) TCF [D3L] (25/18)(3.0/3.5)
				8.0		TPE [B2] (35)(1.4) CX [D] (40)(3.2) HX [D] (40)(3.2) TPC [D2] (45)(1.7)		TPC [D2] (40)(1.9) TPF [D3L] (15)(3.6) TA [D3L] (25)(2.4) TV [D3L] (25)(2.4) TPB [D3L] (40)(2.0) TCE [D3L] (15)(3.6)		TPF [D3L] (25/18)(2.4/2.8) TA [D3L] (25)(2.4) TPB [D3L] (40)(2.0) TPB [D4] (40)(3.0) THB [D4] (40)(3.0) TCE [D3L] (25/18)(2.4/2.8)		TPF [D4] (25)(3.0) TA [D3L] (25)(2.4) TPB [D4] (35)(3.0) THB [D4] (35)(3.0) TCE [D4] (25)(3.0)		TPF [D4] (25)(3.0) TA [D3L] (25)(2.4) TPB [D4] (35)(3.0) THB [D4] (35)(3.0) TCE [D4] (25)(3.0)					
					10														
						12.5													
							16												
				20															
					25														
35																			

(unit : mm)

D12	7.3×4.3×1.15
D15, D15E	7.3×4.3×1.4
D2E	7.3×4.3×1.8
D2	7.3×4.3×1.9

D3L	7.3×4.3×2.8
D4	7.3×4.3×3.8

# Voltage (More than 16v) & Capacitance

## SMD type

Series [Size]  
(ESR mΩ) (Ripple A rms)

Product of 105 °C ■ OS-CON ■ Hybrid

V	μF	3.3	10	15	18	22	27	33	39	47	56	68	82	100	120
16		SVP [A5] (260) (0.66)		SVP [B6] (120) (1.02)		SVPS [B6] (90) (1.06) SVP [B6] (90) (1.06)		SVPB [C5] (40) (1.67)	SVPA [C6] (35) (2.04) SVP [C6] (24) (2.46) SVPC [B6] (35) (1.82) SVPC [B6] (27) (2.35) SVPS [C6] (24) (2.46) SVP [C6] (50) (1.62)	SVPG [B45] (25) (3.2)	SVP [E7] (45) (1.89)	SVPC [C6] (30) (2.2) SVPC [C6] (25) (2.44)	SVPA [E7] (30) (2.76) SVPS [E7] (30) (2.76)	SVPC [C6] (24) (2.49) SVPS [F8] (35) (2.67)	SVPC [E7] (27) (2.9)
	20		SVPA [B6] (40) (1.7) SVP [B6] (120) (1.02)	SVPB [C5] (45) (2.0)		SVPA [C6] (35) (2.04) SVPB [C55] (35) (2.0) SVPS [C6] (60) (1.45) SVP [C6] (60) (1.45)	SVP [C6] (60) (1.45)	SVPG [B45] (27) (3.0) SVP [E7] (45) (1.89)		SVPA [E7] (33) (2.63) SVPS [E7] (45) (1.89) SVP [E7] (45) (1.89)	SVPF [B6] (30) (2.8) SVP [F8] (40) (2.4)	SVP [F8] (40) (2.4)			SVP [E12] (24) (3.32)
25			SVPS [E7] (60) (1.5) SVPG [B45] (30) (2.8)		ZA [C] (80) (0.9)	SVPF [B6] (40) (2.45)	ZA [D] (80) (0.9)			SVPF [C6] (30) (2.8) ZA [D] (50) (1.3)	SVPF [C6] (30) (2.8) ZA [D] (50) (1.3)		SVPF [E7] (28) (3.0)	SVPF [E7] (24) (3.2)	
35		ZA [C] (100) (0.9)			SVPF [C6] (35) (2.6) ZA [C] (100) (0.9)	ZA [D] (60) (1.3)	ZA [D] (60) (1.3)	SVPF [E7] (30) (2.8)		ZA [D] (60) (1.3)		ZA [D8] (30) (2.0)	SVPF [E12] (20) (4.0)	ZA [F] (27) (2.3)	SVPF [F12] (18) (4.4)
50		SVPF [C6] (40) (2.5) ZA [C] (120) (0.75)		SVPF [E7] (35) (2.7)	ZA [D] (80) (1.1)		ZA [D8] (40) (1.6)	SVPF [E12] (25) (3.8)	ZA [F] (30) (1.8)		ZA [D] (30) (1.8)	SVPF [F12] (20) (4.3) ZA [F] (30) (1.8)		ZA [G] (28) (2.0)	
63		ZA [D] (120) (1.0)			ZA [D8] (80) (1.5)		ZA [F] (40) (1.7)		ZA [F] (40) (1.7)	ZA [G] (30) (1.8)	ZA [G] (30) (1.8)	ZA [G] (30) (1.8)	ZA [G] (30) (1.8)		
80					ZA [F] (45) (1.55)		ZA [G] (36) (1.7)								

Product of 125 °C

V	μF	6.8	8.2	10	12	15	18	22	27	33	39	47	56	68	82
16											SVQP [C6] (50) (0.512)				SVF [B6] (27) (0.94) SVPD [E7] (40) (0.67) SVQP [E7] (40) (0.67)
20								SVQP [C6] (60) (0.459)				SVQP [E7] (45) (0.598)	SVF [B6] (30) (0.88)	SVPK [B6] (30) (0.88)	
25				SVPD [C6] (65) (0.474)				SVPD [E7] (48) (0.58) ZC [C] (80) (0.55)	SVF [B6] (40) (0.77)	SVPK [B6] (35) (0.82)	SVPD [F8] (45) (0.664)	SVF [C6] (30) (0.88) SVPD [E12] (30) (0.943) ZC [D] (50) (0.9)	SVF [C6] (30) (0.88) ZC [D] (50) (0.9)	ZK [D] (30) (1.4)	SVF [E7] (28) (0.94) SVPK [C6] (25) (0.96) SVPD [F12] (28) (1.202) ZK [D] (50) (1.3)
35			SVPD [E7] (70) (0.4)	ZC [C] (100) (0.55)			SVPD [F8] (60) (0.55)	SVF [C6] (35) (0.82) SVPK [B6] (35) (0.82) SVPD [E12] (50) (0.7) ZC [C] (100) (0.55)		ZK [C] (100) (0.66) ZC [D] (60) (0.9)	SVF [E7] (30) (0.88) ZKU [C] (100) (0.75)	SVPK [C6] (27) (0.93) SVPD [F12] (30) (1.15) ZC [D] (60) (0.9)	ZK [D] (60) (1.08)	ZC [D8] (35) (1.4) ZKU [D] (60) (1.2)	SVF [E12] (20) (1.26) SVPK [E7] (25) (0.96)
50			SVF [C6] (40) (0.79) SVPK [B6] (80) (0.55) ZC [C] (120) (0.5)				SVF [E7] (35) (0.85)	SVPK [C6] (35) (0.82) ZC [D] (80) (0.75)		SVPK [E7] (35) (0.85) ZC [D8] (40) (1.1)	SVF [E12] (25) (1.2)	ZC [F] (30) (1.25)			SVF [F12] (20) (1.35) SVPK [E12] (25) (1.2) ZC [F] (30) (1.25)
63			ZC [D] (120) (0.7)			SXV [E7] (60) (0.34)	ZC [D8] (80) (0.9)			SXV [E12] (25) (0.93) ZC [F] (40) (1.1)	SXV [E12] (25) (0.93) SXV [F8] (50) (0.69)		ZC [G] (30) (1.4)	SXV [F12] (25) (1.03) ZC [G] (30) (1.4)	
80					SXV [E7] (60) (0.34)		ZC [F] (45) (1.05)		SXV [E12] (35) (0.78) SXV [F8] (55) (0.66)	ZC [G] (36) (1.36) SXV [E12] (35) (0.78)		SXV [F12] (28) (0.98) ZC [G] (36) (1.36)	SXV [F12] (28) (0.98)		
100		SXV [E7] (60) (0.34)				SXV [F8] (60) (0.63) SXV [E12] (40) (0.73)	SXV [F12] (30) (0.94) SXV [E12] (40) (0.73)	SXV [F12] (30) (0.94)	SXV [F12] (30) (0.94)						

Product of 145 °C

V	μF	33	56	68	82	100	150	220	270	330
25								ZE [F] (27) (0.7)		ZE [G] (20) (0.9)
35							ZE [F] (27) (0.7)		ZE [G] (20) (0.9)	
50				ZE [F] (30) (0.6)	ZE [G] (30) (0.8)	ZE [G] (28) (0.8)				
63	ZE [F] (40) (0.6)	ZE [G] (30) (0.8)								

Size code

OS-CON

Series	Size	Dimensions
B45	φ 5×L4.4	
B6	φ 5×L5.9	
C6	φ 6.3×L5.9	
C65	φ 6.3×L6.4	
C10	φ 6.3×L9.9	
C10L	φ 6.3×L10.4	
E7	φ 8×L6.9	
E10	φ 8×L10.0	
E12	φ 8×L11.9	
F8	φ 10×L7.9	
F10	φ 10×L10.0	
F12	φ 10×L12.6	

(unit : mm)



V \ μF	150	180	220	270	330	390	470	560	1000
16	SVPC [E7] (22) (3.22)	SVPF [C6] (22) (3.3)		SVPG [C8] (10) (5.08)	SVP [F12] (16) (4.72)		SVPE [F12] (10) (6.1)	SVPF [E12] (14) (4.95)	SVPF [F12] (12) (5.4)
	SVP [F8] (30) (3.02)	SVPA [F8] (29) (3.43)		SVPC [C10] (8) (5.8)	SVPG [C10] (6.5) (7.5)			SVPF [E10] (18) (3.9)	SVPF [F10] (16) (4.3)
		SVPS [F8] (29) (3.43)		SVPF [E7] (22) (3.3)					
		SVPE [C10] (11) (4.46)		SVPC [E12] (16) (4.07)					
20	SVP [F12] (20) (4.32)	SVPF [E7] (25) (3.2)				SVPF [E12] (14) (4.95)		SVPF [F12] (12) (5.4)	
25	ZA [F] (27) (2.3)	SVPF [E12] (16) (4.65)	ZA [F] (27) (2.3)		SVPF [F12] (14) (5.0)				
					ZA [G] (20) (2.5)				
35	ZA [F] (27) (2.3)		ZA [G] (20) (2.5)	ZA [G] (20) (2.5)					
50									
63									
80									

V \ μF	100	120	150	180	220	270	330	390	470	560	680	1000	1200
16	SVPK [B6] (27) (0.94)			SVF [C6] (22) (1.04)	SVPK [C6] (22) (1.04)	SVF [E7] (22) (1.04)	SVPK [E7] (22) (1.04)			SVF [E12] (14) (1.56)	SVPK [E12] (14) (1.56)	SVF [F12] (12) (1.7)	SVPK [F12] (12) (1.7)
												SVF [F10] (16) (1.35)	
20		SVF [C6] (25) (1.01)	SVPK [C6] (25) (1.01)	SVF [E7] (25) (1.01)	SVPK [E7] (25) (1.01)				SVF [E12] (14) (1.56)	SVPK [E12] (14) (1.56)	SVF [F12] (12) (1.7)	SVPK [F12] (12) (1.7)	
25	SVF [E7] (24) (1.01)	SVPK [E7] (24) (1.01)	ZK [D8] (30) (1.68)	SVF [E12] (16) (1.47)	ZC [F] (27) (1.6)	SVPK [E12] (16) (1.47)	SVF [F12] (14) (1.58)		SVPK [F12] (14) (1.59)	ZS [G16] (11) (4.0)			
	ZC [D8] (30) (1.4)		ZC [F] (27) (1.6)	ZKU [D8] (30) (1.8)		ZK [F] (27) (1.92)	ZC [G] (20) (2.0)		ZK [G] (20) (2.8)	ZKU [G] (20) (2.8)			
	ZKU [D] (50) (1.3)						ZKU [F] (27) (2.0)						
35	ZK [D8] (35) (1.68)	SVF [F12] (18) (1.39)	ZC [F] (27) (1.6)	SVPK [E12] (20) (1.26)	ZC [G] (20) (2.0)	ZC [G] (20) (2.0)	SVPK [F12] (18) (1.39)	ZKU [G] (20) (2.8)	ZS [G16] (11) (4.0)				
	ZC [F] (27) (1.6)	ZKU [D8] (35) (1.7)		ZK [F] (27) (1.92)	ZKU [F] (27) (2.8)		ZK [G] (20) (2.8)						
50													
	ZC [G] (28) (1.6)	SVPK [F12] (20) (1.35)					ZS [G16] (13) (3.7)						
63													
	SXV [F12] (25) (1.03)		ZS [G16] (15) (3.5)										
80													
100													

Hybrid

	C	D8	F	G	G16
	φ 5×L5.8	φ 6.3×L7.7	φ 8×L10.2	φ 10×L10.2	φ 10×L16.5
	φ 6.3×L5.8				

(unit : mm)



# Conductive Polymer Aluminum Electrolytic Capacitors

# SP-Cap™

Selection guide	P13	Guidelines and Precautions
	P16	Mounting specifications Packing specifications
Surface mount type	P17	Line-up
	P18	Series system diagram
	P19	Products list
	P21	CS/CT/CX
	P23	SX
	P25	GX/GX-L
	P26	LX
	P27	SR/LR/SS/LS/ST/LT
	P29	GY
	P30	CY/SY
	P31	HX
P33	EOL Models	

## Applications

### Main market



Laptop computer



Server




Communications infrastructure



Industrial equipment



Audio / Visual



Smart phone  
Tablet



Drone

POSCAP™

OS-CON™

Hybrid



# Guidelines and Precautions

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

CS/CT/CX

SX

GX/GX-L

LX

SR/LR/SS/LS/ST/LT

GY

CY/SY

HX

Catalog EOL models

Selection guide

Surface mount type

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ⚠ Application Guidelines

### 1. Circuit design

#### 1-1 Prohibited circuits for use

Do not use **SP-Cap** with the following circuit.

- (1) Time constant circuits
- (2) Coupling circuits
- (3) 2 or more **SP-Cap's** connected serially
- (4) Circuits which are greatly affected by leakage current
- (5) High-impedance voltage retention circuits

#### 1-2 Voltage & polarity

Application of over-voltage and reverse voltage described below can cause to increase in leakage current and short circuits.

Applied voltage, refers to voltage value including peak value of transitional instantaneous voltage and peak value of ripple voltage, not just steady line voltage.

Design your circuit so that peak voltage does not exceed stipulated voltage.

[Over-Voltage]

Do not apply over-voltage in excess of rated voltage. Do not apply voltage, which exceeds full rated voltage when **SP-Cap** receives impulse voltage, instantaneous high voltage, high pulse voltage etc.

[Reverse-Voltage]

Do not apply reverse-voltage

#### 1-3 Ripple current

Use **SP-Cap** within stipulated permitted ripple current.

When excessive ripple current is applied to **SP-Cap**, it causes increase in leakage current and short circuits due to self-heating.

Even when using **SP-Cap** under permissible ripple current, reverse voltage may occur if DC bias voltage is low.

#### 1-4 Leakage current

There is a risk of leakage current increase even if the following use environments are within the stipulated range.

However, even if leakage current increase **SP-Cap** self-repairing function will reduce leakage current in most cases when a voltage is applied.

- (1) After re-flow
- (2) Shelf conditions such as high temperature with no load, high temperature high humidity with no load and sudden temperature changes.

#### 1-5 Temperature

- (1) Use at or under the rated (guaranteed) temperature.

Operation at temperatures exceeding specifications causes large changes in the **SP-Cap** electrical properties, and deterioration than can potentially lead to failure.

When calculating the operating temperature of the **SP-Cap**, be sure to include not only the ambient temperature and internal temperature of the unit, but also radiation from heat generating elements inside the unit (power transistors, resistors, etc.), possibly be applied unexpected temperature through via and pattern of PCB board, and self-heating due to ripple current.

- (2) Specified ESR is a value at the time of shipping from factory. ESR may change upon use conditions.

#### 1-6 Failure rate

The majority of failure modes are short circuits or increase in leakage current.

The main factors of failure are mechanical stress, heat stress and electric stress due to re-flow and heat from temperature environment.

Even within stipulated limits, it is possible to lower failure rate by reducing use conditions such as temperature and voltage. Please be sure to have ample margin in your design.

[Expected Failure Rate]

- (1) Date based on our reliability tests: 8.2 Fit or less (Based on applied rated voltage at 105 °C)
- (2) Market failure rate: 0.13 Fit or less (Based on c=0, Reliability standard : 60 %)

#### 1-7 Mounting area consideration

Isolate surface of PCB under mounted **SP-Cap**.

## 2. Mounting

### 2-1 When mounting

- (1) Check **SP-Cap** ratings (capacitance and voltage) before mounting.
- (2) Check **SP-Cap** polarity before mounting.
- (3) Check land size for **SP-Cap** before mounting.
- (4) When using a mouter, if the pressure for mounting is too high, then current leak may increase, short-circuiting may occur, or **SP-Cap** may break down or come off.

### 2-2 Soldering

- (1) Reflow soldering  
Be performed by one of following methods.
  - (a) Ambient heat conduction reflow (IR / Hot-air) Refer to the page of "Mounting Specifications".
  - (b) Vapor phase reflow (but only allowable for CX, CT, SX, ST, GX, LX, LT and HX series).  
Contact Panasonic for details of allowable vapor phase reflow condition.
- (2) Wave soldering and dip soldering  
Please remind SP-Cap is NOT compatible.
- (3) Hand soldering  
Excessive force stress to **SP-Cap** should be avoided Conditions :  
Tip temperature of soldering iron : 350 °C max.  
Exposure time : 10 s max.  
※Once removed from printed circuit board for any reason, do not use **SP-Cap** again.

### 2-3 Land size

Refer to the land size of "Mounting specifications" for appropriate design dimensions.  
Circuit board design requires examination of the most suitable dimensions taking conditions such as circuit board, parts and reflow into consideration.

### 2-4 Mechanical stress

Do not apply excessive force to **SP-Cap** this can damage the electrodes and badly affect **SP-Cap** mount ability.  
It can also cause increase of leakage current, separation of the lead wire and element, and damage to **SP-Cap** body, all of which can badly affect electrical performance of **SP-Cap**.

### 2-5 Circuit board cleaning

**SP-Cap** should be cleaned after soldering in accordance with the following conditions.

Temperature : Less than 60 °C

Time : Within 5 min

Be sure to sufficiently wash and dry (20 min at 100 °C) a board afterward.

[Recommended Cleaning Solvents]

Pine Alpha ST-100S, Clean-thru 750H / 750L / 710M, Aqua Cleaner 210SEP, Sunelec B-12

DK Beclear CW-5790, Techno Cleaner 219, Cold Cleaner P3-375, Telpene Cleaner EC-7R

Technocare FRW-17 / FRW-1 / FRV-1, AXREL 32, IPA (Isopropyl alcohol)

- (1) Consult our factory when performing processes with cleaning solvents other than those listed above or deionized water.
- (2) The use of ozone depleting cleaning agents are not recommended for protecting environment.
- (3) In case of using ultrasonic cleaning, the terminals may be broken. Therefore, please test before using in mass production.

## 3.Storage

**SP-Cap** should be stored in moisture proof environment. Storage conditions before and after opening moisture proof packaging as follows.

(If these conditions are exceeded, a package may absorb moisture and there is a risk of damage to exterior due to heat stress during mounting.)

[Environment of Storage]

Temperature: 5 °C to 30 °C without direct sunlight

Humidity : Less than 70 %

Maximum storage term before opening a package (2 years after manufactured)

Maximum storage condition after opening a package (7 days after opening)

**SP-Cap** should be all used within the storage term after opening a package.

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide	Line-up
	Series system diagram
Surface mount type	Products list
	CS/CT/CX
	SX
	GX/GX-L
	LX
	SR/LR/SS/LS/ST/LT
	GY
CY/SY	
HX	

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

# Guidelines and Precautions

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

CS/CT/CX  
SX

GX/GX-L  
LX

SR/LR/SS/LS/ST/LT  
GY

CY/SY  
HX

Catalog EOL models

Selection guide

Surface mount type

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## 4. Transportation

Take sufficient care during handling because excessive vibration, or shock can cause reliability of **SP-Cap** to decrease.

## 5. Emergency procedures

If a **SP-Cap** is overheated, a resin case may emit smoke. If this occurs, immediately switch off the unit's main power supply to stop operation. Keep your face and hands away from **SP-Cap** until temperature is low enough to cause the **SP-Cap** to ignite and burn.

## 6. Discarding

Since **SP-Cap** are composed of various metals and resins, treat them as industrial waste when arranging for their disposal.

The precautions for the use of functional polymer aluminum electrolytic capacitors follow the "Precautionary guidelines for the use of fixed aluminum electrolytic capacitors for electronic equipment", RCR-2367B issued by EIAJ in March 2002. Please refer to the above guidelines for details.  
This document is subject to change without notice.

## Intellectual property right

We, Panasonic Group are providing products and service that customers can use without anxiety, and are working positively on protection of our products under intellectual property rights.  
Representative patents relating to **SP-Cap** are as follows:

US Patent No. 7136276




# Mounting specifications

## Packing specifications

### Recommendable reflow soldering

#### Recommendable reflow soldering

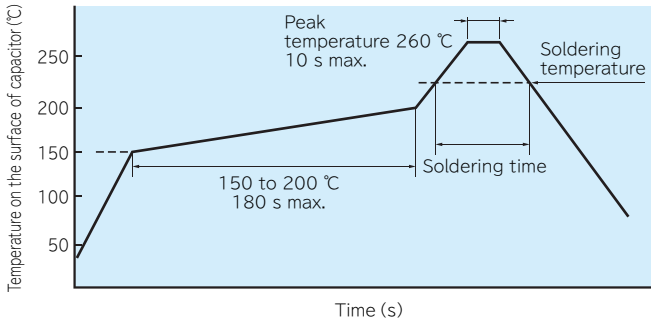

Reflow cycle : 3 max.

Soldering temperature and Soldering time

Temperature	Time
$\geq 255\text{ °C}$	30 s max.
$\geq 230\text{ °C}$	130 s max.
$\geq 217\text{ °C}$	150 s max.

SP-Cap recommended profile condition of the IPC/J-STD-020D standard

### SP-Cap


Guidelines and Precautions
Mounting specifications
Packing specifications
Selection guide
Line-up
Series system diagram
Products list
CS/CT/CX
SX
GX/GX-L
LX
SR/LR/SS/LS/ST/LT
GY
CY/SY
HX
Catalog EOL models

### POSCAP

Guidelines and Precautions
Mounting specifications
Packing specifications
Selection guide

### Land pattern

- Typical land pattern: 2-Terminals For standard terminal (C\*,S\*,G\*,HX Series)
- Typical land pattern: 3-Terminals For Low ESL terminal (L\*, GX-L Series)

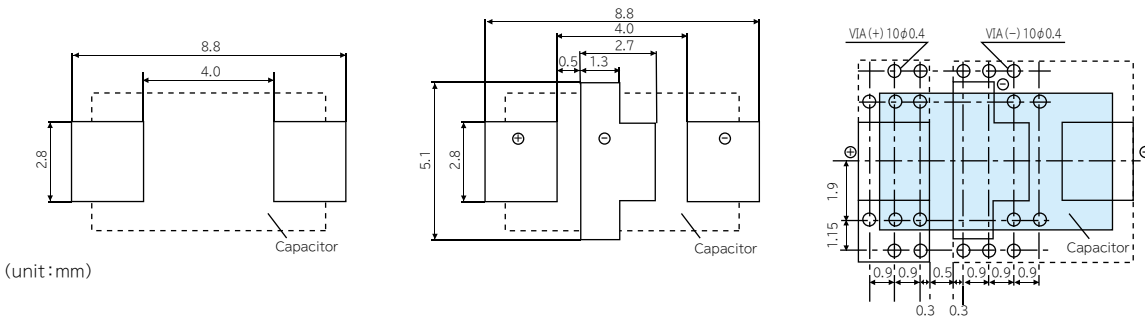

Surface mount type


Catalog Deletion models  
Catalog EOL models

### OS-CON

Guidelines and Precautions
Mounting specifications
Packing specifications
Selection guide

### Packaging specifications

#### Reel Dimensions

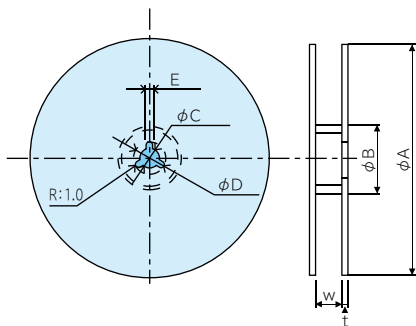


(unit: mm)

Reel	φA	φB	φC	φD	E	W	t
φ330	330	80	13±0.5	21±0.8	2±0.5	14	3

#### Embossed Taping

12 mm tape

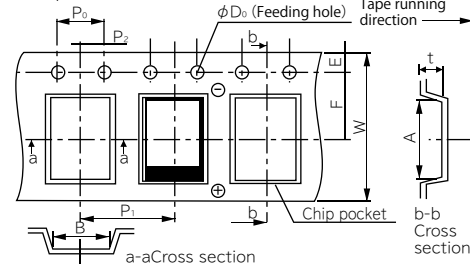

(unit: mm)

A	B	W	F	E	P <sub>1</sub>
7.6±0.2	4.5±0.2	12.0±0.3	5.5±0.1	1.75±0.1	8.0±0.1

P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	t (Series)		
			*R/*S	*T/*X	*Y
2.0±0.1	4.0±0.1	1.5 <sup>+0.1</sup>	1.5±0.2	2.4±0.2	3.5±0.2

Surface mount type

Radial lead type


Catalog EOL models

### Hybrid

Guidelines and Precautions
Mounting specifications
Packing specifications

Selection guide

#### Packaging Box Dimensions (mm)

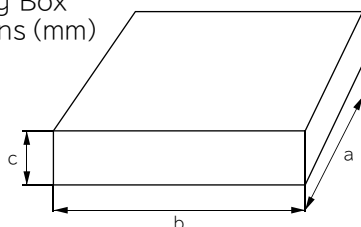

(unit: mm)

Reel	a	b	c
φ330	400 max.	400 max.	135 max.

Surface mount type

Radial lead type

# Line-up

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

**Line-up**

Series system diagram

Products list

CS/CT/CX  
SX  
GX/GX-L  
LX  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Series	Page	Part No.	Features	Low profile	Low ESR	Low ESL	High voltage	High Temperature	Category temperature range (°C)	Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Size (mm)
													L×W 7.3×4.3
CX	21 to 22	EEFCX----	Standard				●		-55 to 105	2 to 35	12 to 40	15 to 560	1.9
CT	21 to 22	EEFCT----		●			●		-55 to 105	4 to 35	15 to 40	15 to 180	1.4
CS	21 to 22	EEFCS----		●			●		-55 to 105	4 to 35	15 to 40	10 to 120	1.1
SX	23 to 24	EEFSX----	Low ESR		●				-55 to 105	2 to 6.3	4.5 to 9	82 to 560	1.9
GX	25	EEFGX----	Super low ESR/High ripple current		●	●			-55 to 105	2 to 2.5	3	330 to 560	1.9
LX	26	EEFLX----	Low ESR/Low ESL		●	●			-55 to 105	2 to 2.5	4.5 to 6	330 to 560	1.9
ST	27 to 28	EEFST----	Low profile/Low ESR	●	●				-55 to 105	2 to 2.5	6	270 to 330	1.4
LT	27 to 28	EEFLT----	Low profile/Low ESR/Low ESL	●	●	●			-55 to 105	2 to 2.5	6	270 to 330	1.4
SS	27 to 28	EEFSS----	Low profile/Low ESR	●	●				-55 to 105	2 to 2.5	6	180 to 220	1.1
LS	27 to 28	EEFLS----	Low profile/Low ESR/Low ESL	●	●	●			-55 to 105	2 to 2.5	6	180 to 220	1.1
SR	27 to 28	EEFSR----	Low profile(1.0 mm max.)/Low ESR	●	●				-55 to 105	2 to 6.3	4.5 to 9	68 to 220	1.0 max.
LR	27 to 28	EEFLR----	Low profile(1.0 mm max.)/Low ESL Low ESR	●	●	●			-55 to 105	2 to 6.3	4.5 to 9	68 to 220	1.0 max.
<b>NEW</b> GY	29	EEFGY---	Super low ESR/ High ripple current / Height 3.0 mm max.		●				-55 to 105	2 to 2.5	3	680 to 820	2.8
CY	30	ECGCY---	Guaranteed at 85°C / Height 3.0 mm max.		●				-55 to 85	4, 6.3	15	330 to 470	2.8
SY	30	ECGSY----	Guaranteed at 85°C / Height 3.0 mm max.		●				-55 to 85	4, 6.3	9	330 to 470	2.8
HX	31 to 32	EEFHX----	Guaranteed at 125 °C		●		●	●	-55 to 125	2 to 25	4.5 to 40	15 to 560	1.9

# Series system diagram

## 2 terminals

### Standard / High Voltage

P.21 to 22  
**CX**  
series  
7.3x4.3x1.9 mm  
2 V / 560  $\mu$ F to  
35 V / 22  $\mu$ F  
ESR:12 m $\Omega$  to 40 m $\Omega$



P.21 to 22  
**CT**  
series  
7.3 x 4.3 x 1.4 mm  
4 V / 180  $\mu$ F to  
35 V / 15  $\mu$ F  
ESR:15 m $\Omega$  / 40 m $\Omega$

P.21 to 22  
**CS**  
series  
7.3 x 4.3 x 1.1 mm  
4 V / 120  $\mu$ F to  
35 V / 10  $\mu$ F  
ESR:15 m $\Omega$  / 40 m $\Omega$

### Guaranteed at 85°C

P.30  
**CY/SY**  
series  
7.3 x 4.3 x 2.8mm  
4 V / 470  $\mu$ F to  
6.3 V / 330  $\mu$ F  
ESR:9 m $\Omega$  / 15 m $\Omega$

### Guaranteed at 125 °C

P.31 to 32  
**HX**  
series  
7.3 x 4.3 x 1.9mm  
2 V / 560  $\mu$ F to  
25 V / 33  $\mu$ F  
ESR:4.5 m $\Omega$  to 40 m $\Omega$

### Low ESR

**NEW** P.29  
**GY**  
series  
7.3 x 4.3 x 2.8 mm  
2 V / 820  $\mu$ F to  
2.5 V / 680  $\mu$ F  
ESR:3 m $\Omega$

P.25  
**GX**  
series  
7.3 x 4.3 x 1.9 mm  
2 V / 560  $\mu$ F to  
2.5 V / 470  $\mu$ F  
ESR:3 m $\Omega$



P.23 to 24  
**SX**  
series  
7.3 x 4.3 x 1.9 mm  
2 V / 560  $\mu$ F to  
6.3 V / 220  $\mu$ F  
ESR:4.5 m $\Omega$  ~ 9 m $\Omega$



P.27 to 28  
**ST**  
series  
7.3 x 4.3 x 1.4 mm  
2 V / 330  $\mu$ F to  
2.5 V / 270  $\mu$ F  
ESR:6 m $\Omega$

P.27 to 28  
**SS**  
series  
7.3 x 4.3 x 1.1 mm  
2 V / 220  $\mu$ F to  
2.5 V / 180  $\mu$ F  
ESR:6 m $\Omega$

P.27 to 28  
**SR**  
series  
7.3 x 4.3 x 1.0 mm (max.)  
2 V / 220  $\mu$ F to  
6.3 V / 68  $\mu$ F  
ESR:4.5 m $\Omega$  to 9 m $\Omega$

## 3 terminals

### Low ESR / Low ESL\*

P.25  
**GX-L**  
series  
7.3 x 4.3 x 1.9 mm  
2 V / 560  $\mu$ F to  
2.5 V / 470  $\mu$ F  
ESR:3 m $\Omega$



P.26  
**LX**  
series  
7.3 x 4.3 x 1.9mm  
2 V / 560  $\mu$ F to  
2.5 V / 470  $\mu$ F  
ESR:4.5 m $\Omega$  / 6 m $\Omega$



P.27 to 28  
**LT**  
series  
7.3 x 4.3 x 1.4 mm  
2 V / 330  $\mu$ F to  
2.5 V / 270  $\mu$ F  
ESR:6 m $\Omega$

P.27 to 28  
**LS**  
series  
7.3 x 4.3 x 1.1 mm  
2 V / 220  $\mu$ F to  
2.5 V / 180  $\mu$ F  
ESR:6 m $\Omega$

P.27 to 28  
**LR**  
series  
7.3 x 4.3 x 1.0mm (max.)  
2 V / 220  $\mu$ F to  
6.3 V / 68  $\mu$ F  
ESR:4.5 m $\Omega$  to 9 m $\Omega$

※: ESL:0.5 nH (Typ.)

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
**Line-up**  
Series system diagram

Products list  
CS/CT/CX  
SX  
GX/GX-L  
LX  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

# Products list

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

**Products list**

CS/CT/CX  
SX  
GX/GX-L  
LX  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Surface mount type

Catalog EOL models

## Series • ESR Matrix list

Series (ESR mΩ)

V	μF	10	15	22	33	47	56	68	82	100	120
2.0											
2.5											
4.0									SX(9)	SX(9)	CS(15)
											SR(9)
											LR(9)
6.3								CS(15)		CT(15)	CX(15)
								SR(9)		CX(15)	SX(7)
								LR(9)			
10						CS(40)		CT(40)		CX(40)	
						CX(40)		CX(40)		HX(40)	
						HX(40)		HX(40)			
16		CS(40)	CS(40)	CS(40)	CT(40)			CX(40)			
		CX(40)	CX(40)	CX(40)	CX(40)			HX(40)			
		HX(40)	HX(40)	HX(40)	HX(40)						
20	CS(40)	CS(40)	CS(40)	CT(40)	CT(40)	CX(40)					
			CX(40)	CX(40)	CX(40)	HX(40)					
			HX(40)	HX(40)	HX(40)						
25	CS(40)	CS(40)	CT(40)	CX(40)							
		CX(40)	CX(40)	HX(40)							
		HX(40)	HX(40)								
35	CS(40)	CT(40)	CX(40)								
		CX(40)									

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up

Series system diagram

Products list

CS/CT/CX

SX

GX/GX-L

LX

SR/LR/SS/LS/ST/LT

GY

CY/SY

HX

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

V	μF	150	180	220	270	330	390	470	560	680	820
2.0			SX(9)	CX(15)	CX(12)	CX(15/12)	CX(15)	CX(15)	CX(15)		GY(3)
				SX(9)	SX(9/6/4.5)	SX(9/6/4.5)	SX(9/6/4.5)	SX(9/6/4.5)	SX(4.5)		
				SR(6/4.5)		GX(3)		GX(3)	GX(3)		
				LR(6/4.5)		LX(6/4.5)		GX-L(3)	GX-L(3)		
				SS(6)		ST(6)		LX(6/4.5)	LX(6/4.5)		
				LS(6)		LT(6)		HX(15/9/6/4.5)	HX(15/4.5)		
2.5		SX(9)	SX(9)	CX(15)	SX(7)	CX(15)	CX(15)	CX(15)			GY(3)
			SR(6/4.5)	SX(9/7)	ST(6)	SX(9/6/4.5)	SX(9/6/4.5)	SX(9/6/4.5)			
			LR(6/4.5)		LT(6)	GX(3)		GX(3)			
			SS(6)			LX(6/4.5)		GX-L(3)			
			LS(6)			HX(15/9/6/4.5)		LX(6/4.5)			
								HX(15/9/6/4.5)			
4.0		CX(15)	CT(15)	CX(15/12)	CX(15)	CX(15)		CY(15)			
		SX(9/7)	CX(15/12)	SX(9)	SX(9)	SX(9/6)		SY(9)			
			SX(9)								
6.3		CX(15/12)	CX(15)	CX(15)		CY(15)					
		SX(9)	SX(9)	SX(9)		SY(9)					
10											
16											
20											
25											
35											



High ripple current (5600 mA rms max.)

Low profile (Height 1.1 mm)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

CS/CT/CX	Surface mount type
SX	
GX/GX-L	
LX	
SR/LR/SS/LS/ST/LT	
GY	
CY/SY	
HX	

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications


Selection guide

Items	Specifications			
	CS	CT	CX	
Series	CS	CT	CX	
Category temperature range	-55 °C to 105 °C			
Rated voltage range	4 V to 35 V		2 V to 35 V	
Rated capacitance range	10 μF to 120 μF	15 μF to 180 μF	15 μF to 560 μF	
Capacitance tolerance	±20 % (120 Hz/20 °C)			
Leakage current	I ≤ 0.1 CV(μA) [2 V to 6.3 V, 2 minutes], I ≤ 0.3 CV(μA) [10 V to 35 V, 2 minutes]			
Dissipation factor(tan δ)	≤ 0.06 (120 Hz/20 °C)			
Surge voltage(V)	Rated voltage × 1.25 [2 V to 16 V], × 1.15 [20 V to 35 V] (15 °C to 35 °C)			
Endurance	+105°C, 2000 h, rated voltage applied			
	Capacitance change	Within ±20% of the initial value		
	tan δ	≤ 2 times of the initial limit		
	DC leakage current	≤ 3 times of the initial limit [2 V to 6.3 V], ≤ Within the initial limit [10 V to 35 V]		
Damp heat (Steady state)	+60°C, 90%, 500h, No-applied voltage			
	Capacitance change of initial measur value	2 V to 2.5 V +70 %, -20 %	4 V, 10 V to 35 V +60 %, -20 %	6.3 V +50 %, -20 %
	tan δ	≤ 2 times of the initial limit		
	DC leakage current	Within the initial limit [2 V to 6.3 V], ≤ 3 times of the initial limit [10 V to 35 V]		

Surface mount type


## Marking and dimensions

R. capacitance (μF) Polarity bar (Positive)



Lot.No. R. voltage code

Rated voltage(V)	2	2.5	4	6.3	10
Code	d	e	g	j	A
Rated voltage(V)	16	20	25	35	
Code	C	D	E	V	

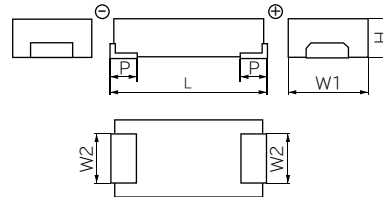

(Unit : mm)

Series	L ±0.2	W1 ±0.2	W2 ±0.1	H ±0.1	P ±0.3
CS	7.3	4.3	2.4	1.1	1.3
CT	7.3	4.3	2.4	1.4	1.3
CX	7.3	4.3	2.4	1.9	1.3

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Characteristics list (2 to 6.3 V)

Series	Rated voltage (V)	Capacitance (μF)	Case size (mm)			Specifications		Part number	Min. Packaging Q' ty ※3 (pcs)
			L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)		
CS	4	120	7.3	4.3	1.1	5100	15	EEFCS0G121R	3500
	6.3	68	7.3	4.3	1.1	5100	15	EEFCS0J680R	3500
CT	4	180	7.3	4.3	1.4	5100	15	EEFCT0G181R	3500
	6.3	100	7.3	4.3	1.4	5100	15	EEFCT0J101R	3500
CX	2	220	7.3	4.3	1.9	5100	15	EEFCX0D221R	3500
		270	7.3	4.3	1.9	5600	12	EEFCX0D271XR	3500
		330	7.3	4.3	1.9	5100	15	EEFCX0D331R	3500
			7.3	4.3	1.9	5600	12	EEFCX0D331XR	3500
		390	7.3	4.3	1.9	5100	15	EEFCX0D391R	3500
		470	7.3	4.3	1.9	5100	15	EEFCX0D471R	3500
		560	7.3	4.3	1.9	5100	15	EEFCX0D561R	3500
		2.5	220	7.3	4.3	1.9	5100	15	EEFCX0E221R
	330		7.3	4.3	1.9	5100	15	EEFCX0E331R	3500
	390		7.3	4.3	1.9	5100	15	EEFCX0E391R	3500
	470		7.3	4.3	1.9	5100	15	EEFCX0E471R	3500
	4	150	7.3	4.3	1.9	5100	15	EEFCX0G151R	3500
		180	7.3	4.3	1.9	5100	15	EEFCX0G181R	3500
			7.3	4.3	1.9	5600	12	EEFCX0G181XR	3500
		220	7.3	4.3	1.9	5100	15	EEFCX0G221R	3500
			7.3	4.3	1.9	5600	12	EEFCX0G221XR	3500
		270	7.3	4.3	1.9	5100	15	EEFCX0G271R	3500
		330	7.3	4.3	1.9	5100	15	EEFCX0G331R	3500
		6.3	100	7.3	4.3	1.9	5100	15	EEFCX0J101R
	120		7.3	4.3	1.9	5100	15	EEFCX0J121R	3500
	150		7.3	4.3	1.9	5100	15	EEFCX0J151R	3500
			7.3	4.3	1.9	5600	12	EEFCX0J151XR	3500
	180		7.3	4.3	1.9	5100	15	EEFCX0J181R	3500
	220		7.3	4.3	1.9	5100	15	EEFCX0J221R	3500

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

● Characteristics list (10 to 35 V) **Not Recommended for New Design**

Series	Rated voltage (V)	Capacitance (μF)	Case size (mm)			Specifications		Part number	Min. Packaging Q'ty ※3 (pcs)
			L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)		
CS	10	47	7.3	4.3	1.1	3200	40	EEFCS1A470R	3500
		15	7.3	4.3	1.1	3200	40	EEFCS1C150R	3500
		22	7.3	4.3	1.1	3200	40	EEFCS1C220R	3500
	16	33	7.3	4.3	1.1	3200	40	EEFCS1C330R	3500
		10	7.3	4.3	1.1	3200	40	EEFCS1D100R	3500
		15	7.3	4.3	1.1	3200	40	EEFCS1D150R	3500
	20	22	7.3	4.3	1.1	3200	40	EEFCS1D220R	3500
		10	7.3	4.3	1.1	3200	40	EEFCS1E100R	3500
		15	7.3	4.3	1.1	3200	40	EEFCS1E150R	3500
		35	7.3	4.3	1.1	3200	40	EEFCS1V100R	3500
CT	10	68	7.3	4.3	1.4	3200	40	EEFCT1A680R	3500
		16	47	7.3	4.3	1.4	3200	40	EEFCT1C470R
	20	33	7.3	4.3	1.4	3200	40	EEFCT1D330R	3500
		47	7.3	4.3	1.4	3200	40	EEFCT1D470R	3500
	25	22	7.3	4.3	1.4	3200	40	EEFCT1E220R	3500
	35	15	7.3	4.3	1.4	3200	40	EEFCT1V150R	3500
CX	10	47	7.3	4.3	1.9	3200	40	EEFCX1A470R	3500
		68	7.3	4.3	1.9	3200	40	EEFCX1A680R	3500
		100	7.3	4.3	1.9	3200	40	EEFCX1A101R	3500
	16	15	7.3	4.3	1.9	3200	40	EEFCX1C150R	3500
		22	7.3	4.3	1.9	3200	40	EEFCX1C220R	3500
		33	7.3	4.3	1.9	3200	40	EEFCX1C330R	3500
		47	7.3	4.3	1.9	3200	40	EEFCX1C470R	3500
		68	7.3	4.3	1.9	3200	40	EEFCX1C680R	3500
	20	22	7.3	4.3	1.9	3200	40	EEFCX1D220R	3500
		33	7.3	4.3	1.9	3200	40	EEFCX1D330R	3500
		47	7.3	4.3	1.9	3200	40	EEFCX1D470R	3500
		56	7.3	4.3	1.9	3200	40	EEFCX1D560R	3500
		15	7.3	4.3	1.9	3200	40	EEFCX1E150R	3500
	25	22	7.3	4.3	1.9	3200	40	EEFCX1E220R	3500
		33	7.3	4.3	1.9	3200	40	EEFCX1E330R	3500
		15	7.3	4.3	1.9	3200	40	EEFCX1V150R	3500
	35	22	7.3	4.3	1.9	3200	40	EEFCX1V220R	3500

- ※1: Ripple current (100 kHz/ +45 °C)
- ※2: ESR (100 kHz/+20 °C)
- ※3: Please contact us when 500 pcs packing is necessary
- ◆Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

● Temperature coefficient of Ripple current

	Temp.	T ≤ 45 °C	45 °C < T ≤ 85 °C	85 °C < T ≤ 105 °C
2 V to 6.3 V	Coefficient	1.0	0.7	0.25
10 V to 35 V		1.0	0.8	0.5

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

**SP-Cap**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up  
Series system diagram  
Products list

**CS/CT/CX**

SX  
GX/GX-L  
LX  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Catalog EOL models

**POSCAP**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
Catalog EOL models

**OS-CON**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

**Hybrid**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



- Large capacitance(560  $\mu$ F max.)
- High ripple current(8500 mA rms max.)
- Low ESR(4.5 m $\Omega$  to 9 m $\Omega$  max.)
- RoHS compliance, Halogen free

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up Selection guide

Series system diagram

Products list

CS/CT/CX

**SX**

GX/GX-L

LX

SR/LR/SS/LS/ST/LT

GY

CY/SY

HX

Surface mount type

Catalog EOL models

Items	Specifications	
Series	SX	
Category temperature range	-55 °C to 105 °C	
Rated voltage range	2 V to 6.3 V	
Rated capacitance range	82 $\mu$ F to 560 $\mu$ F	
Capacitance tolerance	$\pm 20$ % (120 Hz/20 °C)	
Leakage current	$I \leq 0.1$ CV( $\mu$ A) [2 minutes]	
Dissipation factor(tan $\delta$ )	$\leq 0.06$ (120 Hz/20 °C)	
Surge voltage(V)	Rated voltage $\times 1.25$ (15 °C to 35 °C)	
Endurance	+105 °C, 2000 h, rated voltage applied	
	Capacitance change	Within $\pm 20$ % of the initial value
	tan $\delta$	$\leq 2$ times of the initial limit
	DC leakage current	$\leq 3$ times of the initial limit
Damp heat (Steady state)	+60 °C, 90 %, 500 h, No-applied voltage	
	Capacitance change of initial measurd value	2 V to 2.5 V      4 V      6.3 V +70 %, -20 %    +60 %, -20 %    +50 %, -20 %
	tan $\delta$	$\leq 2$ times of the initial limit
	DC leakage current	Within the initial limit

POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

## ● Marking and dimensions

R. capacitance ( $\mu$ F)    Polarity bar(Positive)

Lot.No.    R. voltage code

Rated voltage(V)	2	2.5	4	6.3
Code	d	e	g	j

(Unit : mm)					
Series	L $\pm 0.2$	W1 $\pm 0.2$	W2 $\pm 0.1$	H $\pm 0.1$	P $\pm 0.3$
SX	7.3	4.3	2.4	1.9	1.3

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



## ● Characteristics list

Series	Rated voltage (V)	Capacitance (μF)	Case size (mm)			Specifications		Part number	Min. Packaging Q' ty ※3 (pcs)	
			L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)			
SX	2	180	7.3	4.3	1.9	6300	9	EEFSX0D181ER	3500	
		220	7.3	4.3	1.9	6300	9	EEFSX0D221ER	3500	
		270	7.3	4.3	1.9	6300	9	EEFSX0D271ER	3500	
			7.3	4.3	1.9	7500	6	EEFSX0D271XE	3500	
			7.3	4.3	1.9	8500	4.5	EEFSX0D271E4	3500	
		330	7.3	4.3	1.9	6300	9	EEFSX0D331ER	3500	
			7.3	4.3	1.9	7500	6	EEFSX0D331XE	3500	
			7.3	4.3	1.9	8500	4.5	EEFSX0D331E4	3500	
		390	7.3	4.3	1.9	6300	9	EEFSX0D391ER	3500	
			7.3	4.3	1.9	7500	6	EEFSX0D391XE	3500	
			7.3	4.3	1.9	8500	4.5	EEFSX0D391E4	3500	
		470	7.3	4.3	1.9	6300	9	EEFSX0D471ER	3500	
			7.3	4.3	1.9	7500	6	EEFSX0D471XE	3500	
			7.3	4.3	1.9	8500	4.5	EEFSX0D471E4	3500	
		560	7.3	4.3	1.9	8500	4.5	EEFSX0D561E4	3500	
		2.5	150	7.3	4.3	1.9	6300	9	EEFSX0E151ER	3500
			180	7.3	4.3	1.9	6300	9	EEFSX0E181ER	3500
			220	7.3	4.3	1.9	6300	9	EEFSX0E221ER	3500
	7.3			4.3	1.9	7000	7	EEFSX0E221E7	3500	
	270		7.3	4.3	1.9	7000	7	EEFSX0E271E7	3500	
	330		7.3	4.3	1.9	6300	9	EEFSX0E331ER	3500	
			7.3	4.3	1.9	7500	6	EEFSX0E331XE	3500	
			7.3	4.3	1.9	8500	4.5	EEFSX0E331E4	3500	
	390		7.3	4.3	1.9	6300	9	EEFSX0E391ER	3500	
			7.3	4.3	1.9	7500	6	EEFSX0E391XE	3500	
			7.3	4.3	1.9	8500	4.5	EEFSX0E391E4	3500	
	470		7.3	4.3	1.9	6300	9	EEFSX0E471ER	3500	
			7.3	4.3	1.9	7500	6	EEFSX0E471XE	3500	
			7.3	4.3	1.9	8500	4.5	EEFSX0E471E4	3500	
	4		82	7.3	4.3	1.9	6300	9	EEFSX0G820ER	3500
			100	7.3	4.3	1.9	6300	9	EEFSX0G101ER	3500
			150	7.3	4.3	1.9	6300	9	EEFSX0G151ER	3500
				7.3	4.3	1.9	7000	7	EEFSX0G151E7	3500
		180	7.3	4.3	1.9	6300	9	EEFSX0G181ER	3500	
		220	7.3	4.3	1.9	6300	9	EEFSX0G221ER	3500	
		270	7.3	4.3	1.9	6300	9	EEFSX0G271ER	3500	
330		7.3	4.3	1.9	6300	9	EEFSX0G331ER	3500		
		7.3	4.3	1.9	7500	6	EEFSX0G331XE	3500		
6.3		120	7.3	4.3	1.9	7000	7	EEFSX0J121E7	3500	
	150	7.3	4.3	1.9	6300	9	EEFSX0J151ER	3500		
	180	7.3	4.3	1.9	6300	9	EEFSX0J181ER	3500		
	220	7.3	4.3	1.9	6300	9	EEFSX0J221ER	3500		

※1: Ripple current (100 kHz/ +45 °C)

※2: ESR (100 kHz/+20 °C)

※3: Please contact us when 500 pcs packing is necessary

◆Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

## ● Temperature coefficient of Ripple current

Temp.	T ≤ 45 °C	45 °C < T ≤ 85 °C	85 °C < T ≤ 105 °C
Coefficient	1.0	0.7	0.25

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

CS/CT/CX  
**SX**  
GX/GX-L  
LX  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Large capacitance (560  $\mu$ F max.)

Low ESL (3 terminals : 50% less than 2-terminals) [Suffix : L]

Super low ESR (3 m $\Omega$  max.)

High ripple current (10200 mA rms max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

CS/CT/CX  
SX  
**GX/GX-L**  
LX  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications	
Series	GX	
Category temperature range	-55 °C to 105 °C	
Rated voltage range	2 V to 2.5 V	
Rated capacitance range	330 $\mu$ F to 560 $\mu$ F	
Capacitance tolerance	$\pm 20\%$ (120 Hz/+20 °C)	
Leakage current	$I \leq 0.1 CV(\mu A)$ [2 minutes]	
Dissipation factor (tan $\delta$ )	$\leq 0.06$ (120 Hz/+20 °C)	
Surge voltage (V)	Rated voltage $\times 1.25$ (15 °C to 35 °C)	
Endurance	+105 °C, 2000 h, rated voltage applied	
	Capacitance change	Within $\pm 20\%$ of the initial value
	tan $\delta$	$\leq 2$ times of the initial limit
	DC leakage current	$\leq 3$ times of the initial limit
Damp heat (Steady state)	+60 °C, 90 %, 500 h, No-applied voltage	
	Capacitance change of initial measurd value	2 V to 2.5 V +70 %, -20 %
	tan $\delta$	$\leq 2$ times of the initial limit
	DC leakage current	Within the initial limit

Surface mount type

## Marking and dimensions

R. capacitance ( $\mu$ F)    Polarity bar (Positive)

Rated voltage (V)	2	2.5
Code	d	e

Lot.No.    R. voltage code

2 terminals

3 terminals

(Unit : mm)

Series	L $\pm 0.2$	W1 $\pm 0.2$	W2 $\pm 0.1$	H $\pm 0.1$	P $\pm 0.3$
GX	7.3	4.3	2.4	1.9	1.3

Series	L $\pm 0.2$	W1 $\pm 0.2$	W2 $\pm 0.1$	H $\pm 0.1$	P1 $\pm 0.3$	P2 $\pm 0.1$	P3 $\pm 0.2$	P4 $\pm 0.2$
GX-L	7.3	4.3	2.4	1.9	1.3	1.1	0.7	1.4

## Characteristics list

Series	Rated voltage (V)	Capacitance ( $\mu$ F)	Case size (mm)			Specifications		The number of terminals		Part number	Min. Packaging Q'ty $\times 3$ (pcs)
			L	W	H	Ripple current $\times 1$ (mA rms)	ESR $\times 2$ (m $\Omega$ max.)	2	3		
GX	2	330	7.3	4.3	1.9	10200	3	○		EEFGX0D331R	3500
			7.3	4.3	1.9	10200	3	○		EEFGX0D471R	3500
			7.3	4.3	1.9	10200	3		○	EEFGX0D471L	3500
	2.5	560	7.3	4.3	1.9	10200	3	○		EEFGX0D561R	3500
			7.3	4.3	1.9	10200	3		○	EEFGX0D561L	3500
			7.3	4.3	1.9	10200	3	○		EEFGX0E331R	3500
		470	7.3	4.3	1.9	10200	3	○	EEFGX0E471R	3500	
			7.3	4.3	1.9	10200	3		○	EEFGX0E471L	3500

$\times 1$ : Ripple current (100 kHz/ +45 °C)  $\times 2$ : ESR (100 kHz/+20 °C)  $\times 3$ : Please contact us when 500 pcs packing is necessary

◆ Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

## Temperature coefficient of Ripple current

Temp.	$T \leq 45$ °C	$45$ °C < $T \leq 85$ °C	$85$ °C < $T \leq 105$ °C
Coefficient	1.0	0.7	0.25

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



Large capacitance (560  $\mu$ F max.)

Low ESL (3 terminals : 50% less than 2-terminals)

Super low ESR (4.5 m $\Omega$ , 6 m $\Omega$  max.)

High ripple current (8500 mA rms max.)

RoHS compliance, Halogen free

## Specifications

Items	Specifications	
Series	LX	
Category temperature range	-55 °C to 105 °C	
Rated voltage range	2 V to 2.5 V	
Rated capacitance range	330 $\mu$ F to 560 $\mu$ F	
Capacitance tolerance	$\pm 20$ % (120 Hz/+20 °C)	
Leakage current	$I \leq 0.1$ CV ( $\mu$ A) [2 minutes]	
Dissipation factor (tan $\delta$ )	$\leq 0.06$ (120 Hz/+20 °C)	
Surge voltage (V)	Rated voltage $\times 1.25$ (15 °C to 35 °C)	
Endurance	+105 °C, 2000 h, rated voltage applied	
	Capacitance change	Within $\pm 20$ % of the initial value
	tan $\delta$	$\leq 2$ times of the initial limit
	DC leakage current	$\leq 3$ times of the initial limit
Damp heat (Steady state)	+60 °C, 90 %, 500 h, No-applied voltage	
	Capacitance change of initial measurd value	2 V to 2.5 V +70 %, -20 %
	tan $\delta$	$\leq 2$ times of the initial limit
	DC leakage current	Within the initial limit

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up  
Series system diagram  
Products list

Surface mount type

CS/CT/CX  
SX  
GX/GX-L  
**LX**  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Marking and dimensions

R. capacitance ( $\mu$ F)    Polarity bar (Positive)

Lot.No.    R. voltage code

Rated voltage (V)	2	2.5
Code	d	e

(Unit : mm)

Series	L $\pm 0.2$	W1 $\pm 0.2$	W2 $\pm 0.1$	H $\pm 0.1$	P1 $\pm 0.3$	P2 $\pm 0.1$	P3 $\pm 0.2$	P4 $\pm 0.2$
LX	7.3	4.3	2.4	1.9	1.3	1.1	0.7	1.4

Surface mount type

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Characteristics list

Series	Rated voltage (V)	Capacitance ( $\mu$ F)	Case size (mm)			Specifications		Part number	Min. Packaging Q <sup>1</sup> ty $\times$ 3 (pcs)
			L	W	H	Ripple current $\times$ 1 (mA rms)	ESR $\times$ 2 (m $\Omega$ max.)		
LX	2	330	7.3	4.3	1.9	7500	6	EEFLX0D331R	3500
			7.3	4.3	1.9	8500	4.5	EEFLX0D331R4	3500
		470	7.3	4.3	1.9	7500	6	EEFLX0D471R	3500
			7.3	4.3	1.9	8500	4.5	EEFLX0D471R4	3500
	560	7.3	4.3	4.3	1.9	7500	6	EEFLX0D561R	3500
		330	7.3	4.3	1.9	7500	6	EEFLX0E331R	3500
			7.3	4.3	1.9	8500	4.5	EEFLX0E331R4	3500
470	7.3	4.3	4.3	1.9	7500	6	EEFLX0E471R	3500	
									7.3

$\times$ 1: Ripple current (100 kHz/ +45 °C)  $\times$ 2: ESR (100 kHz/+20 °C)  $\times$ 3: Please contact us when 500 pcs packing is necessary  
 $\blacklozenge$  Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

## Temperature coefficient of Ripple current

Temp.	$T \leq 45$ °C	$45$ °C $< T \leq 85$ °C	$85$ °C $< T \leq 105$ °C
Coefficient	1.0	0.7	0.25

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Low profile (Height 1.0 mm max.)

Low ESL (3 terminals): 50% less than 2-terminals (LR, LS, LT series)

Super low ESR (4.5 mΩ to 9 mΩ)

High ripple current (8500 mA rms max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions Mounting specifications Packing specifications	Selection guide
Line-up	
Series system diagram	Surface mount type
Products list	
CS/CT/CX	
SX	
GX/GX-L	
LX	
SR/LR/SS/LS/ST/LT	
GY	
CY/SY	
HX	
Catalog EOL models	

Items	Specifications						
	SR	LR	SS	LS	ST	LT	
Category temperature range	-55 °C to 105 °C						
Rated voltage range	2 V to 6.3 V		2 V to 2.5 V				
Rated capacitance range	68 μF to 220 μF		180 μF to 220 μF		270 μF to 330 μF		
Capacitance tolerance	±20 % (120 Hz/+20 °C)						
Leakage current	$I \leq 0.1 CV(\mu A)$ [2 minutes]						
Dissipation factor(tan δ)	$\leq 0.06$ (120 Hz/+20 °C)						
Surge voltage(V)	Rated voltage × 1.25 (15 °C to 35 °C)						
Endurance	+105 °C, 2000 h, rated voltage applied						
	Capacitance change	Within ±20 % of the initial value					
	tan δ	$\leq 2$ times of the initial limit					
	DC leakage current	$\leq 3$ times of the initial limit					
Damp heat (Steady state)	+60 °C, 90 %, 500 h, No-applied voltage						
	Capacitance change of initial measurd value	2 V to 2.5 V		4 V		6.3 V	
		+70 %, -20 %		+60 %, -20 %		+50 %, -20 %	
	tan δ	$\leq 2$ times of the initial limit					
	DC leakage current	Within the initial limit					

Surface mount type

## Marking and dimensions


Catalog Deletion models  
Catalog EOL models

## OS-CON


Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

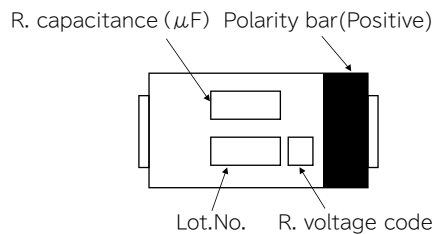

### 2 terminals

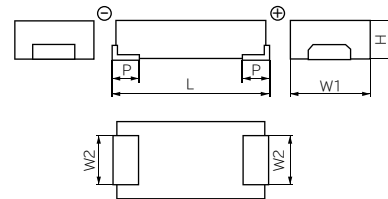


(Unit : mm)

Series	L ±0.2	W1 ±0.2	W2 ±0.1	H ±0.1	p ±0.3
SR	7.3	4.3	2.4	1.0 <sup>※1</sup>	1.3
SS	7.3	4.3	2.4	1.1	1.3
ST	7.3	4.3	2.4	1.4	1.3

※1 Maximum

Radial lead type

### 3 terminals

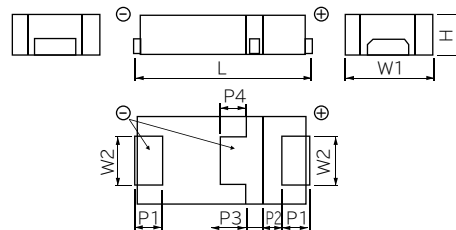

(Unit : mm)

Rated voltage(V)	2	2.5	4	6.3
Code	d	e	g	j

Series	L ±0.2	W1 ±0.2	W2 ±0.1	H ±0.1	p1 ±0.3	p2 ±0.1	p3 ±0.2	p4 ±0.2
LR	7.3	4.3	2.4	1.0 <sup>※1</sup>	1.3	1.1	0.7	1.4
LS	7.3	4.3	2.4	1.1	1.3	1.1	0.7	1.4
LT	7.3	4.3	2.4	1.4	1.3	1.1	0.7	1.4

※1 Maximum

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Capacitance (μF)	Case size (mm)			Specifications		The number of terminals		Part number	Min. Packaging Q'ty ※3 (pcs)
			L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	2	3		
SR	2	220	7.3	4.3	1.0 max.	7500	6	○		EEFSR0D221R	3500
			7.3	4.3	1.0 max.	8500	4.5	○		EEFSR0D221R4	3500
	2.5	180	7.3	4.3	1.0 max.	7500	6	○		EEFSR0E181R	3500
			7.3	4.3	1.0 max.	8500	4.5	○		EEFSR0E181R4	3500
	4	120	7.3	4.3	1.0 max.	6300	9	○		EEFSR0G121R	3500
6.3	68	7.3	4.3	1.0 max.	6300	9	○		EEFSR0J680R	3500	
LR	2	220	7.3	4.3	1.0 max.	7500	6		○	EEFLR0D221R	3500
			7.3	4.3	1.0 max.	8500	4.5		○	EEFLR0D221R4	3500
	2.5	180	7.3	4.3	1.0 max.	7500	6		○	EEFLR0E181R	3500
			7.3	4.3	1.0 max.	8500	4.5		○	EEFLR0E181R4	3500
	4	120	7.3	4.3	1.0 max.	6300	9		○	EEFLR0G121R	3500
6.3	68	7.3	4.3	1.0 max.	6300	9		○	EEFLR0J680R	3500	
SS	2	220	7.3	4.3	1.1	7500	6	○		EEFSS0D221R	3500
	2.5	180	7.3	4.3	1.1	7500	6	○		EEFSS0E181R	3500
LS	2	220	7.3	4.3	1.1	7500	6		○	EEFLS0D221R	3500
	2.5	180	7.3	4.3	1.1	7500	6		○	EEFLS0E181R	3500
ST	2	330	7.3	4.3	1.4	7500	6	○		EEFST0D331R	3500
	2.5	270	7.3	4.3	1.4	7500	6	○		EEFST0E271R	3500
LT	2	330	7.3	4.3	1.4	7500	6		○	EEFLT0D331R	3500
	2.5	270	7.3	4.3	1.4	7500	6		○	EEFLT0E271R	3500

※1: Ripple current (100 kHz/ +45 °C )

※2: ESR (100 kHz/+20 °C)

※3: Please contact us when 500 pcs packing is necessary

◆Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

## ● Temperature coefficient of Ripple current

Temp.	T ≤ 45 °C	45 °C < T ≤ 85 °C	85 °C < T ≤ 105 °C
Coefficient	1.0	0.7	0.25

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up

Series system diagram

Products list

CS/CT/CX

SX

GX/GX-L

LX

SR/LR/SS/LS/ST/LT

GY

CY/SY

HX

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type





Super low ESR (3 mΩ max.)

High ripple current (10200 mA rms max.)

Large capacitance (820 μF max.)

RoHS compliance, Halogen free

**SP-Cap**

**Specifications**

- Guidelines and Precautions  
Mounting specifications  
Packing specifications
- Line-up**
- Series system diagram
- Products list
- CS/CT/CX
- SX
- GX/GX-L
- LX
- SR/LR/SS/LS/ST/LT
- GY**
- CY/SY
- HX
- Surface mount type
- Catalog EOL models

Items	Specifications	
Series	GY	
Category temperature range	-55 °C to 105 °C	
Rated voltage range	2 V to 2.5 V	
Rated capacitance range	680 μF to 820 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	$I \leq 0.1 CV (\mu A)$ [2 minutes]	
Dissipation factor (tan δ)	$\leq 0.06$ (120 Hz/+20 °C)	
Surge voltage (V)	Rated voltage × 1.25 (15 °C to 35 °C)	
Endurance	+105 °C, 2000 h, rated voltage applied	
	Capacitance change	Within ±20 % of the initial value
	tan δ	$\leq 2$ times of the initial limit
	DC leakage current	$\leq 3$ times of the initial limit
Damp heat (Steady state)	+60 °C, 90 %, 500 h, No-applied voltage	
	Capacitance change of initial measurd value	2 V to 2.5 V +70 %, -20 %
	tan δ	$\leq 2$ times of the initial limit
	DC leakage current	Within the initial limit

- POSCAP**
- Guidelines and Precautions  
Mounting specifications  
Packing specifications
- Selection guide

Surface mount type

**Marking and dimensions**

R. capacitance (μF)    Polarity bar (Positive)

Lot.No.    R. voltage code

Rated voltage (V)	2	2.5
Code	d	e

(Unit : mm)

Series	L ±0.2	W1 ±0.2	W2 ±0.1	H ±0.2	P ±0.3
GY	7.3	4.3	2.4	2.8	1.3

※Externals of figure are the reference.

- Catalog Deletion models
- Catalog EOL models
- OS-CON**
- Guidelines and Precautions  
Mounting specifications  
Packing specifications
- Selection guide

Surface mount type

**Characteristics list**

Series	Rated voltage (V)	Capacitance (μF)	Case size (mm)			Specifications		Part number	Min. Packaging Q'ty (pcs)
			L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)		
GY	2	820	7.3	4.3	2.8	10200	3	EEFGY0D821R	2000
	2.5	680	7.3	4.3	2.8	10200	3	EEFGY0E681R	2000

※1: Ripple current (100 kHz/ +45°C )

※2: ESR (100 kHz/+20 °C)

◆Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

Catalog EOL models

**Hybrid**

- Guidelines and Precautions  
Mounting specifications  
Packing specifications
- Selection guide

Surface mount type

**Temperature coefficient of Ripple current**

Temp.	$T \leq 45 \text{ } ^\circ\text{C}$	$45 \text{ } ^\circ\text{C} < T \leq 85 \text{ } ^\circ\text{C}$	$85 \text{ } ^\circ\text{C} < T \leq 105 \text{ } ^\circ\text{C}$
Coefficient	1.0	0.7	0.25

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Radial lead type



Endurance 85 °C 2000 h

High ripple current (5100 mA rms to 6300 mA rms max.)

Product height(3.0 mm max.)

RoHS compliance, Halogen free

## Specifications

Items	Specifications	
Series	CY, SY	
Category temperature range	-55 °C to 85 °C	
Rated voltage range	4 V, 6.3 V	
Rated capacitance range	330 μF to 470 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	$I \leq 0.1 CV(\mu A)$ [2 minutes]	
Dissipation factor(tan δ)	$\leq 0.06$ (120 Hz/+20 °C)	
Surge voltage(V.)	Rated voltage × 1.25 (15 °C to 35 °C)	
Endurance	+85 °C, 2000 h, rated voltage applied	
	Capacitance change	Within ±20 % of the initial value
	tan δ	$\leq 2$ times of the initial limit
	DC leakage current	$\leq 3$ times of the initial limit
Damp heat (Steady state)	+60 °C, 90 %, 500 h, No-applied voltage	
	Capacitance change of initial measurd value	4 V: +60 %, -20 % 6.3 V: +50 %, -20 %
	tan δ	$\leq 2$ times of the initial limit
	DC leakage current	Within the initial limit

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up

Series system diagram

Products list

CS/CT/CX  
SX  
GX/GX-L  
LX  
SR/LR/SS/LS/ST/LT  
GY  
**CY/SY**  
HX

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

## Marking and dimensions

R. capacitance (μF)    Polarity bar(Positive)

Lot.No.    R. voltage code

Rated voltage(V)	4	6.3
Code	g	j

(Unit : mm)

Series	L ±0.2	W1 ±0.2	W2 ±0.1	H ±0.2	P ±0.3
CY/SY	7.3	4.3	2.4	2.8	1.3

※Externals of figure are the reference.

## Characteristics list

Series	Rated voltage (V)	Capacitance (μF)	Case size (mm)			Specifications		Part number	Min. Packaging Q' ty ※3 (pcs)
			L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)		
CY	4	470	7.3	4.3	2.8	5100	15	ECGCY0G471R	2000
	6.3	330	7.3	4.3	2.8	5100	15	ECGCY0J331R	2000
SY	4	470	7.3	4.3	2.8	6300	9	ECGSY0G471R	2000
	6.3	330	7.3	4.3	2.8	6300	9	ECGSY0J331R	2000

※1: Ripple current (100 kHz/ +45 °C)

※2: ESR (100 kHz/+20 °C)

※3: Please contact us when 500 pcs packing is necessary.

◆Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Temperature coefficient of Ripple current

Temp.	T ≤ 45 °C	45 °C < T ≤ 65 °C	65 °C < T ≤ 85 °C
Coefficient	1.0	0.7	0.25

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



## SP-Cap

## ● Specifications

Guidelines and Precautions Mounting specifications Packing specifications	Selection guide
Line-up	
Series system diagram	Surface mount type
Products list	
CS/CT/CX	
SX	
GX/GX-L	
LX	
SR/LR/SS/LS/ST/LT	
GY	
CY/SY	
<b>HX</b>	
Catalog EOL models	

Items	Specifications		
Series	HX		
Category temperature range	-55 °C to 125 °C		
Rated voltage range	2 V to 2.5 V, 10 V to 25 V		
Category voltage range	1.6 V to 2 V, 8 V to 20 V		
Rated capacitance range	15 μF to 560 μF		
Capacitance tolerance	±20 % (120 Hz/20 °C)		
Leakage current	I ≤ 0.1 CV(μA) [2 V, 2.5 V, 2 minutes], I ≤ 0.3 CV(μA) [10 V to 25 V, 2 minutes]		
Dissipation factor(tan δ)	≤ 0.1 (120 Hz/20 °C)		
Surge voltage(V)	Rated voltage × 1.25 [2 V to 16 V], × 1.15 [20 V to 25 V] (15 °C to 35 °C)		
Endurance	+125 °C, 1000 h, Category voltage applied		
	Capacitance change	Within ±20 % of the initial value	
	tan δ	≤ 2 times of the initial limit	
	DC leakage current	Within the initial limit	
Damp heat (Steady state)	+60 °C, 90 %, 500 h, No-applied voltage		
	Capacitance change of initial measur value	2 V to 2.5 V	10 V to 25 V
		+70 %, -20 %	+60 %, -20 %
	tan δ	≤ 2 times of the initial limit	
	DC leakage current	Within the initial limit [2 V, 2.5 V], ≤ 300 % of the initial limit [10 V to 25 V]	

## POSCAP

Guidelines and Precautions Mounting specifications Packing specifications
Selection guide

Surface mount type



## ● Marking and dimensions

Catalog Deletion models
Catalog EOL models

## OS-CON

Guidelines and Precautions Mounting specifications Packing specifications
Selection guide

Surface mount type

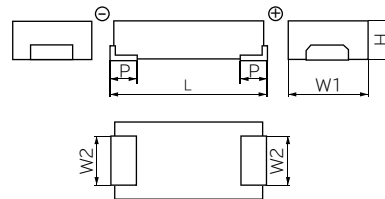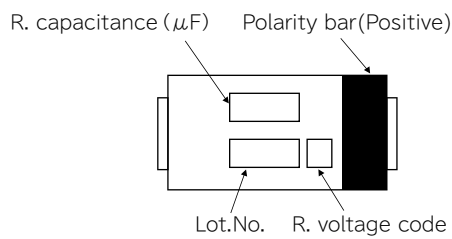

(Unit : mm)

Rated voltage(V)	2	2.5	10	16	20	25
Code	d	e	A	C	D	E

Series	L ±0.2	W1 ±0.2	W2 ±0.1	H ±0.1	P ±0.3
HX	7.3	4.3	2.4	1.9	1.3

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions Mounting specifications Packing specifications
Selection guide

Surface mount type

Radial lead type

## ● Characteristics list (2 to 2.5 V)

Series	Rated voltage [105 °C] (V)	Category voltage [125 °C] (V)	Capacitance ( $\mu$ F)	Case size (mm)			Specifications		Part number	Min. Packaging Q'ty ※3 (pcs)
				L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (m $\Omega$ max.)		
HX	2	1.6	470	7.3	4.3	1.9	5100	15	EEFHX0D471R	3500
				7.3	4.3	1.9	6300	9	EEFHX0D471R9	3500
				7.3	4.3	1.9	7500	6	EEFHX0D471R6	3500
				7.3	4.3	1.9	8500	4.5	EEFHX0D471R4	3500
			560	7.3	4.3	1.9	5100	15	EEFHX0D561R	3500
				7.3	4.3	1.9	8500	4.5	EEFHX0D561R4	3500
	2.5	2	330	7.3	4.3	1.9	5100	15	EEFHX0E331R	3500
				7.3	4.3	1.9	6300	9	EEFHX0E331R9	3500
				7.3	4.3	1.9	7500	6	EEFHX0E331R6	3500
				7.3	4.3	1.9	8500	4.5	EEFHX0E331R4	3500
			470	7.3	4.3	1.9	5100	15	EEFHX0E471R	3500
				7.3	4.3	1.9	6300	9	EEFHX0E471R9	3500
				7.3	4.3	1.9	7500	6	EEFHX0E471R6	3500
				7.3	4.3	1.9	8500	4.5	EEFHX0E471R4	3500

### SP-Cap

Guidelines and Precautions	Mounting specifications	Packing specifications
Selection guide	Line-up	Series system diagram
	Products list	
	CS/CT/CX	
	SX	
	GX/GX-L	
	LX	
	SR/LR/SS/LS/ST/LT	
	GY	
	CY/SY	
	<b>HX</b>	
Catalog EOL models		

### POSCAP

Guidelines and Precautions	Mounting specifications	Packing specifications
Selection guide		

Surface mount type

## ● Characteristics list (10 to 25 V) **Not Recommended for New Design**

Series	Rated voltage [105 °C] (V)	Category voltage [125 °C] (V)	Capacitance ( $\mu$ F)	Case size (mm)			Specifications		Part number	Min. Packaging Q'ty ※3 (pcs)
				L	W	H	Ripple current ※1 (mA rms)	ESR ※2 (m $\Omega$ max.)		
HX	10	8	47	7.3	4.3	1.9	3200	40	EEFHX1A470R	3500
			68	7.3	4.3	1.9	3200	40	EEFHX1A680R	3500
			100	7.3	4.3	1.9	3200	40	EEFHX1A101R	3500
	16	12.8	15	7.3	4.3	1.9	3200	40	EEFHX1C150R	3500
			22	7.3	4.3	1.9	3200	40	EEFHX1C220R	3500
			33	7.3	4.3	1.9	3200	40	EEFHX1C330R	3500
			47	7.3	4.3	1.9	3200	40	EEFHX1C470R	3500
			68	7.3	4.3	1.9	3200	40	EEFHX1C680R	3500
	20	16	22	7.3	4.3	1.9	3200	40	EEFHX1D220R	3500
			33	7.3	4.3	1.9	3200	40	EEFHX1D330R	3500
			47	7.3	4.3	1.9	3200	40	EEFHX1D470R	3500
			56	7.3	4.3	1.9	3200	40	EEFHX1D560R	3500
	25	20	15	7.3	4.3	1.9	3200	40	EEFHX1E150R	3500
			22	7.3	4.3	1.9	3200	40	EEFHX1E220R	3500
			33	7.3	4.3	1.9	3200	40	EEFHX1E330R	3500

※1: Ripple current (100 kHz/ +45 °C)

※2: ESR (100 kHz/+20 °C)

※3: Please contact us when 500 pcs packing is necessary

◆Please refer to the P16 in this catalog for "Reflow conditions" and "Taping specifications".

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions	Mounting specifications	Packing specifications
Selection guide		

Surface mount type

Radial lead type

Catalog EOL models

## ● Temperature coefficient of Ripple current

	Temp.	$T \leq 45 \text{ }^\circ\text{C}$	$45 \text{ }^\circ\text{C} < T \leq 85 \text{ }^\circ\text{C}$	$85 \text{ }^\circ\text{C} < T \leq 105 \text{ }^\circ\text{C}$	$105 \text{ }^\circ\text{C} < T \leq 125 \text{ }^\circ\text{C}$
2 V to 2.5 V	Coefficient	1.0	0.7	0.25	0.25
10 V to 25 V		1.0	0.8	0.5	0.25

Ripple current should be controlled so that surface temperature of capacitor does not exceed the category temperature.

Selection guide

Surface mount type

Radial lead type

# Catalog EOL Models

## SP-Cap

Guidelines and Precautions  
Mountings specifications  
Packing specifications

Line-up

Series system diagram

Products list

CS/CT/CX  
SX  
GX/GX-L  
LX  
SR/LR/SS/LS/ST/LT  
GY  
CY/SY  
HX

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mountings specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mountings specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mountings specifications  
Packing specifications

Selection guide

Surface mount type


Radial lead type

The following table is a list of the End-Of-Life (EOL) models. Sales of these items will end as soon as we run out of its stock. We would like to express our appreciation for your business over the years with these products and we hope the new, alternative parts will continue to serve your needs. Thank you very much.

Series	Size code	Models fordeletion	Year ofdeletion	Altermative model
FD	D	EEFFD*****	2019/3	EEFCS*****
CD	D	EEFCD*****	2019/3	EEFCX*****
UD	D	EEFUD*****	2019/3	EEFCX*****
UE	D	EEFUE*****	2019/3	EEFCX*****
SL	D	EEFSL*****	2019/3	EEFSX*****
SD	D	EEFSD*****	2010/6	EEFSX*****
SE	D	EEFSE*****	2019/3	EEFSX*****
MC	C	EEFMC*****	2019/3	EEFCX*****
HL	D	EEFHL*****	2019/3	EEFH*****
HD	D	EEFHD*****	2019/3	EEFH*****
HE	D	EEFHE*****	2019/3	EEFH*****





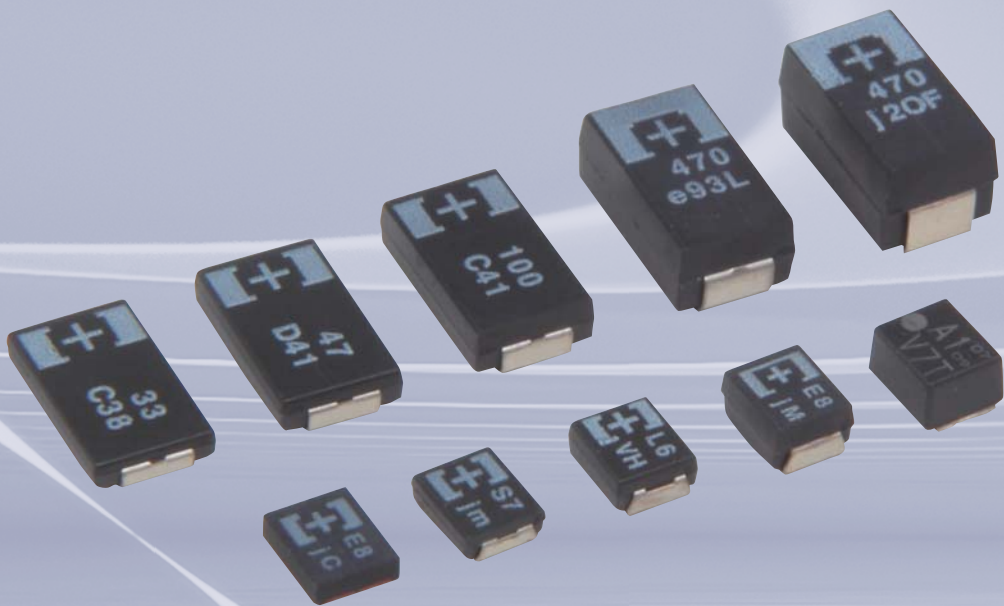

Conductive Polymer Tantalum  
Solid Capacitors

# POSCAP™

SP-Cap™

## Applications

**Main market**




Laptop computer




Communications infrastructure




Smart phone / Tablet




Audio / Visual




Server



Automotive



Industrial robot



Drone

Selection guide	P37	Guidelines and Precautions
	P39	Mounting specifications Packing specifications
Surface mount type	P41	Line-up
	P43	Series system diagram
	P45	Products list
	P47	TPG
	P48	TPSF
	P49	TPE
	P53	TPF
	P54	TQS
	P55	TQC
	P57	TA
	P58	TV
	P59	TH
	P60	TPB
	P61	TC
P63	TDC	
P64	TPC	
P65	Catalog Deletion models	
P66	EOL Models	

OS-CON™

Hybrid

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up Selection  
Series system diagram guide

Products list

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
TC  
TDC  
TPC

Surface  
mount  
type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ⚠ Application Guidelines

### 1. Circuit design

#### 1-1 Prohibited circuits

Since problems can be expected, **POSCAP** cannot be used on the following circuits

- (1) High impedance voltage retention circuits
- (2) Coupling circuits
- (3) Time constant circuits
- (4) Circuits greatly affected by leakage current
- (5) The circuit in which two or more **POSCAP** are connected in a series so as to raise the endurance voltage.

#### 1-2 Failure and life-span

The failure rate is 0.5 %\* / 1000 h (Confidence level : 60 %) based on JIS C 5003.

The mainly failure modes are as follows.

※B2 size or less : 1.0 %

##### 1-2-1 Contingency failure

The main causes of failure are thermal stresses cause by the soldering or thermal use environment, along with heat stresses, electrical stresses or mechanical stresses. The most common failure mode is a short circuit. In case a short circuit occurs, ensure safety by fully considering the followings.

- (1) If **POSCAP** emit smoke, turn off the main power of the equipment. In this case, keep your face and hands away from the area.
- (2) It may take a few seconds to a few minutes before **POSCAP** emits smoke by the situation. Increase safety by using a protective circuit.
- (3) If the smoke comes into eyes, rinse immediately. If the smoke is inhaled, gargle immediately.
- (4) In case a large current continues to flow after a short circuit, in the worst case, the shorted-out section may ignite. For safety, install a redundant circuit or a protective circuit, etc.

##### 1-2-2 Wear-out failure (lifetime)

When lifetime exceeded the specified guarantee time of Endurance and Damp heat, electrolyte might insulate and cause electric characteristic changed. This is called an open circuit. The electric characteristics of capacitance and ESR may possibly change within the specified range in specifications when it is used under the condition of the rated voltage, electric and mechanical performance. Please note it when design.

#### 1-3 Reduction of failure stress

When **POSCAP** is used within the rated voltage, it shows a stable characteristic, but it may be damaged in a short circuit when an overvoltage, for instance, is applied. The time to reach the failure mode can be extended by using **POSCAP** with reduced environment temperature, ripple current and applied voltage.

Failure rate

In the case of the endurance which is 105 °C 2000 h.

0.5 %/1000 h (Environment temp. : 105 °C, Rated voltage or Category voltage applied)

In the case of the endurance which is 105 °C 1000 h or 125 °C 1000 h.

1.0 %/1000 h (Environment temp. : 105 °C, Rated voltage or Category voltage applied)

In the case of the endurance which is 85 °C 1000 h.

1.0 %/1000 h (Environment temp. : 85 °C, Rated voltage applied)

#### 1-4 Check the rated performance

After checking the operation and installation environments, design the circuit so that it falls within the rated performance range stipulated in this delivery specification.

#### 1-5 Operating temperature and ripple current

- (a) Set the operating temperature so that it falls within the range stipulated in this delivery specification.
- (b) Do not apply current that exceeds the allowable ripple current. Ripple current should be controlled so that surface temperature of a capacitor do not exceed the rated temperature.  
(For questions regarding TQC series, please contact us.)
- (c) Specified ESR is a value at the time of shipping from factory. ESR may change upon use conditions.

#### 1-6 Leakage current

Even when the soldering conditions fall within the range of this delivery specifications, leakage current increases a little on occasion. It also increases a little during high temperature storage, high humidity storage and temperature cycling with no voltage applied. In cases such as these, leakage current will decrease by applying voltage under the condition of below the **POSCAP**'s maximum operating temperature.

The speed at which the leakage current is restored is increased by applying voltage when the **POSCAP**'s temperature is close to the maximum operating temperature.

#### 1-7 Rapid charge and discharge limitation

Rapid charge and discharge are restricted (for maintenance of high-proof reliability).

A protective circuit is recommended for when a rapid charge or discharge causes excessive rush current since this is main cause of short circuit and large leakage current. Use a protective circuits in case the rush current value exceeds 20 A\*

Be sure to insert a protection resistor of about 1 kΩ for charge and discharge when measuring the leakage current.

## 2. Mounting

### 2-1 Protect circuit

The failure mode of **POSCAP** is the short mode. When it breaks down, short electric current flows to it. **POSCAP** gives off heat by this short current.

Do the following consideration in design fully for the safety because it has a bad influence on the part around **POSCAP** due to this heat.

- A protective circuit and a protective device are set up, so as to make the system safer.
- A diffuse circuit and so on is set up, so as to make the system safer such as that a machine may not break down as to the single trouble.

### 2-2 Considerations when soldering

The soldering conditions are to be within the range prescribed in this delivery specification.

If the specifications are not followed, there is the possibility of degradation of electric characteristic and lifetime when soldering is conducted under conditions that are harsher than those stipulated.

### 2-3 Others

**POSCAP**'s Electrical characteristics are affected by temperature and frequency fluctuations. Design circuits after checking the amount of fluctuation.

## 3. Storage

It is necessary to set an environment to prevent a trouble at the time of soldering by the degradation of solder ability or moisture's getting into the molding resin when **POSCAP** are stored.

- Please make storage of **POSCAP** sealing up in the reel and storage bag at the time of delivery in the following environment. Also, set storage period of unopened as 18 months or shorter after shipment from factory.
  - Room temperature and room humidity (generally : 15 to 35 °C, 45 to 75% RH ) are desirable.
  - Place where **POSCAP** is not exposed by direct sunshine.
- Please unseal storage bag just before mounting and use up **POSCAP** in the storage bag.

Floor life		
Level	Time	Conditions
2a	4 weeks	≦ 30 °C/60 %Rh
3	168 hours	≦ 30 °C/60 %Rh
5	48 hours	≦ 30 °C/60 %Rh

**POSCAP** is not compatible with JEDEC J-STD-020, J-STD-033

## Intellectual property right

We, Panasonic Group are providing the product and service that customers can use without anxiety, and are working positively on the protection of our products under intellectual property rights. Representative patents relating to **POSCAP** are as follows:

US Patent No. 6858800, 6891717, 7158368, 7326260, 8081421, 8149569, 8456804, 8559166

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
TC  
TDC  
TPC

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

# Mounting specifications

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram Selection guide

Products list

TPG

TPSF

TPE

TPF

TQS

TQC

TA

TV

TH

TPB

TC

TDC

TPC

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide


Surface mount type

Radial lead type

### Recommended soldering condition


#### Peak temperature 250 °C lead free reflow soldering profile

The cycles of reflow soldering: Twice (max)

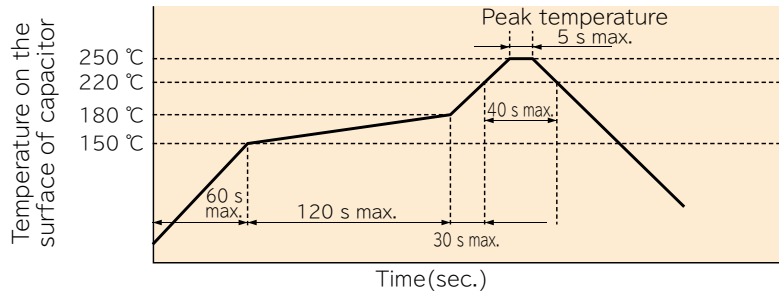


#### Peak temperature 260 °C lead free reflow soldering profile

This reflow is limited at moisture sensitive level.  
Please contact us separately concerning about detail.  
The cycles of reflow soldering: Twice (max)

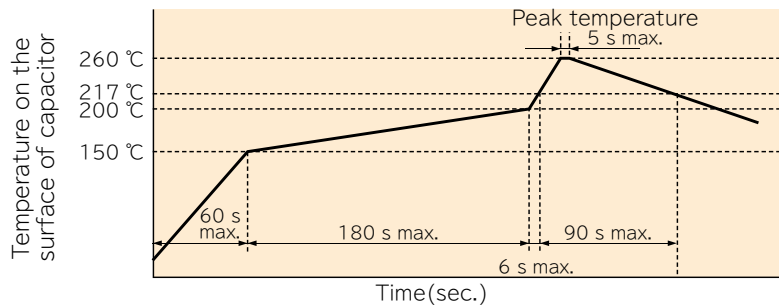

#### TQC series


The cycles of reflow soldering: Twice (max)

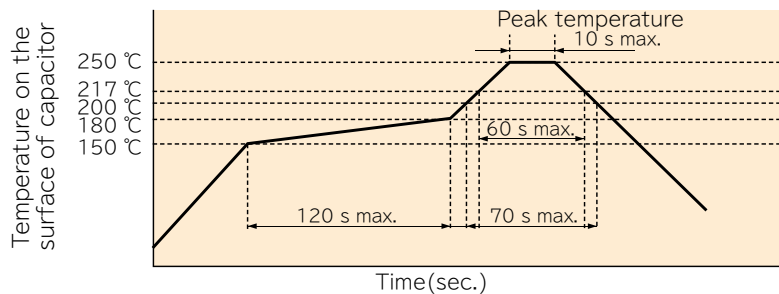

#### Soldering with a soldering iron

Tip of a soldering iron: 350 °C max (TQC serie: 400 °C max) Power of a soldering iron: 30 W max  
Working time: 3 sec. max (TQC serie: 5 sec max)  
(Do not let the tip of soldering iron touch the POSCAP itself. Do not subject the POSCAP itself to excessive stress when soldering)

### Land/Pad pattern

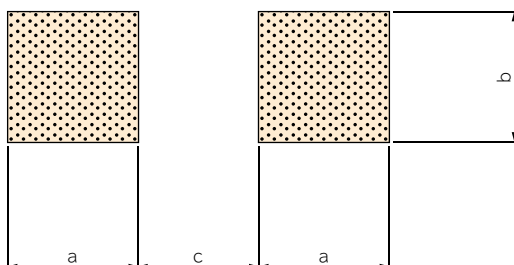

(unit:mm)

Size code	a	b	c	Size code	a	b	c
B1	1.6	2.7	1.4	D12	2.4	2.9	3.7
B1G	1.6	2.7	1.4	D15	2.4	2.9	3.7
B1S	1.6	2.7	1.4	D15E	2.4	2.9	3.7
B15G	1.6	2.7	1.4	D2E	2.4	2.9	3.7
B2	1.6	2.7	1.4	D2	2.4	2.9	3.7
B2S	1.6	2.7	1.4	D3L	2.4	2.9	3.7
				D4	2.4	2.9	3.7




# Packing specifications

\*We supply only embossed taping type

## Packing specifications

### Dimension of carrier tape

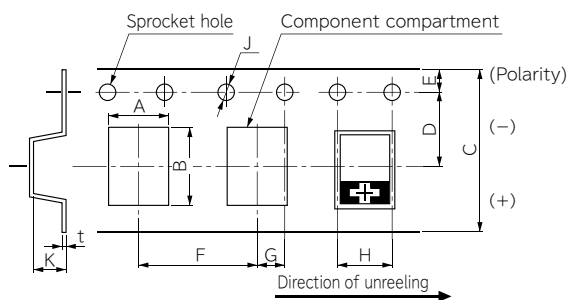


(unit:mm)

Size code	A ±0.1	B ±0.1	C ±0.3	D ±0.05	E ±0.1	F ±0.1	G ±0.05	H ±0.1	J $^{+0.1}_0$	K ±0.1	t ±0.05
B1	3.2	3.8	8.0	3.5	1.75	4.0	2.0	4.0	φ 1.5	1.4	0.25
B1G	3.25	3.9	8.0	3.5	1.75	4.0	2.0	4.0	φ 1.5	1.7	0.25
B1S	3.25	3.9	8.0	3.5	1.75	4.0	2.0	4.0	φ 1.5	1.7	0.25
B15G	3.25	3.9	8.0	3.5	1.75	4.0	2.0	4.0	φ 1.5	1.7	0.25
B2	3.3	3.8	8.0	3.5	1.75	4.0	2.0	4.0	φ 1.5	2.1	0.25
B2S	3.25	4.0	8.0	3.5	1.75	4.0	2.0	4.0	φ 1.5	2.1	0.25
D12	4.5	7.5	12.0	5.5	1.75	8.0	2.0	4.0	φ 1.5	1.7	0.3
D15	4.5	7.5	12.0	5.5	1.75	8.0	2.0	4.0	φ 1.5	2.4	0.3
D15E	4.7	7.8	12.0	5.5	1.75	8.0	2.0	4.0	φ 1.5	1.7	0.3
D2E	4.5	7.5	12.0	5.5	1.75	8.0	2.0	4.0	φ 1.5	2.4	0.3
D2	4.5	7.5	12.0	5.5	1.75	8.0	2.0	4.0	φ 1.5	2.4	0.3
D3L	4.5	7.7	12.0	5.5	1.75	8.0	2.0	4.0	φ 1.5	3.2	0.3
D4	4.5	7.7	12.0	5.5	1.75	8.0	2.0	4.0	φ 1.5	4.2	0.3

- Dimension A and B are the measure of compartment's inside bottom.
- The (+) Polarity of the chip is placed on right side towards the unreeling direction.
- Dimension of the topcover tape Thickness of cover tape:  $62 \pm 10 \mu\text{m}$  Width of cover tape:  $9.5 \pm 0.2 \text{ mm}$   $5.5 \pm 0.2 \text{ mm}$  (φ 180reel)

### Reel dimension

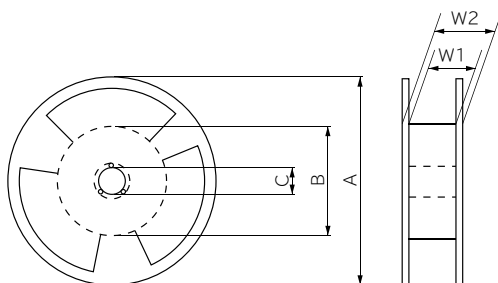

(unit:mm)


A	B	C	W1	W2
φ 330±2	φ 80±2	φ 13±0.2	13.5±0.5	17.5±1.0
φ 180 $^{+0}_-3$	φ 60±2	φ 13±0.2	9±0.5	11.4±1.0

### Minimum packing quantity and weight

Size code	Quantity(pcs./Reel, φ 180)	Typical weight(g)	Size code	Quantity(pcs./Reel, φ 330)	Typical weight(g)
B1	3000	200	D12	4500	1200
B1G	2500	200	D15	3000	1000
B1S	2500	200	D15E	4000	1000
B15G	2500	200	D2E	3000	1000
B2	2000	200	D2	3000	1000
B2S	2000	200	D3L	2500	1100
			D4	2000	1200

※Small order quantity (500 pcs/reel) is available with TPE, TPF and TQC series. Please contact our sales representative if you prefer it.

### Dimension of packing case



(unit:mm)

Reel size	φ 180	φ 330
a	90	120
b	240	360
c	240	360

### Units per packing case

Size code	Pieces/case	Size code	Pieces/case
B1	15000	D12	22500
B1G	12500	D15	15000
B1S	12500	D15E	20000
B15G	12500	D2E	15000
B2	10000	D2	15000
B2S	10000	D3L	12500
		D4	10000

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

TPG

TPSF

TPE

TPF

TQS

TQC

TA

TV

TH

TPB

TC

TDC

TPC

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

# Line-up

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram  
Products list

TPG

TPSF

TPE

TPF

TQS

TQC

TA

TV

TH

TPB

TC

TDC

TPC

Surface  
mount  
type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Series	Page	Features	Small size, low profile	Large capacitance	Low ESR	For automotive	High voltage	Guaranteed at 125 °C	Category temperature range (°C)	Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Size code	Size (mm)		
														L	W	H
TPG	47	Small size Low profile Large capacitance	●	●					-55 to 105	2.5 to 12.5	35 to 70	33 to 220	B1G	3.5	2.8	1.1
									-55 to 105	2.5 to 6.3	30 to 70	150 to 220	B15G	3.5	2.8	1.4
TPSF	48	Low ESR / Small size Large capacitance Face down terminal	●	●	●				-55 to 105	2.0 to 2.5	6 to 9	270	B2S	3.5	2.8	1.9
TPE	49 to 52	Low ESR							-55 to 105	2.0 to 10	11 to 35	47 to 470	B2	3.5	2.8	1.9
									-55 to 105	6.3	35	470	D15E	7.3	4.3	1.4
									-55 to 105	2.5 to 10	7 to 25	68 to 470	D2E	7.3	4.3	1.8
									-55 to 105	2.5 to 10	9 to 25	220 to 680	D3L	7.3	4.3	2.8
									-55 to 105	2.5 to 10	10 to 25	330 to 1500	D4	7.3	4.3	3.8
TPF	53	Low ESR Large capacitance	●	●					-55 to 105	2.0	6	220 to 330	D2E	7.3	4.3	1.8
									-55 to 105	2.5 to 10	5 to 15	150 to 680	D3L	7.3	4.3	2.8
									-55 to 105	2.5 to 6.3	5 to 10	470 to 1000	D4	7.3	4.3	3.8
TQS	54	High voltage					●		-55 to 105	16 to 35	70 to 150	6.8 to 33	B1S	3.5	2.8	1.1
TQC	55 to 56	High voltage							-55 to 105	16 to 35	90 to 400	3.9 to 33	B2	3.5	2.8	1.9
									-55 to 105	16	40	33	D12	7.3	4.3	1.15
									-55 to 105	16 to 25	55 to 70	22 to 47	D15	7.3	4.3	1.4
									-55 to 105	16 to 35	40 to 150	10 to 150	D2	7.3	4.3	1.9
									-55 to 105	16 to 25	50 to 70	68 to 150	D3L	7.3	4.3	2.8

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Series system diagram  
Products list

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
TC  
TDC  
TPC

Surface mount type

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide


Surface mount type

Radial lead type

Series	Page	Features	Small size, low profile	Large capacitance	Low ESR	For automotive	High voltage	Guaranteed at 125 °C	Category temperature range (°C)	Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Size code	Size (mm)					
														L	W	H			
TA	57	High reliability							-55 to 105	4.0 to 10	70	47 to 100	B2	3.5	2.8	1.9			
						●				-55 to 105	2.5 to 10	9 to 25	68 to 470	D2E	7.3	4.3	1.8		
										-55 to 105	2.5 to 10	15 to 25	150 to 680	D3L	7.3	4.3	2.8		
TV	58	High reliability Guaranteed at 125 °C							-55 to 125	6.3 to 10	25	68 to 150	D2E	7.3	4.3	1.8			
						●	●			-55 to 125	10	25	150	D3L	7.3	4.3	2.8		
TH	59	Guaranteed at 125 °C							-55 to 125	2.5 to 6.3	15 to 25	150 to 330	D2E	7.3	4.3	1.8			
										-55 to 125	2.5 to 10	40 to 45	68 to 220	D2	7.3	4.3	1.9		
									●		-55 to 125	4.0 to 6.3	40	220 to 330	D3L	7.3	4.3	2.8	
											-55 to 125	6.3 to 10	35 to 40	220 to 470	D4	7.3	4.3	3.8	
TPB	60	Standard							-55 to 105	4.0 to 10	70	33 to 68	B2	3.5	2.8	1.9			
										-55 to 105	4.0 to 10	40	150 to 330	D3L	7.3	4.3	2.8		
										-55 to 105	6.3 to 10	35 to 40	220 to 470	D4	7.3	4.3	3.8		
TC	61 to 62	Guaranteed at 125 °C							-55 to 125	4.0 to 6.3	15 to 25	100 to 330	D2E	7.3	4.3	1.8			
									●		-55 to 125	2.5 to 10	5 to 25	150 to 680	D3L	7.3	4.3	2.8	
											-55 to 125	2.5 to 10	5 to 25	330 to 1000	D4	7.3	4.3	3.8	
TDC	63	High voltage Guaranteed at 125 °C							-55 to 125	16 to 25	90 to 100	15 to 33	B3	3.5	2.8	1.9			
									●	●		-55 to 125	16	50	100	D2	7.3	4.3	1.9
											-55 to 125	16 to 25	50 to 70	68 to 150	D3L	7.3	4.3	2.8	
TPC	64	Low profile	●						-55 to 105	6.3 to 12.5	55 to 80	10 to 47	B1	3.5	2.8	1.1			
											-55 to 105	6.3 to 10	40 to 45	68 to 330	D2	7.3	4.3	1.9	

# Series system diagram

- SP-Cap**
- Guidelines and Precautions
- Mounting specifications
- Packing specifications
- Selection guide
- Surface mount type
- Catalog EOL models
- POSCAP**
- Guidelines and Precautions
- Mounting specifications
- Packing specifications
- Line-up
- Series system diagram
- Products list
- TPG
- TPSF
- TPE
- TPF
- TQS
- TQC
- TA
- TV
- TH
- TPB
- TC
- TDC
- TPC
- Surface mount type
- Catalog Deletion models
- Catalog EOL models
- OS-CON**
- Guidelines and Precautions
- Mounting specifications
- Packing specifications
- Selection guide
- Surface mount type
- Radial lead type
- Catalog EOL models
- Hybrid**
- Guidelines and Precautions
- Mounting specifications
- Packing specifications
- Selection guide
- Surface mount type
- Radial lead type

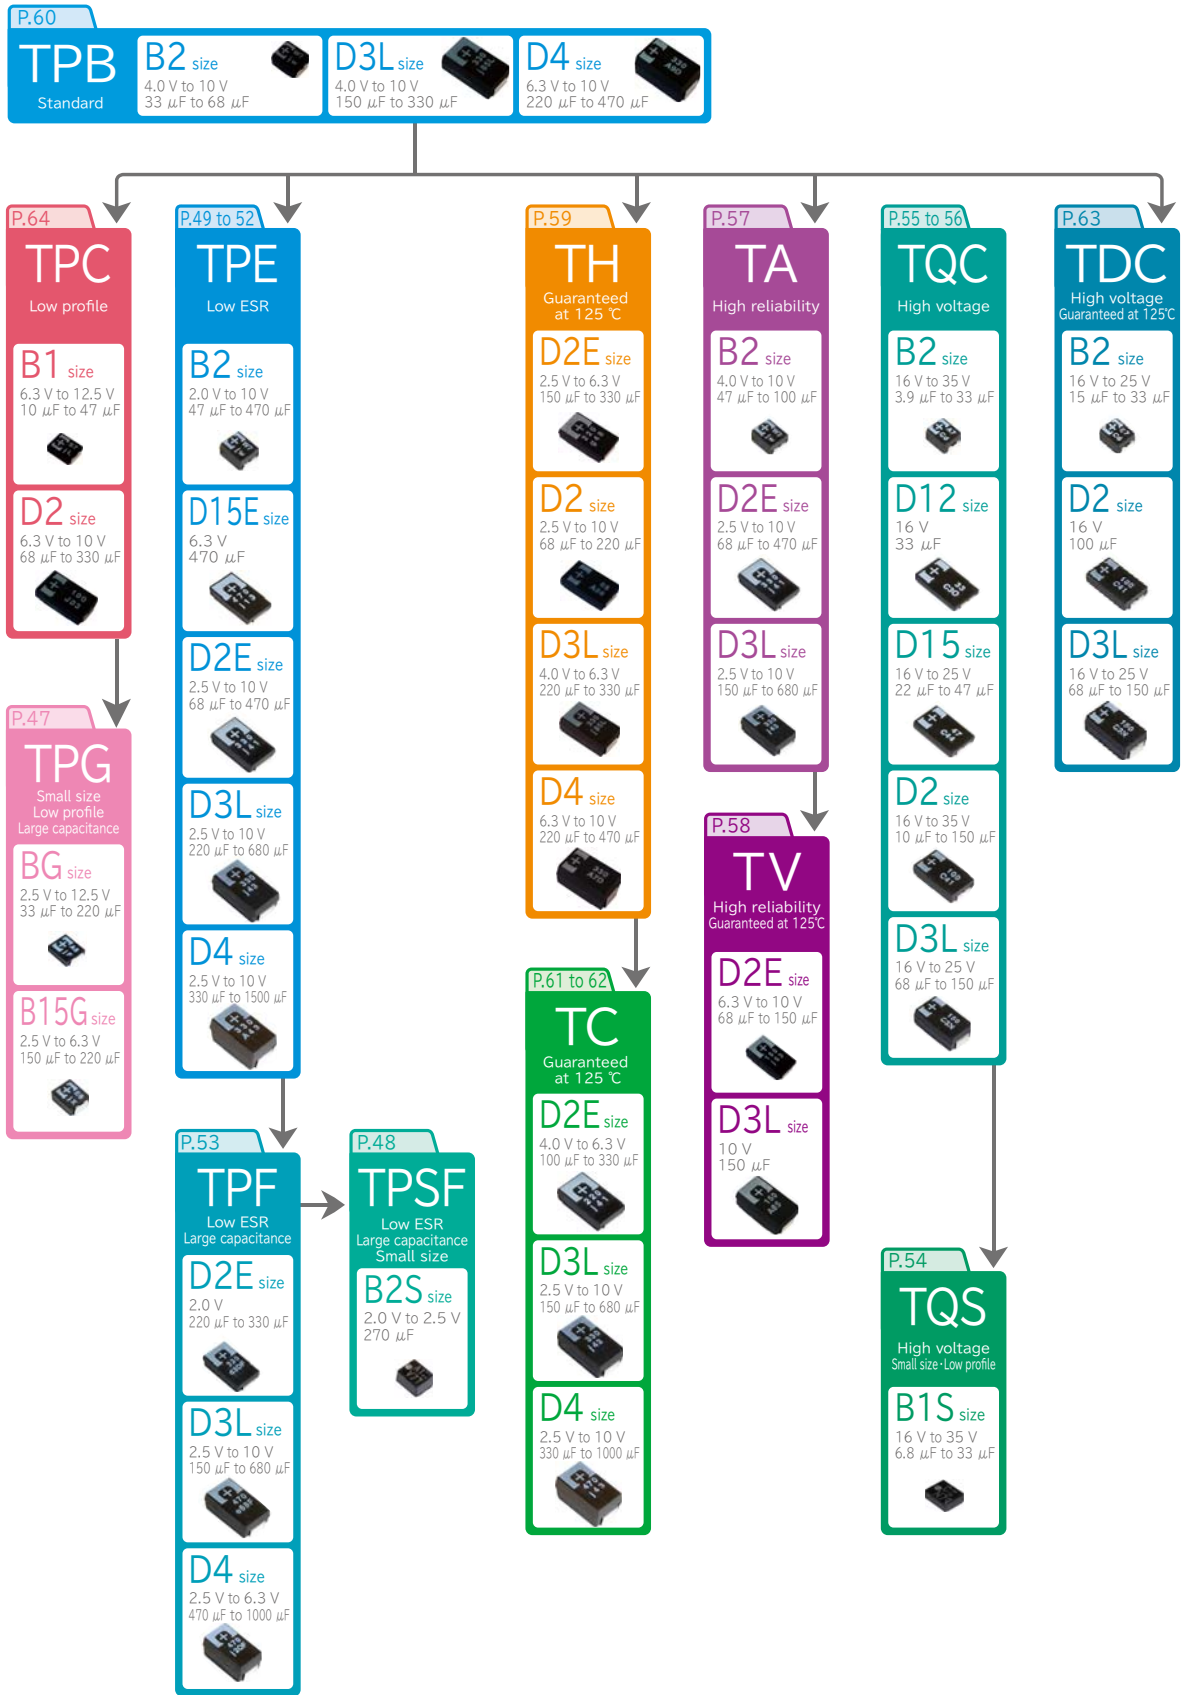


Case size

(Unit:mm)

	B1	B1G	B1S	B15G	B2	B2S	D12	D15	D15E	D2E	D2	D3L	D4
L	3.5	3.5	3.5	3.5	3.5	3.5	7.3	7.3	7.3	7.3	7.3	7.3	7.3
W	2.8	2.8	2.8	2.8	2.8	2.8	4.3	4.3	4.3	4.3	4.3	4.3	4.3
H	1.1	1.1	1.1	1.4	1.9	1.9	1.15	1.4	1.4	1.8	1.9	2.8	3.8

The size of each photo is nearly to full scale.

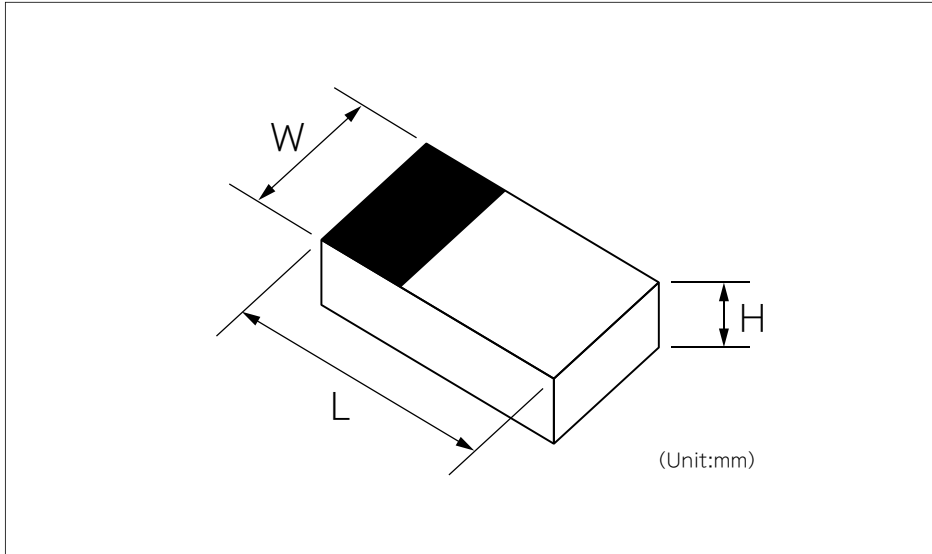

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide **Line-up**  
Series system diagram

Products list

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
TC  
TDC  
TPC

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

L×W×H (Unit:mm)

B1 size	B1G size	B1S size	B15G size
3.5×2.8×1.1	3.5×2.8×1.1	3.5×2.8×1.1	3.5×2.8×1.4
P.64	P.47	P.54	P.47
<b>TPC</b>	<b>TPG</b>	<b>TQS</b>	<b>TPG</b>
6.3 V to 12.5 V 10 μF to 47 μF	2.5 V to 12.5 V 33 μF to 220 μF	16 V to 35 V 6.8 μF to 33 μF	2.5 V to 6.3 V 150 μF to 220 μF

L×W×H (Unit:mm)

B2 size	B2S size	D12 size	D15 size	D15E size	D2E size	D2 size	D3L size	D4 size
3.5×2.8×1.9	3.5×2.8×1.9	7.3×4.3×1.15	7.3×4.3×1.4	7.3×4.3×1.4	7.3×4.3×1.8	7.3×4.3×1.9	7.3×4.3×2.8	7.3×4.3×3.8
P.49 to 50	P.48	P.56	P.56	P.51 to 52	P.51 to 52	P.56	P.51 to 52 P.60	P.51 to 52
<b>TPE</b>	<b>TPSF</b>	<b>TQC</b>	<b>TQC</b>	<b>TPE</b>	<b>TPE</b>	<b>TQC</b>	<b>TPE</b> <b>TPB</b>	<b>TPE</b>
2.0 V to 10 V 47 μF to 470 μF	2.0 V to 2.5 V 270 μF	16 V 33 μF	16 V to 25 V 22 μF to 47 μF	6.3 V 470 μF	2.5 V to 10 V 68 μF to 470 μF	16 V to 35 V 10 μF to 150 μF	2.5 V to 10 V 220 μF to 680 μF	4.0 V to 10 V 150 μF to 330 μF
P.55					P.53	P.59	P.53 P.61 to 62	P.53
<b>TQC</b>					<b>TPF</b>	<b>TH</b>	<b>TPF</b> <b>TC</b>	<b>TPF</b>
16 V to 35 V 3.9 μF to 33 μF					2.0 V 220 μF to 330 μF	2.5 V to 10 V 68 μF to 220 μF	2.5 V to 10 V 150 μF to 680 μF	2.5 V to 10 V 150 μF to 680 μF
P.57					P.57	P.63	P.56 P.63	P.59
<b>TA</b>					<b>TA</b>	<b>TDC</b>	<b>TQC</b> <b>TDC</b>	<b>TH</b>
4.0 V to 10 V 47 μF to 100 μF					2.5 V to 10 V 68 μF to 470 μF	16 V 100 μF	16 V to 25 V 68 μF to 150 μF	6.3 V to 10 V 220 μF to 470 μF
P.60					P.58	P.64	P.57	P.60
<b>TPB</b>					<b>TV</b>	<b>TPC</b>	<b>TA</b>	<b>TPB</b>
4.0 V to 10 V 33 μF to 68 μF					6.3 V to 10 V 68 μF to 150 μF	6.3 V to 10 V 68 μF to 330 μF	2.5 V to 10 V 150 μF to 680 μF	6.3 V to 10 V 220 μF to 470 μF
P.63					P.59		P.58	P.61 to 62
<b>TDC</b>					<b>TH</b>		<b>TV</b>	<b>TC</b>
16 V to 125 V 15 μF to 33 μF					2.5 V to 6.3 V 150 μF to 330 μF		10 V 150 μF	2.5 V to 10 V 330 μF to 1000 μF
					P.61 to 62		P.59	
					<b>TC</b>		<b>TH</b>	
					4.0 V to 6.3 V 100 μF to 330 μF		4.0 V to 6.3 V 220 μF to 330 μF	

The size of each photo is nearly to full scale.

# Products list

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

Selection guide

### Products list

- TPG
- TPSF
- TPE
- TPF
- TQS
- TQC
- TA
- TV
- TH
- TPB
- TC
- TDC
- TPC

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Size • ESR Matrix list

Size code (ESR mΩ)

V	Series	3.9	4.7	5.6	6.8	8.2	10	15	22	33	47	68
2.0	TPSF											
	TPE											
	TPF											
2.5	TPG											
	TPSF											
	TPE											
	TPF											
	TA											
	TH											
4.0	TPG											
	TPE											
	TPF											
	TA											
	TPB											B2 (70)
	TH											
6.3	TPG											
	TPE											
	TPF											
	TA										B2 (70)	B2 (70)
	TV											
	TPB									B2 (70)		B2 (70)
	TPC											
	TH										B1 (70,55)	
8.0	TPG										B1G (70)	
	TPE											
	TPC								B1 (70)			
10	TPG										B1G (70)	
	TPE										B2 (35)	D2E (25)
	TPF											
	TA										B2 (70)	D2E (25)
	TV											D2E (25)
	TPB									B2 (70)	B2 (70)	
	TPC											D2 (45)
	TH											D2 (45)
12.5	TPG										B1G (70)	
	TPC						B1 (80)	B1 (80)				
16	TQC						B2 (100)	B2 (90)	B2 (90)	B2 (90)	D15 (55)	D2 (50)
	TQS									D12 (40)	D2 (55,40)	
	TDC									B1S (70)		
	TDC									B2 (90)		
20	TQC					B2 (100)			B2 (90)	D2 (60)	D15 (55)	
	TDC								B2 (90)		D2 (55)	
25	TQC			B2 (100)				B2 (100)	D15 (70)	D2 (60)		D3L (70)
	TQS							D2 (90,45)	D2 (60,45)			
	TDC						B1S (100)					
35	TQC	B2 (400)						B2 (100)				
	TQS				B1S (150)			D2 (120)	D2 (150)			

## Case size

(unit : mm)

	B1	B1G	B1S	B15G	B2	B2S	D12	D15	D15E	D2E	D2	D3L	D4
L	3.5	3.5	3.5	3.5	3.5	3.5	7.3	7.3	7.3	7.3	7.3	7.3	7.3
W	2.8	2.8	2.8	2.8	2.8	2.8	4.3	4.3	4.3	4.3	4.3	4.3	4.3
H	1.1	1.1	1.1	1.4	1.9	1.9	1.15	1.4	1.4	1.8	1.9	2.8	3.8



## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Series system diagram  
Products list

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
TC  
TDC  
TPC

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

V	Series	100	120	150	220	270	330	470	680	1000	1500
2.0	TPSF					B2S (9 / 6)					
	TPE						B2 (15,13)	B2 (15,11)			
	TPF				D2E (6)		D2E (6)				
2.5	TPG				B1G (70) B15G (30)						
	TPSF					B2S (6)					
	TPE				B2 (35,25,21,15) D2E (25,18,15,9)		B2 (35,15,9) D2E (25,18,15,12,9,7)	D2E (18,15,12,9,7)	D3L (15,12)	D4 (15)	D4 (15,12)
	TPF						D3L (7)	D3L (10,7,6)	D3L (10,7,6)	D4 (6,5)	
	TA				D2E (25,15,9)		D2E (25,18,15)	D2E (25,15)	D3L (25,15)		
	TH				D2 (45)		D2E (25,18,15)				
	TC								D3L (15,12,10,7,6,5) D4 (5)	D4 (15,6,5)	
4.0	TPG				B15G (70)						
	TPE	B2 (35)		B2 (35)	B2 (35)		D2E (25,18)	D3L (25,18,15,12)			
	TPF				D2E (18)	D2E (25,18,15)					
	TA	B2 (70)			D2E (25,18)		D3L (12)	D3L (10)	D4 (10)		
	TPB						D3L (40)	D3L (25,18)			
	TH				D2E (25,18,15)		D3L (40)				
	TC			D2E (18)	D2E (25,18,15)		D2E (25,18)	D3L (25,18,15,12,10)	D4 (10)		
6.3	TPG	B1G (70,55,35)		B15G (70,35)							
	TPE	B2 (35,25) D2E (25,18)	B2 (35)	B2 (35,25) D2E (25,18,15)	B2 (35,25) D2E (25,18)		D2E (25) D3L (25,18,15,9)	D15E (35) D4 (25,18)	D4 (25,18)		
	TPF				D3L (12,9,5)		D3L (9)	D4 (10)			
	TA			D2E (25)	D2E (25,18)		D3L (25)				
	TV			D2E (25)							
	TPB				D3L (40)		D3L (40)	D4 (35)			
	TPC	D2 (45)		D2 (40)			D4 (40) D2 (40)				
	TH			D2E (25,18) D2 (40)	D3L (40)		D4 (40)	D4 (35)			
	TC	D2E (25,18)		D2E (25,18,15)	D2E (25,18)		D3L (25,18,15,9) D3L (12,9,5)	D4 (25,18,10)	D4 (25,18)		
	8.0	TPG									
TPE		B2 (35)									
TPC				D2 (40)							
10	TPG										
	TPE				D3L (25,18)		D4 (25)				
	TPF			D3L (15)							
	TA			D3L (25)	D3L (25)						
	TV			D3L (25)							
	TPB			D3L (40)	D3L (40)		D4 (35)				
	TPC	D2 (45)									
12.5	TPG										
	TPC										
	TQC	D2 (50)		D3L (50) D2 (70)							
16	TQC										
	TQS										
	TDC	D2 (50)		D3L (50)							
20	TQC	D3L (55) D2 (100)									
	TDC	D3L (55)									
25	TQC										
	TQS										
	TDC										
35	TQC										
	TQS										



Small size, Low profile (L3.5xW2.8xH1.1 mm)

Large capacitance (220 μF max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications	
Size code	B1G	B15G
Category temperature range	-55 °C to +105 °C	
Rated voltage range	2.5 V to 12.5 V	2.5 V to 6.3 V
Category voltage range	2 V to 10 V	2 V to 5 V
Rated capacitance range	33 μF to 220 μF	150 μF to 220 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Surge voltage(V)	Rated voltage x1.15	
Endurance	+85 °C, 1000 h, rated voltage applied	
	Capacitance change	Within±20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage	
	Capacitance change	Within+40 %, -20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	≤ 3 times of the initial limit

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

Selection guide

Surface mount type

Catalog Deletion models

Catalog EOL models

## Marking and dimensions

R. capacitance code

Polarity marking (+)

R. voltage code

Lot. No.

(unit : mm)

Size code	L +0.3/-0.1	W +0.3/-0.1	H ±0.1	S ±0.2	W1 ±0.1
B1G	3.5	2.8	1.1	0.8	2.2
B15G	3.5	2.8	1.4	0.8	2.2

R. voltage (V)	2.5	4.0	6.3	8.0	10.0	12.5
Code	e	g	j	k	A	B

R. cap. (μF)	33	47	100	150	220
Code	N7	S7	A8	E8	J8

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life		
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C	
TPG	2.5	85	2	105	220	3.5	2.8	1.1	B1G	1000	70	0.10	55.0	2R5TPG220M	2500	3	3	
						3.5	2.8	1.4	B15G	1400	30/300kHz	0.10	110.0	2R5TPG220MUG	2500			
	4	85	3.2	105		100	3.5	2.8	1.4	B15G	1000	70	0.10	88.0	4TPG220M			2500
							6.3	85	5	105	100	3.5	2.8	1.1	B1G			1000
	6.3	85	5	105		150						3.5	2.8	1.1	B1G			1100
							6.3	85	5	105	150	3.5	2.8	1.1	B15G			1200
	6.3	85	5	105	150	3.5						2.8	1.4	B15G	1000			70
						6.3	85	5	105	150	3.5	2.8	1.4	B15G	1200			35/300kHz
	8	85	6.3	105	47						3.5	2.8	1.1	B1G	1000			70
						10	85	8	105	47	3.5	2.8	1.1	B1G	1000			70
	12.5	85	10	105	33						3.5	2.8	1.1	B1G	1000			70

※1: Ripple current (100 kHz/ +45 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



## Specifications

Items	Specifications	
Size code	B2S	
Category temperature range	-55 °C to +105 °C	
Rated voltage range	2 V to 2.5 V	
Category voltage range	2 V to 2.5 V	
Rated capacitance range	270 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Surge voltage(V)	Rated voltage x1.15	
Endurance	+105 °C, 1000 h rated voltage applied	
	Capacitance change	Within±20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage	
	Capacitance change	Within+40 %, -20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	≤ 3 times of the initial limit

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

TPG
<b>TPSF</b>
TPE
TPF
TQS
TQC
TA
TV
TH
TPB
TC
TDC
TPC

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Marking and dimensions

Size code	L ±0.2	W ±0.2	H ±0.1	S ±0.3	W1 ±0.1
B2S	3.5	2.8	1.9	0.8	2.2

R. voltage (V)	2.0	2.5	R. cap. (μF)	270
Code	d	e	Code	L8

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C
TPSF	2	105	2	105	270	3.5	2.8	1.9	B2S	3200	6/500kHz	0.08	108.0	2TPSF270M6E	2000	5	5
		105	2	105		3.5	2.8	1.9		2400	9/300kHz	0.08	108.0	2TPSF270M9G	2000	3	3
	2.5	105	2.5	105		3.5	2.8	1.9		3200	6/500kHz	0.08	135.0	ETPSF270M6E	2000	3	3

※1:Ripple current (100 kHz/ +45 °C )

※2:ESR (100 kHz/+20 °C)

※3:tan δ (120 Hz/+20 °C)

※4:After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Small size(L3.5xW2.8xH1.9 mm)

Low ESR(15 mΩ)

RoHS compliance, Halogen free

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications	
Size code	B2	
Category temperature range	-55 °C to +105 °C	
Rated voltage range	2 V to 10 V	
Category voltage range	1.8 V to 8 V	
Rated capacitance range	47 μF to 470 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Surge voltage(V)	Rated voltage x1.15	
Endurance	+105 °C, 1000 h rated voltage applied ※Rated temp, 85 °C Products: 85 °C, 1000 h, rated voltage applied	
	Capacitance change	Within±20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
Damp heat (Steady state)	DC leakage current	Within the initial limit
	Capacitance change	+60 °C, 90 % to 95 %, 500 h, No-applied voltage Within+50 %, -20 % (2R5TPE220MAZB(MAPB,MAFB), 2R5TPE330MAZB, 2TPE330MAFB(MADGB), 2TPE470MAJGB(MAFB), 2TPE330MFB, ETPE330MAFB (MA9GB) )
		tan δ
	DC leakage current	≤ 3 times of the initial limit

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up Selection guide

Series system diagram

Products list

TPG

TPSF

**TPE**

TPF

TQS

TQC

TA

TV

TH

TPB

TC

TDC

TPC

Surface mount type

Catalog Deletion models

Catalog EOL models

## ● Marking and dimensions

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

(unit : mm)

Size code	L ±0.2	W ±0.2	H ±0.1	S ±0.2	W1 ±0.1
B2	3.5	2.8	1.9	0.8	2.2

R. voltage (V)	2.0	2.5	4.0	6.3	8.0	10.0
Code	d	e	g	j	k	A

R. cap. (μF)	47	100	120	150	220	330	470
Code	S7	A8	C8	E8	J8	N8	S8

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life		
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≦260°C	Reflow temp. ≦250°C	
TPE	2	105	2	105	330	3.5	2.8	1.9	B2	2000	15	0.08	132.0	2TPE330MFB	2000	3	3	
		85	1.8	105		3.5	2.8	1.9		2000	15	0.08	132.0	2TPE330MAFB	2000			
		85	1.8	105		3.5	2.8	1.9		2000	13/300 kHz	0.08	132.0	2TPE330MADGB	2000			
		85	1.8	105	470	3.5	2.8	1.9		2300	15	0.10	188.0	2TPE470MAFB	2000			
		85	1.8	105		3.5	2.8	1.9		2300	11/300 kHz	0.10	188.0	2TPE470MAJGB	2000			
	2.5	85	2	105	220	3.5	2.8	1.9		2000	15	0.08	110.0	2R5TPE220MAFB	2000			
		105	2.5	105		3.5	2.8	1.9		1800	15/300 kHz	0.08	110.0	2R5TPE220MFGB	2000			
		105	2.5	105		3.5	2.8	1.9		1700	21	0.08	55.0	2R5TPE220MLB	2000			
		85	2	105		3.5	2.8	1.9		1600	25	0.08	55.0	2R5TPE220MAPB	2000			
		105	2.5	105		3.5	2.8	1.9		1400	35	0.08	55.0	2R5TPE220MZB	2000			
		85	2	105	330	3.5	2.8	1.9		1400	35	0.08	55.0	2R5TPE220MAZB	2000			
		85	2	105		3.5	2.8	1.9		1400	35	0.08	82.5	2R5TPE330MAZB	2000			
		85	2	105		3.5	2.8	1.9		3200	9/300 kHz	0.08	165.0	ETPE330MA9GB	2000			
		105	2.5	105		3.5	2.8	1.9		3200	9/300 kHz	0.08	165.0	ETPE330M9GB	2000			
		85	2	105		3.5	2.8	1.9		2700	15	0.08	165.0	ETPE330MAFB	2000			
	4	105	2.5	105	100	3.5	2.8	1.9		2700	15	0.08	165.0	ETPE330MFB	2000			
		105	2.5	105		3.5	2.8	1.9		1400	35	0.08	40.0	4TPE100MZB	2000			
		85	3.2	105		150	3.5	2.8		1.9	1400	35	0.08	60.0	4TPE150MAZB			2000
		85	3.2	105		220	3.5	2.8		1.9	1400	35	0.08	88.0	4TPE220MAZB			2000
		105	6.3	105		3.5	2.8	1.9		1600	25	0.08	63.0	6TPE100MPB	2000			
		6.3	85	5	105	100	3.5	2.8		1.9	1400	35	0.08	63.0	6TPE100MAZB			2000
			105	6.3	105		3.5	2.8		1.9	1400	35	0.08	63.0	6TPE100MZB			2000
			85	5	105	120	3.5	2.8		1.9	1400	35	0.08	75.6	6TPE120MAZB			2000
			85	5	105		3.5	2.8		1.9	1600	25	0.08	94.5	6TPE150MAPB			2000
			85	5	105		3.5	2.8		1.9	1400	35	0.08	94.5	6TPE150MAZB			2000
	8		85	5	105	150	3.5	2.8		1.9	1400	35	0.08	94.5	6TPE150MAZB			2000
			85	5	105		3.5	2.8		1.9	1400	35	0.10	138.6	6TPE220MAZB			2000
			85	5	105	220	3.5	2.8		1.9	1600	25	0.10	138.6	6TPE220MAPB			2000
	8	85	6.3	105	100		3.5	2.8		1.9	1400	35	0.08	80.0	8TPE100MAZB			2000
	10	85	8	105	47	3.5	2.8	1.9		1400	35	0.08	47.0	10TPE47MAZB	2000			

※1: Ripple current (100 kHz/ +45 °C)

※2: ESR (100 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

※: Small order quantity (500 pcs/reel) is available with TPE series. Please contact our sales representative if you prefer it.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

TPG	TPSF
<b>TPE</b>	TPF
TQS	TQC
TA	TV
TH	TPB
TC	TDC
TPC	

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Low profile (Height 1.5 mm max.)    Low ESR(7 mΩ)    Large capacitance(1500 μF max.)    RoHS compliance, Halogen free

**SP-Cap**

● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications			
	D15E	D2E	D3L	D4
Size code	D15E	D2E	D3L	D4
Category temperature range	-55 °C to +105 °C			
Rated voltage range	6.3 V	2.5 V to 10 V		
Category voltage range	5 V	2.5 V to 10 V		
Rated capacitance range	470 μF	68 μF to 470 μF	220 μF to 680 μF	330 μF to 1500 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor(tan δ)	Please see the attached characteristics list			
Surge voltage(V)	Rated voltage x1.15			
Endurance	+105 °C, 2000 h, rated voltage applied ※Rated temp, 85 °C products:85 °C, 1000 h, rated voltage applied 6TPE330MAP, 6TPE470MAZU:85 °C, 2000 h			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 1.5 times of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage			
	Capacitance change	Within+50 %, -20 % (2R5TPE220M(I, F, 9), 2R5TPE330M(I, F, C, 9, 7), 2R5TPE470M(I, F, C, 9, 7), 2R5TPE1000MF, 2R5TPE1000M(F, C))		
	tan δ	≤ 1.5 times of the initial limit		
	DC leakage current	≤ 3 times of the initial limit		

**POSCAP**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Selection guide

Products list

TPG  
TPSF  
**TPE**  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
TC  
TDC  
TPC

Surface mount type

Catalog Deletion models  
Catalog EOL models

● Marking and dimensions

(unit : mm)

Size code	L ±0.3	W ±0.2	H ±0.2※1	S ±0.2	W1 ±0.1
D15E	7.3	4.3	1.4	1.1	2.4
D2E	7.3	4.3	1.8	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

※1 ±0.1: D2E, D15E

R. voltage (V)	2.5	4.0	6.3	10.0
Code	e	g	j	A

**OS-CON**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

**Hybrid**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life			
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C		
TPE	2.5	105	2.5	105	220	7.3	4.3	1.8	D2E	3900	9	0.10	55.0	2R5TPE220M9	3000	3			
						7.3	4.3	1.8		3100	15	0.10	55.0	2R5TPE220MF	3000				
						7.3	4.3	1.8		2800	18	0.10	55.0	2R5TPE220MI	3000				
						7.3	4.3	1.8		2400	25	0.10	55.0	2R5TPE220M	3000				
		7.3	4.3	1.8	330	7.3	4.3	1.8	D2E	4400	7	0.10	82.5	2R5TPE330M7	3000				
		7.3	4.3	1.8		3900	9	0.10		82.5	2R5TPE330M9	3000							
		7.3	4.3	1.8		3500	12	0.10		82.5	2R5TPE330MC	3000							
		7.3	4.3	1.8		3100	15	0.10		82.5	2R5TPE330MF	3000							
		7.3	4.3	1.8	470	7.3	4.3	1.8	D2E	2800	18	0.10	82.5	2R5TPE330MI	3000				
		7.3	4.3	1.8		2400	25	0.10		82.5	2R5TPE330M	3000							
		7.3	4.3	1.8		4400	7	0.10		117.5	2R5TPE470M7	3000							
		7.3	4.3	1.8		3900	9	0.10		117.5	2R5TPE470M9	3000							
		7.3	4.3	1.8	680	7.3	4.3	1.8	D3L	3500	12	0.10	170.0	2R5TPE470MC	3000				
		7.3	4.3	1.8		3100	15	0.10		170.0	2R5TPE470MF	3000							
		7.3	4.3	2.8		1000	7.3	4.3		2.8	D4	2800	18	0.10	117.5			2R5TPE470MI	3000
		7.3	4.3	2.8			3500	12		0.10		170.0	2R5TPE680MCL	2500					
		7.3	4.3	3.8	3100		15	0.10	170.0	2R5TPE680MFL		2500							
		7.3	4.3	3.8	1500		7.3	4.3	3.8	D4		3900	15	0.15	250.0			2R5TPE1000MF	2000
		7.3	4.3	3.8		4400	12	0.15	375.0		2R5TPE1500MC	2000							
		7.3	4.3	3.8		3900	15	0.15	375.0		2R5TPE1500MF	2000							
	7.3	4.3	3.8	4		7.3	4.3	1.8	D2E		2800	18	0.10	60.0	4TPE150MI	3000			
	7.3	4.3	1.8		3100	15	0.10	88.0		4TPE220MF	3000								
	7.3	4.3	1.8		2800	18	0.10	88.0		4TPE220MI	3000								
	7.3	4.3	1.8		2400	25	0.10	88.0		4TPE220M	3000								
	7.3	4.3	1.8	330	7.3	4.3	1.8	D2E	2800	18	0.10	132.0	4TPE330MI	3000					
	7.3	4.3	1.8		2400	25	0.10		132.0	4TPE330M	3000								
	7.3	4.3	2.8		470	7.3	4.3		2.8	D3L	3500	12	0.10	188.0	4TPE470MCL	2500			
	7.3	4.3	2.8			3100	15		0.10		188.0	4TPE470MFL	2500						
	7.3	4.3	2.8	2800		18	0.10	188.0	4TPE470MIL		2500								
	7.3	4.3	2.8	2400		25	0.10	188.0	4TPE470ML		2500								
	7.3	4.3	1.8	100	7.3	4.3	1.8	D2E	2800	18	0.10	63.0	6TPE100MI	3000					
	7.3	4.3	1.8		2400	25	0.10		63.0	6TPE100M	3000								
	7.3	4.3	1.8		150	7.3	4.3		1.8	D2E	3100	15	0.10	94.5	6TPE150MF	3000			
	7.3	4.3	1.8			2800	18		0.10		94.5	6TPE150MI	3000						
	7.3	4.3	1.8	2400		25	0.10	94.5	6TPE150M		3000								
	7.3	4.3	1.8	220		7.3	4.3	1.8	D2E		2800	18	0.10	138.6	6TPE220MI	3000			
	7.3	4.3	1.8		2400	25	0.10	138.6		6TPE220M	3000								
	7.3	4.3	1.8		6.3	7.3	4.3	1.8		D3L	2400	25	0.10	138.6	6TPE220MAP	3000			
	7.3	4.3	1.8			2400	25	0.10			207.9	6TPE330MAP	3000						
	7.3	4.3	2.8	2400		25	0.10	207.9	6TPE330MAL		2500								
	7.3	4.3	2.8	330		7.3	4.3	2.8	D3L		3900	9/500 kHz	0.10	207.9	6TPE330MA9EL	2500			
	7.3	4.3	2.8		3100	15	0.10	207.9		6TPE330MFL	2500								
	7.3	4.3	2.8		2800	18	0.10	207.9		6TPE330MIL	2500								
	7.3	4.3	2.8		470	7.3	4.3	2.8		D4	2400	25	0.10	207.9	6TPE330ML	2500			
	7.3	4.3	3.8	4400		10	0.10	207.9	6TPE330MAA		2000								
	7.3	4.3	1.4	680		7.3	4.3	1.4	D15E		1700	35	0.10	296.1	6TPE470MAZU	4000			
	7.3	4.3	3.8			3500	18	0.15			296.1	6TPE470MI	2000						
	7.3	4.3	3.8		3000	25	0.15	296.1		6TPE470M	2000								
	7.3	4.3	3.8		10	7.3	4.3	3.8		D4	3500	18	0.15	428.4	6TPE680MI	2000			
	7.3	4.3	3.8	3000		25	0.15	428.4	6TPE680M		2000								
7.3	4.3	1.8	10	7.3		4.3	1.8	D2E	2400		25	0.10	68.0	10TPE68M	3000				
7.3	4.3	2.8		220		7.3	4.3		2.8		D3L	2800	18	0.10	220.0	10TPE220MIL	2500		
7.3	4.3	2.8			2400	25	0.10		220.0	10TPE220ML		2500							
7.3	4.3	3.8			330	7.3	4.3		3.8	D4		3000	25	0.10	330.0	10TPE330M	2000		

※1:Ripple current (100 kHz/ +45 °C) ※2:ESR (100 kHz/+20 °C) ※3:tanδ (120 Hz/+20 °C) ※4:After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

※:Small order quantity (500 pcs/reel) is available with TPE series. Please contact our sales representative if you prefer it.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

TPG
TPSF
<b>TPE</b>
TPF
TQS
TQC
TA
TV
TH
TPB
TC
TDC
TPC

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type





Super low ESR(5 mΩ)

Large capacitance(1000 μF max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications		
	D2E	D3L	D4
Size code	D2E	D3L	D4
Category temperature range	-55 °C to +105 °C		
Rated voltage range	2 V	2.5 V to 10 V	2.5 V to 6.3 V
Category voltage range	2 V	2.5 V to 10 V	2.5 V to 6.3 V
Rated capacitance range	220 μF to 330 μF	150 μF to 680 μF	470 μF to 1000 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)		
Leakage current	Please see the attached characteristics list		
Dissipation factor(tan δ)	Please see the attached characteristics list		
Surge voltage(V)	Rated voltage x1.15		
Endurance	+105 °C, 2000 h, rated voltage applied		
	Capacitance change	Within±20 % of the initial value	
	tan δ	≤ 1.5 times of the initial limit	
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage		
	Capacitance change	Within+50 %, -20 % of the initial value(2TPF220M6, 2TPF330M6, ETPF1000M6H(5H))	
	tan δ	≤ 1.5 times of the initial limit	
DC leakage current	Within the initial limit		
	≤ 3 times of the initial limit		

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Selection guide

Products list

- TPG
- TPSF
- TPE
- TPF**
- TQS
- TQC
- TA
- TV
- TH
- TPB
- TC
- TDC
- TPC

Surface mount type

Catalog Deletion models

Catalog EOL models

## Marking and dimensions

Size code	L ±0.3	W ±0.2	H ±0.2※1	S ±0.2	W1 ±0.1
D2E	7.3	4.3	1.8	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

R. voltage (V)	2.0	2.5	4.0	6.3	10.0
Code	d	e	g	j	A

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C
TPF	2	105	2	105	220	7.3	4.3	1.8	D2E	4700	6	0.10	88.0	2TPF220M6	3000	3	2a
										4700	6	0.10	132.0	2TPF330M6	3000		
	2.5	105	2.5	105	330	7.3	4.3	1.8	D2E	4400	7	0.10	82.5	2R5TPF330M7L	2500		
										4400	6	0.10	117.5	2R5TPF470M6L	2500		
		105	2.5	105	470	7.3	4.3	2.8	D3L	4400	7	0.10	117.5	2R5TPF470M7L	2500		
										4400	10	0.10	117.5	2R5TPF470ML	2500		
		105	2.5	105	680	7.3	4.3	3.8	D4	6100	5	0.10	117.5	ETPF470M5H	2000		
										4400	6	0.10	170.0	2R5TPF680M6L	2500		
		105	2.5	105	680	7.3	4.3	2.8	D3L	4400	7	0.10	170.0	2R5TPF680M7L	2500		
										4400	10	0.10	170.0	2R5TPF680ML	2500		
		105	2.5	105	1000	7.3	4.3	3.8	D4	6100	5	0.10	170.0	ETPF680M5H	2000		
										5600	6	0.10	250.0	ETPF1000M6H	2000		
	4	105	4	105	330	7.3	4.3	2.8	D3L	4000	12	0.10	132.0	4TPF330ML	2500		
										4400	10	0.10	188.0	4TPF470ML	2500		
		105	4	105	680	7.3	4.3	3.8	D4	4400	10	0.10	272.0	4TPF680MAH	2000		
										6100	5	0.10	138.6	6TPF220M5L	2500		
	6.3	105	6.3	105	220	7.3	4.3	2.8	D3L	4600	9	0.10	138.6	6TPF220M9L	2500		
										4000	12	0.10	138.6	6TPF220ML	2500		
		105	6.3	105	330	7.3	4.3	2.8	D3L	3900	9	0.10	207.9	6TPF330M9L	2500		
										4400	10	0.10	296.1	6TPF470MAH	2000		
10		105	10	105	150	7.3	4.3	2.8	D3L	3600	15	0.10	150.0	10TPF150ML	2500		

※1: Ripple current (100 kHz/ +45 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

※: Small order quantity (500 pcs/reel) is available with TPF series. Please contact our sales representative if you prefer it.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



High voltage (35 V max.)

RoHS compliance, Halogen free

## Specifications

Items	Specifications	
Size code	B1S	
Category temperature range	-55 °C to +105 °C	
Rated voltage range	16 V to 35 V	
Category voltage range	16 V to 35 V	
Rated capacitance range	6.8 μF to 33 μF	
Capacitance tolerance	±20 % (120 Hz / +20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Surge voltage (V)	Rated voltage x 1.15	
Endurance	+105 °C, 1000 h, rated voltage applied	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage	
	Capacitance change	Within +40 %, -20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	≤ 3 times of the initial limit

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

TPG
TPSF
TPE
TPF
<b>TQS</b>
TQC
TA
TV
TH
TPB
TC
TDC
TPC

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

## Marking and dimensions

Size code	L ±0.2	W ±0.2	H ±0.1	S ±0.3	W1 ±0.1
B1S	3.5	2.8	1.1	0.8	2.2

R. voltage (V)	16	25	35
Code	C	E	V

R. cap. (μF)	6.8	10	33
Code	W6	A7	N7

(unit : mm)

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C
TQS	16	105	16	105	33	3.5	2.8	1.1	B1S	1500	70	0.1	52.8	16TQS33MBD	2500	-	3
	25	105	25	105	10	3.5	2.8	1.1		1000	100	0.1	25.0	25TQS10MED	2500		
	35	105	35	105	6.8	3.5	2.8	1.1		900	150	0.1	23.8	35TQS6R8MHD	2500		

※1: Ripple current (100 kHz/ +45 °C)

※2: ESR (100 kHz/ +20 °C)

※3: tan δ (120 Hz/ +20 °C)

※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



SP-Cap

● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications	
Size code	B2	
Category temperature range	-55 °C to +105 °C	
Rated voltage range	16 V to 35 V	
Category voltage range	16 V to 35 V	
Rated capacitance range	3.9 μF to 33 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Surge voltage(V)	Rated voltage x1.15	
Endurance	+105 °C, 2000 h(16TQC33MYFB: 1000 h), rated voltage applied	
	Capacitance change	Within±20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage	
	Capacitance change	Within+40 %, -20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	≤ 3 times of the initial limit

**POSCAP**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up Selection guide

Series system diagram

Products list

TPG

TPSF

TPE

TPF

TQS

**TQC** Surface mount type

TA

TV

TH

TPB

TC

TDC

TPC

Catalog Deletion models

Catalog EOL models

● Marking and dimensions

(unit : mm)

Size code	L ±0.2	W ±0.2	H ±0.1	S ±0.2	W1 ±0.1
B2	3.5	2.8	1.9	0.8	2.2

R. voltage (V)	16	20	25	35
Code	C	D	E	V

R. cap. (μF)	3.9	5.6	8.2	10	15	22	33
Code	Q6	U6	Y6	A7	E7	J7	N7

**OS-CON**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

● Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C
TQC	16	105	16	105	10	3.5	2.8	1.9	B2	800	100	0.10	48.0	16TQC10M	2000	-	3
						3.5	2.8	1.9		1000	90	0.10	72.0	16TQC15M	2000		
						3.5	2.8	1.9		1000	90	0.10	35.2	16TQC22MYFB	2000		
						3.5	2.8	1.9		1000	90	0.10	158.4	16TQC33MYFB	2000		
	20	105	20	105	8.2	3.5	2.8	1.9		800	100	0.10	49.2	20TQC8R2M	2000		
						3.5	2.8	1.9		1000	90	0.10	132.0	20TQC22MYFB	2000		
						3.5	2.8	1.9		800	100	0.10	42.0	25TQC5R6M	2000		
										900	100	0.10	112.5	25TQC15MYFB	2000		
	35	105	35	105	3.9	3.5	2.8	1.9		500	400	0.10	40.9	35TQC3R9MYF	2000		

※1: Ripple current (100 kHz/ +105 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

※: Small order quantity (500 pcs/reel) is available with TQC series. Please contact our sales representative if you prefer it.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



High voltage (35 V max.) RoHS compliance, Halogen free

## Specifications

Items	Specifications			
Size code	D12	D15	D2	D3L
Category temperature range	-55 °C to +105 °C			
Rated voltage range	16 V	16 V to 25 V	16 V to 35 V	16 V to 25 V
Category voltage range	16 V	16 V to 25 V	16 V to 35 V	16 V to 25 V
Rated capacitance range	33 μF	22 μF to 47 μF	10 μF to 150 μF	68 μF to 150 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor (tan δ)	Please see the attached characteristics list			
Surge voltage (V)	Rated voltage x1.15			
Endurance	+105 °C, 2000 h, rated voltage applied			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 1.5 times of the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage			
	Capacitance change	Within +40 %, -20 % of the initial value		
	tan δ	≤ 1.5 times of the initial limit		
DC leakage current	≤ 3 times of the initial limit			

## Marking and dimensions

Size code	L ±0.2※1	W ±0.2	H ±0.1※2	S ±0.2	W1 ±0.1
D12	7.3	4.3	1.15	1.3	2.4
D15	7.3	4.3	1.4	1.3	2.4
D2	7.3	4.3	1.9	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4

※1 D3L size (±0.3) ※2 D12 size (±0.05), D3L size (±0.2)

R. voltage (V)	16	20	25	35
Code	C	D	1E	V

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life		
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C	
TQC	16	105	16	105	33	7.3	4.3	1.15	D12	1800	40	0.10	52.8	16TQC33MYFS	4500	-	3	
						7.3	4.3	1.9	D2	1400	70	0.10	52.8	16TQC33MYFD	3000			
		47	7.3	4.3		1.4	D15	1500	55	0.10	75.2	16TQC47MYFT	3000					
			7.3	4.3		1.9	D2	1800	40	0.10	75.2	16TQC47MW	3000					
		68	7.3	4.3	1.9	1450		55	0.10	75.2	16TQC47MYFD	3000						
			100	7.3	4.3	1.9	1500	50	0.10	108.8	16TQC68MYF	3000						
		150		7.3	4.3	1.9	1800	50	0.10	160.0	16TQC100MYF	3000						
			20	105	16	105	33	7.3	4.3	2.8	D3L	1800	50	0.10	240.0			16TQC150MYF
	7.3	4.3						1.9	D2	1500	70	0.15	240.0	1CTQC15173F1	3000			
	47	7.3		4.3	1.9	1400		60		0.10	66.0	20TQC33MYFD	3000					
		100		7.3	4.3	1.4		D15	1500	55	0.10	94.0	20TQC47MYFT	3000				
	150			7.3	4.3	1.9	D2	1250	100	0.15	200.0	20TQC100MD2	3000					
		200		7.3	4.3	2.8	D3L	1700	55	0.10	200.0	20TQC100MYF	2500					
	25			105	20	105	15	7.3	4.3	1.9	D2	1500	45	0.10	38.0			25TQC15MV
		7.3						4.3	1.9	1000		90	0.10	38.0	25TQC15MYFD			3000
		22	7.3	4.3	1.9	1500		45	0.10	55.0	25TQC22MYFD	3000						
			7.3	4.3	1.4	D15		1400	70	0.10	55.0	25TQC22MYFT	3000					
		33	7.3	4.3	1.9	D2	1400	60	0.10	82.5	25TQC33MYF	3000						
			68	7.3	4.3	2.8	D3L	1400	70	0.10	170.0	25TQC68MYF	2500					
		35	105	25	105	10	7.3	4.3	1.9	D2	1000	120	0.10	35.0	35TQC10M			3000
7.3							4.3	1.9	1000		120	0.10	35.0	35TQC10MYF	3000			
15	7.3		4.3	1.9	900		150	0.10	52.5	35TQC15MYF	3000							

※1: Ripple current (100 kHz/ +105 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes  
 ◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".  
 ◆Please refer to page 38 for floor life level.  
 ※: Small order quantity (500 pcs/reel) is available with TQC series. Please contact our sales representative if you prefer it.  
 Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
 Should a safety concern arise regarding this product, please be sure to contact us immediately.

**SP-Cap**  
 Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Catalog EOL models

**POSCAP**  
 Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Line-up  
 Series system diagram  
 Products list

- TPG
- TPSF
- TPE
- TPF
- TQS
- TQC**
- TA
- TV
- TH
- TPB
- TC
- TDC
- TPC

Catalog Deletion models  
 Catalog EOL models

**OS-CON**  
 Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

**Hybrid**  
 Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Radial lead type



Guaranteed at 85 °C85 %RH RoHS compliance, Halogen free

This product is not intended for use in any driving application or any other critical functions that affect passenger safety (e.g. Powertrain, ABS, Engine ECU, Airbag, etc.)  
If the intended use of TA/TV series products is for use in other automotive related applications, please contact our sales team. All requests are subject to approval.

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications		
	B2	D2E	D3L
Size code	B2	D2E	D3L
Category temperature range	-55 °C to +105 °C		
Rated voltage range	4 V to 10 V	2.5 V to 10 V	
Category voltage range	4 V to 10 V	2.5 V to 10 V	
Rated capacitance range	47 μF to 100 μF	68 μF to 470 μF	150 μF to 680 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)		
Leakage current	Please see the attached characteristics list		
Dissipation factor(tan δ)	Please see the attached characteristics list		
Surge voltage(V)	Rated voltage x1.15		
Endurance	+105 °C, 2000 h, (B2 size : 1000 h)rated voltage applied		
	Capacitance change	Within±20 % of the initial value	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	Within the initial limit	
Damp heat (Steady state)	+85 °C, 85 to 90 %RH, 500 h, rated voltage applied		
	Capacitance change	Within +50 %, -20 % of the initial value(2R5TAE470M(F), 2R5TAE330M(F, I), 2R5TAE220M(F, 9))	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	Within the initial limit	

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

Selection guide

Surface mount type

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Marking and dimensions

D2E, D3L Size

R. capacitance (μF)

Polarity marking (+)

Lot. No.

R. voltage code

B2 Size

R. capacitance code

Polarity marking (+)

Lot. No.

R. voltage code

Size code	L ±0.3 ※1	W ±0.2	H ±0.2 ※2	S ±0.2	W1 ±0.1
B2	3.5	2.8	1.9	0.8	2.2
D2E	7.3	4.3	1.8	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4

※1 ±0.2: B2 ※2 ±0.1: B2, D2E

R. voltage (V)	2.5	4.0	6.3	10.0
Code	e	g	j	A

B2 size

R. cap. (μF)	47	68	100
Code	S7	W7	A8

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life				
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C			
TA	2.5	105	2.5	105	220	7.3	4.3	1.8	D2E	3900	9	0.10	110.0	2R5TAE220M9	3000	3	3			
						7.3	4.3	1.8		3100	15	0.10	55.0	2R5TAE220MF	3000					
		7.3	4.3	1.8		2400	25	0.10		55.0	2R5TAE220M	3000								
		7.3	4.3	1.8		3100	15	0.10		82.5	2R5TAE330MF	3000								
		7.3	4.3	1.8	2800	18	0.10	82.5	2R5TAE330MI	3000										
		7.3	4.3	1.8	2400	25	0.10	82.5	2R5TAE330M	3000										
		7.3	4.3	1.8	3100	15	0.10	117.5	2R5TAE470MF	3000										
		7.3	4.3	1.8	2400	25	0.10	117.5	2R5TAE470M	3000										
		7.3	4.3	2.8	3100	15	0.10	170.0	2R5TAE680MFL	2500										
		7.3	4.3	2.8	2400	25	0.10	170.0	2R5TAE680ML	2500										
	4	105	4	105	100	3.5	2.8	1.9	B2	1100	70	0.08	40.0	4TAB100M	2000	3	3			
						7.3	4.3	1.8		2800	18	0.10	88.0	4TAE220MI	3000					
		7.3	4.3	1.8		2400	25	0.10		88.0	4TAE220M	3000								
		7.3	4.3	2.8		2800	18	0.10		188.0	4TAE470MIL	2500								
		7.3	4.3	2.8	2400	25	0.10	188.0	4TAE470ML	2500										
		6.3	105	6.3	105	47	3.5	2.8	1.9	B2	1100	70	0.08	29.6	6TAB47M			2000	3	3
							3.5	2.8	1.9		1100	70	0.08	42.8	6TAB68M			2000		
			7.3	4.3	1.8		2400	25	0.10		94.5	6TAE150M	3000							
			7.3	4.3	1.8		2800	18	0.10		138.6	6TAE220MI	3000							
			7.3	4.3	1.8	2400	25	0.10	138.6	6TAE220M	3000									
7.3	4.3		2.8	2400	25	0.10	207.9	6TAE330ML	2500											
10	105	10	105	47	3.5	2.8	1.9	B2	1100	70	0.08	47.0	10TAB47M	2000	3	3				
					7.3	4.3	1.8		2400	25	0.10	68.0	10TAE68M	3000						
	7.3	4.3	2.8		2400	25	0.10		150.0	10TAE150ML	2500									
	7.3	4.3	2.8		2400	25	0.10		220.0	10TAE220ML	2500									

※1: Ripple current (100 kHz/ +45 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes  
◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".  
◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



Guaranteed at 85 °C85 %RH    Guaranteed at 125 °C    RoHS compliance, Halogen free

This product is not intended for use in any driving application or any other critical functions that affect passenger safety (e.g. Powertrain, ABS, Engine ECU, Airbag, etc.)  
If the intended use of TA/TV series products is for use in other automotive related applications, please contact our sales team. All requests are subject to approval.

## Specifications

Items	Specifications	
Size code	D2E	D3L
Category temperature range	-55 °C to +125 °C	
Rated voltage range	6.3 V to 10 V	10 V
Category voltage range	4 V to 6.3 V	6.3 V
Rated capacitance range	68 μF to 150 μF	150 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Surge voltage(V)	Rated voltage x1.15	
Endurance	+125 °C, 1000 h, category voltage applied (105 °C 2000 h, rated voltage applied)	
	temp	125 °C
	Capacitance change	Within±20 % of the initial value
	tan δ	≤ 2 times of the initial limit
	DC leakage current	≤ 2 times of the initial limit
Damp heat (Steady state)	+85 °C, 85 % to 90 %, 500 h, rated voltage applied	
	Capacitance change	Within+40 %, -20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	Within the initial limit

## Marking and dimensions

Size code	L ±0.3	W ±0.2※1	H ±0.2	S ±0.2	W1 ±0.1
D2E	7.3	4.3	1.8	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4

※1 ±0.1 : D2E

R. voltage (V)	6.3	10.0
Code	j	A

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C
TV	6.3	105	4	125	150	7.3	4.3	1.8	D2E	2400	25	0.10	94.5	6TVE150M	3000	5	3
		105	6.3	125	68	7.3	4.3	1.8		2400	25	0.10	68.0	10TVE68M	3000		
	105	6.3	125	150	7.3	4.3	2.8	D3L	2400	25	0.10	150.0	10TVE150ML	2500			

※1: Ripple current (100 kHz/ +45 °C)

※2: ESR (100 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

- TPG
- TPSF
- TPE
- TPF
- TQS
- TQC
- TA
- TV**
- TH
- TPB
- TC
- TDC
- TPC

Catalog Deletion models

Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type





**SP-Cap**

**Specifications**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications			
	D2E	D2	D3L	D4
Size code	D2E	D2	D3L	D4
Category temperature range	-55 °C to +125 °C			
Rated voltage range	2.5 V to 6.3 V	2.5 V to 10 V	4 V to 6.3 V	6.3 V to 10 V
Category voltage range	1.6 V ~ 4 V	1.6 V to 6.3 V	2.5 V.DC to 4 V.DC	4 V to 6.3 V
Rated capacitance range	150 μF to 330 μF	68 μF to 220 μF	220 μF to 330 μF	220 μF to 470 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor(tan δ)	Please see the attached characteristics list			
Surge voltage(V)	Rated voltage x1.15			
Endurance	+125 °C, 1000 h, Category voltage applied			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 2 times of the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage			
	Capacitance change	Within+40 %, -20 % of the initial value		
	tan δ	≤ 1.5 times of the initial limit		
DC leakage current	≤ 2 times of the initial limit			
	≤ 3 times of the initial limit			

**POSCAP**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

TPG

TPSF

TPE

TPF

TQS

TQC

TA

TV

**TH**

TPB

TC

TDC

TPC

Surface mount type

Catalog Deletion models

Catalog EOL models

**Marking and dimensions**

**D2E, D3L Size**

**D2, D4 Size**

(unit : mm)

Size code	L ±0.3※1	W ±0.2	H ±0.1※2	S ±0.2	W1 ±0.1
D2E	7.3	4.3	1.8	1.3	2.4
D2	7.3	4.3	1.9	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

※1 ±0.2 : D2 ※2 ±0.2 : D3L, D4

R. voltage (V)	2.5	4.0	6.3	10.0
Code	e	g	j	A

**OS-CON**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

**Characteristics list**

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life			
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≦260°C	Reflow temp. ≦250°C		
THB	4	105	2.5	125	330	7.3	4.3	2.8	D3L	2000	40	0.10	132.0	4THB330ML	2500	-	5		
										2000	40	0.10	138.6	6THB220ML	2500				
	6.3	105	4	125	330	7.3	4.3	3.8		D4	3000	40	0.10	207.9	6THB330M			2000	
											3000	35	0.15	296.1	6THB470M			2000	
	10	105	6.3	125	220	7.3	4.3	3.8			D2	3000	40	0.10	220.0			10THB220M	2000
												3000	35	0.10	330.0			10THB330M	2000
THC	2.5	105	1.6	125	220	7.3	4.3	1.9	D2			1700	45	0.10	55.0			2R5THC220M	3000
												1900	40	0.10	94.5			6THC150M	3000
										1700		45	0.10	68.0	10THC68M			3000	
THE	2.5	105	1.6	125	330	7.3	4.3	1.8	D2E	3100		15	0.10	82.5	2R5THE330MF			3000	
										2800	18	0.10	82.5	2R5THE330MI	3000				
										2400	25	0.10	82.5	2R5THE330M	3000				
	4	105	2.5	125	220	7.3	4.3	1.8		3100	15	0.10	88.0	4THE220MF	3000				
										2800	18	0.10	88.0	4THE220MI	3000				
										2400	25	0.10	88.0	4THE220M	3000				
	6.3	105	4	125	150	7.3	4.3	1.8		D2E	2800	18	0.10	94.5	6THE150MI	3000			
											2400	25	0.10	94.5	6THE150M	3000			

※1: Ripple current (100 kHz/ +45 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.





Standard RoHS compliance, Halogen free

## Specifications

Items	Specifications		
	B2	D3L	D4
Size code	B2	D3L	D4
Category temperature range	-55 °C to +105 °C		
Rated voltage range	4 V to 10 V		6.3 V to 10 V
Category voltage range	4 V to 10 V		6.3 V to 10 V
Rated capacitance range	33 μF to 68 μF	150 μF to 330 μF	220 μF to 470 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)		
Leakage current	Please see the attached characteristics list		
Dissipation factor(tan δ)	Please see the attached characteristics list		
Surge voltage(V)	Rated voltage x1.15		
Endurance	+105 °C 2000 h, (B2 size:1000 h) rated voltage applied *Rated temp. 85 °C 1000 h rated voltage applied		
	Capacitance change	Within±20 % of the initial value	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	Within the initial limit	
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage		
	Capacitance change	Within+40 %, -20 % of the initial value	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	≤ 3 times of the initial limit	

## Marking and dimensions

**B2 Size**

**D3L Size**

**D4 Size**

(unit : mm)

Size code	L ±0.3※1	W ±0.2	H ±0.2※2	S ±0.2	W1 ±0.1
B2	3.5	2.8	1.9	0.8	2.2
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

※1 ±0.2:B2 ※2 ±0.1:B2

R. voltage (V)	4.0	6.3	10.0
Code	g	j	A

**B2 size**

R. cap. (μF)	33	47	68
Code	N7	S7	W7

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life		
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C	
TPB	4	105	4	105	68	3.5	2.8	1.9	B2	1100	70	0.08	27.2	4TPB68M	2000	3	3	
						7.3	4.3	2.8	D3L	2000	40	0.10	132.0	4TPB330ML	2500		2a	
	6.3	105	6.3	105	33	3.5	2.8	1.9	B2	1100	70	0.08	20.7	6TPB33M	2000		3	
						7.3	4.3	2.8	D3L	2000	40	0.10	138.6	6TPB220ML	2500			
		105	6.3	105	220	7.3	4.3	2.8	D3L	2000	40	0.10	207.9	6TPB330MAL	2500		2a	
						7.3	4.3	2.8	D3L	2000	40	0.10	207.9	6TPB330ML	2500			
		105	6.3	105	330	7.3	4.3	3.8	D4	3000	40	0.10	207.9	6TPB330M	2000			
						7.3	4.3	3.8	D4	3000	35	0.15	296.1	6TPB470M	2000			
		10	105	10	105	33	3.5	2.8	1.9	B2	1100	70	0.08	33.0	10TPB33M		2000	3
							7.3	4.3	2.8	D3L	2000	40	0.10	150.0	10TPB150ML		2500	
	105		10	105	47	3.5	2.8	1.9	B2	1100	70	0.08	47.0	10TPB47M	2000			
						7.3	4.3	2.8	D3L	2000	40	0.10	220.0	10TPB220ML	2500		2a	
	105		10	105	220	7.3	4.3	3.8	D4	3000	40	0.10	220.0	10TPB220M	2000			
						7.3	4.3	3.8	D4	3000	35	0.10	330.0	10TPB330M	2000			

※1:Ripple current (100 kHz/ +45 °C) ※2:ESR (100 kHz/+20 °C) ※3:tan δ (120 Hz/+20 °C) ※4:After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
**TPB**  
TC  
TDC  
TPC

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Guaranteed at 125°C 1000h

RoHS compliance, Halogen free

**SP-Cap**

**Specifications**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

**POSCAP**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up Selection guide

Series system diagram

Products list

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
**TC**  
TDC  
TPC

Surface mount type

Catalog Deletion models  
Catalog EOL models

**OS-CON**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

**Hybrid**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Items	Specifications		
	Size code	D2E	D3L
Category temperature range	-55 °C to +125 °C		
Rated voltage range	4 V to 6.3 V	2.5 V to 10 V	
Category voltage range	3.2 V to 5 V	2 V to 8 V	
Rated capacitance range	100 μF to 330 μF	150 μF to 680 μF	330 μF to 1000 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)		
Leakage current	Please see the attached characteristics list		
Dissipation factor(tan δ)	Please see the attached characteristics list		
Surge voltage(V)	Rated voltage x1.15		
Endurance	+125 °C, 1000 h, Category temperature range voltage applied		
	Capacitance change	Within±20 % of the initial value	
	tan δ	≤ 2 times of the initial limit	
	DC leakage current	≤ 2 times of the initial limit	
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage		
	Capacitance change	Within+50 %, -20 % of the initial value (ETCF1000M6H(5H))	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	≤ 3 times of the initial limit	

**Marking and dimensions**

(unit : mm)

Size code	L ±0.3	W ±0.2	H ±0.2※1	S ±0.2	W1 ±0.1
D2E	7.3	4.3	1.8	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

※1 ±0.1 : D2E

R. voltage (V)	2.5	4.0	6.3	10.0
Code	e	g	j	A

## ● Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life					
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≦260°C	Reflow temp. ≦250°C				
TCE	2.5	105	2	125	680	7.3	4.3	2.8	D3L	3500	12	0.10	170.0	ETCE680MCL	2500	3	2a				
		105	2	125		7.3	4.3	2.8		3100	15	0.10	170.0	ETCE680MFL	2500						
		105	2	125	1000	7.3	4.3	3.8	D4	3900	15	0.15	250.0	ETCE1000MF	2000						
	4	105	3.2	125	150	7.3	4.3	1.8	D2E	2800	18	0.10	60.0	4TCE150MI	3000						
										3100	15	0.10	88.0	4TCE220MF	3000						
			3.2	125	220	7.3	4.3	1.8		2800	18	0.10	88.0	4TCE220MI	3000						
										2400	25	0.10	88.0	4TCE220M	3000						
			3.2	125	330	7.3	4.3	1.8		2800	18	0.10	132.0	4TCE330MI	3000						
										2400	25	0.10	132.0	4TCE330M	3000						
		3.2	125	470	7.3	4.3	2.8	D3L	3500	12	0.10	188.0	4TCE470MCL	2500							
									3100	15	0.10	188.0	4TCE470MFL	2500							
		2800	18	0.10	188.0	4TCE470MIL	2500														
		2400	25	0.10	188.0	4TCE470ML	2500														
		5	105	5	125	100	7.3		4.3	1.8	D2E	2800	18	0.10	63.0			6TCE100MI	3000		
												2400	25	0.10	63.0			6TCE100M	3000		
	5		125	150	7.3	4.3	1.8	3100	15	0.10		94.5	6TCE150MF	3000							
								2800	18	0.10		94.5	6TCE150MI	3000							
	5		125	220	7.3	4.3	1.8	2400	25	0.10		94.5	6TCE150M	3000							
								2800	18	0.10		138.6	6TCE220MI	3000							
	5	105	5	125	330	7.3	4.3	2.8	D3L	3100	15	0.10	207.9	6TCE330MFL	2500						
										2800	18	0.10	207.9	6TCE330MIL	2500						
		2400	25	0.10	207.9	6TCE330ML	2500														
		5	125	470	7.3	4.3	3.8	3500		18	0.15	296.1	6TCE470MI	2000							
								3000		25	0.15	296.1	6TCE470M	2000							
5		125	680	7.3	4.3	3.8	3500	18		0.15	428.4	6TCE680MI	2000								
	3000						25	0.15	428.4	6TCE680M	2000										
6.3	105	5	125	220	7.3	4.3	1.8	D4	2800	18	0.10	138.6	6TCE220MI	3000							
									2400	25	0.10	138.6	6TCE220M	3000							
	5	125	330	7.3	4.3	2.8	3100		15	0.10	207.9	6TCE330MFL	2500								
							2800		18	0.10	207.9	6TCE330MIL	2500								
	5	125	470	7.3	4.3	3.8	3500		18	0.15	296.1	6TCE470MI	2000								
							3000		25	0.15	296.1	6TCE470M	2000								
10	105	8	125	220	7.3	4.3	2.8	D3L	2800	18	0.10	220.0	10TCE220MIL	2500							
									2400	25	0.10	220.0	10TCE220ML	2500							
	8	125	330	7.3	4.3	3.8	D4		3000	25	0.10	330.0	10TCE330M	2000							
							2800		18	0.10	220.0	10TCE220MIL	2500								
	8	125	470	7.3	4.3	3.8	2400		25	0.10	220.0	10TCE220ML	2500								
							3000		25	0.10	330.0	10TCE330M	2000								
TCF	2.5	105	2	125	680	7.3	4.3	2.8	D3L	4400	6	0.10	170.0	ETCF680M6L	2500	3	-				
										4400	7	0.10	170.0	ETCF680M7L	2500						
		2	125	1000		7.3	4.3	3.8		7.3	4.3	3.8	D4	4400	10			0.10	170.0	ETCF680ML	2500
														6100	5			0.10	170.0	ETCF680M5H	2000
		2	125	330		7.3	4.3	3.8		7.3	4.3	3.8		6100	5			0.10	250.0	ETCF1000M5H	2000
														5600	6			0.10	250.0	ETCF1000M6H	2000
	2	125	470	7.3	4.3	3.8	7.3	4.3	3.8	D3L	4000	12		0.10	132.0			4TCF330ML	2500		
											4400	10		0.10	188.0			4TCF470ML	2500		
	3.2	125	680	7.3	4.3	3.8	7.3	4.3	3.8		D4	4400	10	0.10	272.0			4TCF680MAH	2000		
											6100	5	0.10	138.6	6TCF220M5L			2500			
	3.2	125	220	7.3	4.3	2.8	7.3	4.3	2.8		D3L	4600	9	0.10	138.6			6TCF220M9L	2500		
												4000	12	0.10	138.6			6TCF220ML	2500		
	5	125	330	7.3	4.3	2.8	7.3	4.3	2.8	3900		9	0.10	207.9	6TCF330M9L			2500			
										4400		10	0.10	296.1	6TCF470MAH			2000			
	5	125	470	7.3	4.3	3.8	7.3	4.3	3.8	D4		4400	10	0.10	296.1			6TCF470MAH	2000		
										3600		15	0.10	150.0	10TCF150ML			2500			

- ※1: Ripple current (100 kHz/ +45 °C)
- ※2: ESR (100 kHz/+20 °C)
- ※3: tan δ (120 Hz/+20 °C)
- ※4: After 5 minutes
- ◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".
- ◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

- TPG
- TPSF
- TPE
- TPF
- TQS
- TQC
- TA
- TV
- TH
- TPB
- TC**
- TDC
- TPC

Catalog Deletion models  
Catalog EOL models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Guaranteed at 125°C 1000h

High voltage (25 V max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

Items	Specifications		
Size code	B2	D2	D3L
Category temperature range	-55 °C to +125 °C		
Rated voltage range	16 V to 25 V	16 V	16 V to 25 V
Category voltage range	12.8 V to 20 V	12.8 V	12.8 V to 20 V
Rated capacitance range	15 μF to 33 μF	100 μF	68 μF to 150 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)		
Leakage current	Please see the attached characteristics list		
Dissipation factor(tan δ)	Please see the attached characteristics list		
Surge voltage(V)	Rated voltage x1.15		
Endurance	+125 °C 1000 h, category voltage applied		
	Capacitance change	Within±20 % of the initial value	
	tan δ	≤ 2 times of the initial limit	
	DC leakage current	≤ 2 times of the initial limit	
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage		
	Capacitance change	Within+40 %, -20 % of the initial value	
	tan δ	≤ 1.5 times of the initial limit	
	DC leakage current	≤ 3 times of the initial limit	

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

Selection guide

Surface mount type

Catalog Deletion models  
Catalog EOL models

TPG  
TPSF  
TPE  
TPF  
TQS  
TQC  
TA  
TV  
TH  
TPB  
TC  
TDC  
TPC

## Marking and dimensions

R. capacitance code  
(D size : R. capacitance [μF])

Polarity marking (+)

R. voltage code

Lot. No.

(unit : mm)

Size code	L	W ±0.2	H	S ±0.2	W1 ±0.1
B2	3.5±0.2	2.8	1.9±0.1	0.8	2.2
D2	7.3±0.2	4.3	1.9±0.1	1.3	2.4
D3L	7.3±0.3	4.3	2.8±0.2	1.3	2.4

**B Size**

R. voltage (V)	16	20	25
記号	C	D	E

**D Size**

R. voltage (V)	16	20	25
記号	C	D	1E

**B Size** (unit : μF)

R. cap. (μF)	15	22	33
記号	E7	J7	N7

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C
TDC	16	105	12.8	125	33	3.5	2.8	1.9	B2	1000	90	0.10	158.4	16TDC33MYFB	2000	-	3
						7.3	4.3	1.9	D2	1800	50	0.10	160.0	16TDC100MYF	3000		
						7.3	4.3	2.8	D3L	1800	50	0.10	240.0	16TDC150MYF	2500		
	20	105	16	125	22	3.5	2.8	1.9	B2	1000	90	0.10	132.0	20TDC22MYFB	2000		
						7.3	4.3	2.8	D3L	1700	55	0.10	200.0	20TDC100MYF	2500		
						25	105	20	125	15	3.5	2.8	1.9	B2	900		
7.3	4.3	2.8	D3L	1400	70						0.10	170.0	25TDC68MYF	2500			

※1: Ripple current (100 kHz/ +105 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



Low profile (Height 1.1mm)

RoHS compliance, Halogen free

## Specifications

Items	Specifications	
Size code	B1	D2
Category temperature range	-55 °C to +105 °C	
Rated voltage range	6.3 V to 12.5 V	6.3 V to 10 V
Category voltage range	5 V to 10 V	6.3 V to 10 V
Rated capacitance range	10 μF to 47 μF	68 μF to 330 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Surge voltage (V)	Rated voltage x1.15	
Endurance	+105 °C 2000 h, (B1 size:1000 h) rated voltage applied *Rated temp. 85 °C 1000 h rated voltage applied	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 500 h, No-applied voltage	
	Capacitance change	Within +40 %, -20 % of the initial value
	tan δ	≤ 1.5 times of the initial limit
	DC leakage current	≤ 3 times of the initial limit

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

TPG
TPSF
TPE
TPF
TQS
TQC
TA
TV
TH
TPB
TC
TDC
<b>TPC</b>

Catalog Deletion models  
Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Marking and dimensions

**B1 Size**

**D2 Size**

(unit : mm)

Size code	L ±0.2	W ±0.2	H ±0.1	S ±0.2	W1 ±0.1
B1	3.5	2.8	1.1	0.8	2.2
D2	7.3	4.3	1.9	1.3	2.4

R. voltage (V)	6.3	8.0	10.0	12.5
Code	j	k	A	B

**B1 size**

R. cap. (μF)	10	15	22	33	47
Code	A7	E7	J7	N7	S7

## Characteristics list

Series	Rated voltage (V)	Rated temp. (°C)	Category voltage (V)	Category temp. (°C)	Rated capacitance (μF)	Case size (mm)			Size code	Specifications				Standard		Floor life	
						L	W	H		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	Reflow temp. ≤260°C	Reflow temp. ≤250°C
TPC	6.3	85	5	105	47	3.5	2.8	1.1	B1	1100	55	0.10	29.6	6TPC47M	3000	3	
										1000	70	0.10	29.6	6TPC47MB	3000		
		105	6.3	105	100	7.3	4.3	1.9	D2	1700	45	0.10	63.0	6TPC100M	3000		
										1900	40	0.10	94.5	6TPC150M	3000		
		85	5	105	330	7.3	4.3	1.9		1900	40	0.10	207.9	6TPC330MA	3000		
	8	85	6.3	105	22	3.5	2.8	1.1	B1	1000	70	0.10	17.6	8TPC22M	3000	3	
										1900	40	0.10	120.0	8TPC150M	3000		
		105	8	105	150	7.3	4.3	1.9	D2	1700	45	0.10	68.0	10TPC68M	3000		
	10	105	10	105	68	7.3	4.3	1.9	D2	1700	45	0.10	100	10TPC100M	3000	2a	
										1700	45	0.10	100	10TPC100M	3000		
12.5	85	10	105	10	3.5	2.8	1.1	B1	800	80	0.10	12.5	12TPC10M	3000	3		
									800	80	0.10	18.8	12TPC15M	3000			

※1: Ripple current (100 kHz/ +45 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 5 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

◆Please refer to page 38 for floor life level.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

# Catalog Deletion Models

The following table is a list of our items which have been deleted from our catalogs. If you are using any of the following models on the deleted list, please substitute them with the suggested alternative model as soon as possible. Our company continue to supply them to customers who have already used them, for the time being.

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

TPG

TPSF

TPE

TPF

TQS

TQC

TA

TV

TH

TPB

TC

TDC

TPC

Surface mount type

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Series	Size code	Models for deletion	Year of deletion	Alternative model	
TPB	B2	2R5TPB100M	2012	4TPE100MZB	
		2R5TPB220MA	2009	2R5TPE220MZB	
		4TPB100M	2009	4TPE100MZB	
		8TPB47M	2009	10TPB47M	
		6TPB47M	2009	6TPC47MB	
		6TPB100MA	2009	6TPE100MAZB	
	D3L	6TPB100MAV	2009	6TPE100MAZB	
			2R5TPB330ML	2009	2R5TPE330M
		4TPB220ML	2009	4TPE220M	
		4TPB470ML	2009	4TPE470ML	
		6TPB150ML	2009	6TPC150M	
		10TPB100ML	2010	10TPC100M	
		D3	4TPB220M	2008	4TPE220M
			6TPB150M	2008	6TPC150M
			10TPB100M	2008	10TPC100M
			D4	2R5TPB680M	2009
2R5TPB1000M	2009	2R5TPE1000MF			
4TPB470M	2009	4TPE470ML			
4TPB680M	2009	6TPE680MI			
TPC	B1	2R5TPC56M	2012	6TPB68M	
		4TPC47M	2012	6TPC47MB	
		6TPC33M	2012	6TPC47MB	
	D2	10TPC33MB	2013	12TPG33M	
		2R5TPC330M	2009	2R5TPE330M	
		4TPC150M	2009	4TPE150MI	
4TPC220M	2009	4TPE220M			
TPE	B2	2TPE330MIB	2011	2TPE330MFB	
		2TPE330MAFGB	2011	2TPE330MAFB	
		2R5TPE150MZB	2011	2R5TPE220MZB	
		2R5TPE220MIB	2012	2R5TPE220MFGB	
	D2E	4TPE150MUB	2013	4TPE150MAZB	
		2R5TPE220MC	2012	2R5TPE220M9	
		2R5TPE220M7	2012	2R5TPE330M7	
		2R5TPE470M	2011	2R5TPE470MI	
	D3L	4TPE150M	2011	4TPE150MI	
		2R5TPE680ML	2012	2R5TPE680MFL	
	D4	2R5TPE680ML	2011	2R5TPE680MFL	
		2R5TPE1000M	2011	2R5TPE1000MF	
2R5TPE1000MI		2012	2R5TPE1000MF		
4TPE680M		2011	6TPE680MI		
4TPE680MI		2012	6TPE680MI		
4TPE680MF		2012	4TPF680MAH		

Series	Size code	Models for deletion	Year of deletion	Alternative model
TPG	B1G	10TPG33M	2011	12TPG33M
TPSF	B2S	11TPSF62MAIG	2012	-
TH	D2	4THC220M	2013	4THE220M
	D3L	2R5THB330ML	2010	-
		10THB100ML	2010	-
	D4	4THB680M	2013	-
TQC	C	16TQC22M	2011	25TQC22MYFD
		20TQC15M	2011	25TQC15MYFD
		25TQC10M	2011	25TQC15MYFD
		16TQC33M	2012	16TQC33MYFD
	D2	16TQC47M	2012	16TQC47MYFD
		16TQC68MY	2012	16TQC68MYF
		20TQC22M	2012	25TQC22MYFD
		20TQC22MYFD	2015	25TQC22MYFD
		20TQC47MY	2012	20TQC47MYF
		25TQC15M	2012	25TQC15MYFD
		25TQC22M	2012	25TQC22MYFD
		16TQC68M	2012	16TQC68MYF
	D3L	20TQC47M	2012	20TQC47MYF
		25TQC33M	2012	25TQC33MYF
	D3	16TQC100M	2012	16TQC100MYF



# Catalog EOL Models

The following table is a list of the End-Of-Life (EOL) models. Sales of these items will end as soon as we run out of its stock. We would like to express our appreciation for your business over the years with these products and we hope the new, alternative parts will continue to serve your needs. Thank you very much.

Series	Size code	Models for deletion	Year of deletion	Alternative model	Series	Size code	Models for deletion	Year of deletion	Alternative model
TPA	C	6TPA47M	2012/9	10TPB47M	TPE	B2	2R5TPE220MPB	2012/9	2R5TPE220MLB
		10TPA33M	2012/9	10TPB33M			2R5TPE220MDGB	2013	2R5TPE220MFGB
	D3	4TPA220M	2012/9	4TPE220M		C2	2R5TPE330MFC2	2012/9	2R5TPE330MF
6TPA150M		2012/9	6TPC150M	2R5TPE330MIC2			2012/9	2R5TPE330MF	
10TPA100M		2012/9	10TPC100M	2R5TPE330MCC2			2012/9	2R5TPE330MC	
B2	4TPB100MV	2012/9	4TPE100MZB	2R5TPE330M9C2			2012/9	2R5TPE330M9	
	4TPB150MA	2012/9	4TPE150MAZB	4TPE220MFC2			2012/9	4TPE220MF	
	8TPB33M	2012/9	10TPB33M	4TPE220MIC2			2012/9	4TPE220MI	
TPB	C	2R5TPB220MC	2012/9	4TPE220MI		4TPE220MPC2	2012/9	4TPE220MI	
		4TPB150MC	2012/9	6TPE150M		6TPE150MIC2	2012/9	6TPE150MI	
		4TPB220MC	2012/9	4TPE220MI		6TPE150MPC2	2012/9	6TPE150M	
	D3L	6TPB100MC	2012/9	6TPG100MG		8TPE100MPC2	2012/9	10TPF150ML	
		6TPB150MC	2012/9	6TPE150M		2R5TPE330MFC	2012/9	2R5TPE330MF	
		8TPB82MC	2012/9	8TPE100MAZB		2R5TPE330MIC	2012/9	2R5TPE330MF	
		10TPB47MC	2012/9	10TPC68M		2R5TPE330MPC	2012/9	2R5TPE330MF	
	D3	10TPB68MC	2012/9	10TPC68M	4TPE220MIC	2012/9	4TPE220MI		
		10TPB220MC	2009/10	-	4TPE220MPC	2012/9	4TPE220MI		
		2R5TPB470ML	2012/9	2R5TPE470MI	6TPE150MPC	2012/9	6TPE150M		
TPC	C1	2R5TPB680ML	2012/9	2R5TPE680MFL	6TPE220MIC	2012/9	6TPE220MI		
		16TPB47ML	2003/6	16TQC47MYFD	6TPE220MPC	2012/9	6TPE220M		
		2R5TPB330M	2012/9	2R5TPE330M	10TPE150MGC	2012/9	10TPE220ML		
		16TPB47M	2003/6	16TQC47MYFD	10TPE180MGC	2012/9	10TPE220ML		
		2R5TPC82M	2012/9	-	2TPE330M6	2011	2TPF330M6		
	D2	4TPC56M	2012/9	-	2R5TPE330M7	2011	2R5TPE330M7		
		4TPC100M	2012/9	6TPG100MG	2TPE330M9	2011	2R5TPE330M9		
		6TPC68M	2012/9	6TPG100MG	2TPE470M6	2011	2R5TPF470M6L		
		6TPC100MC	2012/9	6TPG100MG	2TPE470M7	2011	2R5TPE470M7		
		8TPC33M	2012/9	12TPG33M	2TPE470M9	2011	2R5TPE470M9		
TPD	D4D	2R5TPC220M	2012/9	2R5TPE220M	D2E	2TPF470M6	2012/9	2R5TPF470M6L	
		16TPC33M	2003/6	16TQC33MYFD	D3L	4TPF470M5EL	2014	-	
		2R5TPD470M	2007/10	2R5TPF470ML		6TPF330M5EL	2014	-	
		2R5TPD470M5	2012/3	ETPF470M5H	TPG	4TPG150M	2012/9	6TPG150M	
		2R5TPD470M6	2012/3	2R5TPF470M6L	B1G	6TPG68MG	2012/9	6TPG100M	
	D4D	2R5TPD470M8	2007/10	2R5TPF470M7L	B15G	6TPG220MZG	2014	-	
		2R5TPD680M	2007/10	2R5TPF680ML	TPL	D2T	2R5TPL220MC	2012/9	-
		2R5TPD680M5	2012/3	ETPF680M5H			2R5TPL330M7	2011/7	-
		2R5TPD680M6	2012/3	2R5TPF680M6L			All models	2013	-
		2R5TPD680M8	2007/10	2R5TPF680M7L	D12T	All models	2013	-	
		2R5TPD1000M	2012/3	ETPF1000M6H	D15T	All models	2013	-	
		2R5TPD1000M8	2012/3	ETPF1000M6H	TPLF	D2T	2TPLF470M7	2012/9	-
		2R5TPD1000M6	2012/3	ETPF1000M6H			2TPLF560M6	2011/7	-
		2R5TPD1000M5	2012/3	ETPF1000M5H		All models	2013	-	
		4TPD330M	2007/10	4TPF330ML	TPSF	B2S	2TPSF270MC	2012/9	2TPSF270M9G
4TPD470M	2007/10	4TPF470ML	B1S	2TPSF270M9		2012/9	2TPSF270M9G		
4TPD680M	2012/3	4TPF680MAH	TH	D3L	ETPSF200M9ED	2014	-		
6TPD220M	2007/10	6TPF220ML		D4	2R5THB470ML	2012/9	6THB470M		
6TPD330M	2007/10	6TPF330M9L				2R5THB680M	2012/9	-	
6TPD470M	2012/3	6TPF470MAH		D4D	2R5THB1000M	2012/9	-		
10TPD150M	2007/10	10TPF150ML			2R5THD680M	2012/3	2R5TPF680M6L		
TPU	S08	2R5TPU22M	2012/9	-		4THD470M	2012/9	-	
		4TPU15M	2012/9	-		6THD330M	2012/3	6TPF330M9L	
		6TPU10M	2012/9	-	TR	TR series	-	TA series	
	S09	2R5TPU22MSI	2019/7	-	APA	D2A	APA series	2006/4	-
		2R5TPU47MSI	2019/7	-	APB	D1	APB series	2006/4	-
		ETPU100MSI	2019/7	-	APC	D2	APC series	2009/6	-
		4TPU15MSI	2011	-	APD	D1	APD series	2009/6	-
		4TPU33MSI	2011	-	TQC	B15	35TQC2R7MYF	2016	35TQS6R8MHD
		4TPU68MSI	2019/7	-	TPH	A09	ETPH100MHA	2019/7	-
		6TPU10MSI	2019/7	-			4TPH68MHA	2019/7	-
		6TPU22MSI	2019/7	-			6TPH47MHA	2019/7	-
	6TPU47MSI	2019/7	-	6TPH100MAEA			2019/7	-	
	S11	10TPU47MSI	2019/7	-		A14	ATPH33MAHA	2019/7	-
		2R5TPU47MSK	2012/9	-			ETPH220MABC	2019/7	-
		2R5TPU68MSK	2013	-		ETPH220MAZC	2019/7	-	
4TPU33MSK		2012/9	-		4TPH150MABC	2019/7	-		
4TPU47MSK		2013	-		6TPH100MABC	2019/7	-		
6TPU22MSK		2012/9	-						
6TPU33MSK		2013	-						
A09		2R5TPU100MAI	2019/7	-					
		4TPU68MAI	2019/7	-					
		6TPU47MAI	2019/7	-					
B09	10TPU33MAI	2019/7	-						
	4TPU68MBI	2012/9	-						
	6TPU47MBI	2012/9	-						
		6TPU150MBI	2019/7	-					
		8TPU33MBI	2012/9	-					

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

- TPG
- TPSF
- TPE
- TPF
- TQS
- TQC
- TA
- TV
- TH
- TPB
- TC
- TDC
- TPC

Catalog Deletion models

Catalog EOL models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid


Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



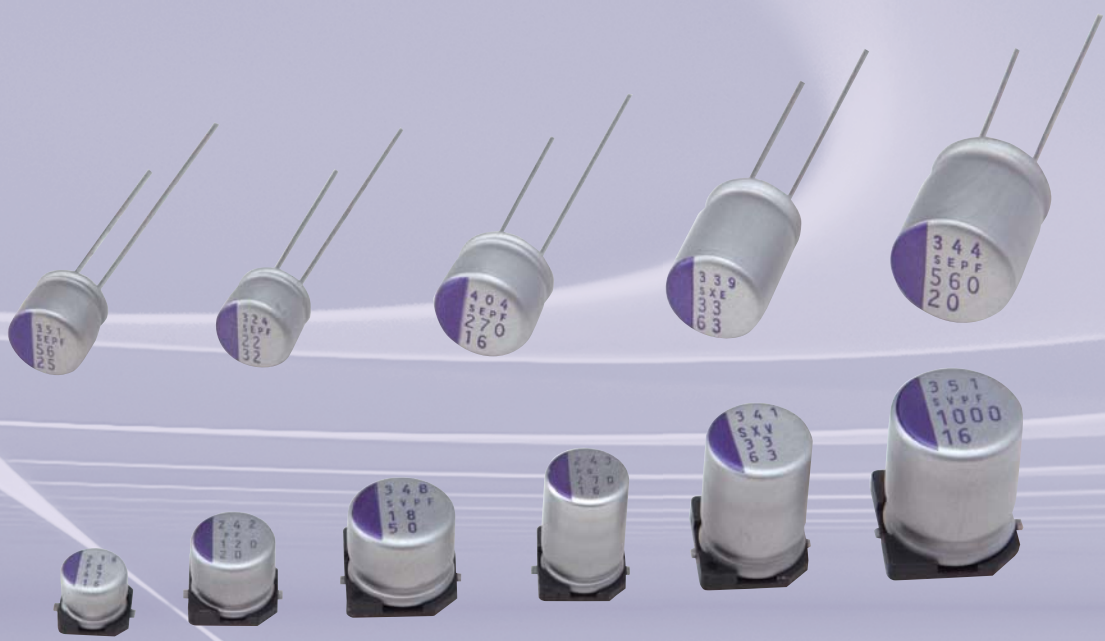

3000  
5  
1  
50V  
P  
DNC

324  
22  
22  
32

404  
370  
270  
16

3  
3  
3  
3  
3  
3  
3  
3

344  
560  
560  
20

3000  
5  
1  
50V  
P  
DNC

24  
120  
120  
D

348  
150  
150  
D

43  
75  
75  
D

341  
330  
330  
3

351  
1000  
1000  
16

Conductive Polymer Aluminum  
Solid Capacitors

# OS-CON™

SP-Cap™

## Applications

### Main market



Desktop computer



Audio / Visual



Server



Communications  
infrastructure



Industrial equipment



Industrial robot



Home appliance

POSCAP™

Selection guide	P69	Guidelines and Precautions
	P73	Mounting specifications Packing specifications
Surface mount type	P77	Line-up
	P79	Series system diagram
	P81	Products list
	P83	SVPT
	P85	SVF
	P87	SVPK
	P89	SXV
	P90	SVPG
	P91	SVPF
	P93	SVPA
	P95	SVPC
Radial lead type	P97	SVPB
	P98	SVPD
	P99	SVPS
	P101	SVPE
	P102	SVQP
	P103	SVP
	P105	SEK
	P106	SEF
P107	SEPG	
P108	SXE	
P109	SEPF	
P111	SEPC	
P113	SEQP	
P115	SEP	
P117	EOL Models	

Hybrid

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

Selection guide

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP  
SEK  
SEF  
SEPG  
SXE  
SEPF  
SEPC  
SEQP  
SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ⚠ Application Guidelines

### 1. Circuit design

#### 1-1 Prohibited circuits

- (a) Leakage current of the **OS-CON** may increase in the following conditions.
- (1) Soldering
  - (2) When voltage is not applied: high temperature no-load test, high temperature and high humidity no-load test, rapidly changing temperature test, etc.
- (b) Avoid the use of the **OS-CON** in the following type of circuits because leakage current may increase.
- (1) High-impedance circuits
  - (2) Coupling circuits
  - (3) Time constant circuits
  - (4) Other circuits that are significantly affected by leakage current
- ※ If you plan to use 2 or more **OS-CONs** in a series connection, please contact us before use

#### 1-2 Failure and life-span

The failure rate is 0.5 % /1000 h (Confidence level: 60 %) based on JIS C 5003.

The prospective failure is not zero. The mainly failure modes are as follows.

##### 1-2-1 Contingency failure

The most common failure mode is a short circuit. Mainly caused by the soldering or operating temperature environment, along with heat stresses, electrical stresses or mechanical stresses as follows.

- (1) Applying voltage over the rated voltage.
  - (2) Applying reverse voltage
  - (3) Excessive mechanical stress
  - (4) Applying rush current by sudden charge or discharge out of the specification.
- (a) The following phenomenon is seen when short-current is applied to the **OS-CON**.
- (1) When current is relatively low ( $\phi$  10: approx 1 A or less,  $\phi$  8: approx 0.5 A or less,  $\phi$  6.3: approx 0.2 A or less) The **OS-CON** becomes heated, but no effects are visible even when the current is continuously carried.
  - (2) When the short circuit currents exceed the mentioned value above.  
After internal temperature increase, sealing rubber may be turned over.  
In some cases, odorous gas may be produced.
  - (b) In case a short circuit occurs, ensure safety by fully considering the followings.
- (1) If odorous gas is released, turn off the main power of the equipment.  
In this case, keep your face and hands away from the area.
  - (2) Though it depends on the conditions, it takes seconds to minutes before odorant gas generates.  
Protective circuit should operate in this period.
  - (3) If the gas comes into eyes, rinse immediately. If the gas is inhaled, gargle immediately.
  - (4) Do not lick the electrolyte. If the electrolyte touches skin, wash it off with soap immediately.
  - (5) The **OS-CON** contains combustible substances. In case a large current continues to flow after a short circuit, in the worst case, the shorted-out section may ignite. For safety, install a redundant circuit or a protective circuit, etc.

##### 1-2-2 Wear-out failure (life time)


When life time span exceeded the specified guarantee time of endurance and damp heat, electrolyte might insulate and cause electric characteristic changed. This is called an open circuit. The electric characteristics of capacitance and ESR may possibly change within the specified range in specifications even if it is used under the condition of the rated voltage, electric and mechanical performance. Please note it when designing.

### 1-3 Leakage current

Mechanical stress may cause OS-CON's leakage current increased. In such a case, leakage current will gradually decrease by applying voltage (within the category voltage and the upper limit of category temperature). Then, self-healing speed of leakage current is faster when it is near to the upper limit of category temperature and the category voltage.


#### OS-CON

leakage current restoration characteristics  
16 V/10  $\mu$ F (16 V applied)

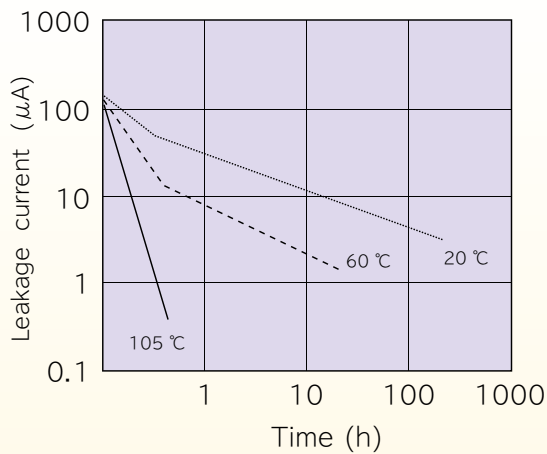

#### OS-CON

leakage current restoration characteristics  
10 V/33  $\mu$ F (Ambient temperature:65 °C)  
(Measured voltage:10 V)

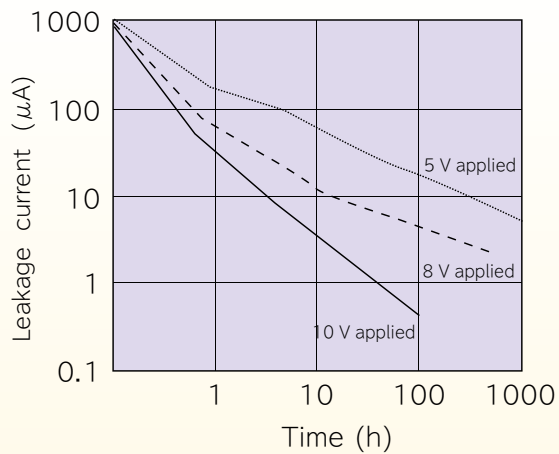

※To make the recovery of LC values easy to show, samples that LC values have been increased on purpose are used in the test.

### 1-4 Rapid charge and discharge limitation

Allowance of a large rush current to flow due to rapid charge and discharge may result in short circuit or large leakage current. The protection circuit, to maintain high reliability, is recommended when rush current to flow to the OS-CON is in the following cases.

- (a) Products which 10 times of allowable ripple current is less than 10 A: It is when 10 A or over of rush current is applied.
- (b) Products which 10 times of allowable ripple current is 10 A or over: It is when rush current, which the figure is over 10 times of allowable ripple current, is applied.

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP

SEK  
SEF  
SEPG  
SXE  
SEPF  
SEPC  
SEQP  
SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

# Guidelines and Precautions

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Selection guide

Products list

SVPT	Surface mount type
SVF	
SVPK	
SXV	
SVPG	
SVPF	
SVPA	
SVPC	
SVPB	
SVPD	
SVPS	
SVPE	
SVQP	
SVP	
SEK	
SEF	
SEPG	
SXE	
SEPF	
SEPC	
SEQP	
SEP	

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## 2.Mounting

### 2-1 Soldering with a soldering iron

- When lead terminals for radial lead type must be processed because the lead pitch and the PCB holes do not match, process them without any stresses to the **OS-CON** before soldering.
- Solder without any excessive stresses to the **OS-CON** itself.
- When the **OS-CON** has been soldered once and needs to be removed, remove it after the solder has been completely melted.
- Do not let the tip of the soldering iron touch (a) the **OS-CON** itself.

### 2-2 Flow soldering

- Do not apply flow soldering to **OS-CON** SMD type.
- Do not solder the **OS-CON** itself by submerging it in melted solder.
- Solder the opposite side that the **OS-CON** is mounted on.
- Note that flux does not adhere to anywhere expect the lead terminal.
- Note that other components do not fall over and touch the **OS-CON** when soldering.

### 2-3 Reflow soldering

- Do not apply reflow soldering to **OS-CON** Radial Lead type.
- Please contact us for setting VPS conditions.

### 2-4 Capacitor handling after soldering

Do not subject the **OS-CON** to excessive stress as follows.

- Do not tilt, bend or twist the **OS-CON**.
- Do not move the PCB with holding the **OS-CON** itself.
- Do not hit the **OS-CON** with objects.
- When stacking PCBs, make sure that the **OS-CON** does not touch other PCBs or components.

### 2-5 Circuit board cleaning

Check the following items before washing PC board with these detergents: high quality alcohol-based cleaning fluid such as Pine- $\alpha$  ST-100S, clean thru 750H, 750L, 710M, 750K or Techno Care FRW 14 through 17 or detergents including substitute freon as AK-225AES or IPA.

- Use immersion or ultrasonic waves to clean within 2 minutes.
- The temperature of the cleaning fluid should be less than 60 °C.
- Watch the contamination of the detergent (a) such as conductivity, pH, specific gravity, water content, etc.
- Do not store the **OS-CON** in a location subject to gases from the cleaning fluid or in an airtight container after cleaning.
- Dry the PCB or **OS-CON** with hot air that should be less than the upper category temperature.
- Please note that indication may disappear when rubbing print side after washing depending on a cleaner.
- Please contact us for details about detergents, cleaning methods and detergents other than those listed above.

### 2-6 Fixatives and coating materials

- Select the appropriate covering and sealant materials for the **OS-CON**. In particular, don't use acetone in the fixative, coating agent and diluent.
- Before applying the fixative or coating, completely remove any flux residue and foreign matter from the area where the board and the **OS-CON** will be jointed together.
- Allow any detergent to dry before applying the fixative or coating.
- Please contact us for the fixative and coating heat curing conditions.

### 2-7 Capacitor insulation

Be sure to completely separate the case, negative lead terminal, positive lead terminal and PC board patterns with each other due to the following reasons.

- Insulation is not guaranteed at a part of resin on the surface of a case.
- It offers inconstant resistance between a case and a negative lead terminal and it isn't insulated.

### 3.Storage

Open the bags just before mounting and use up all products once opened,  
For keeping a good solderability, store the **OS-CON** as follows.

※ Due to the feature of the plating material of the lead terminal, it may rarely become dull color during the specified period as follow, but it will not affect the solderability.

		Before unsealing	After unsealing
SMD type※1		Within 24 months after shipment	Within 30 days from opening (packaged with carrier tape)
Radial lead type	Bag packing product	Within 30 months after shipment	Within 7 days from opening
	Taping product	Within 24 months after shipment	

※1 The JEDEC J-STD-020 standard is not applicable

### Intellectual property right

We, Panasonic Group are providing the product and service that customers can use without anxiety, and are working positively on the protection of our products under intellectual property rights.  
Representative patents relating to **OS-CON** are as follows:

US Patent No. 6508846, 7158367

#### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

#### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

#### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram

Products list

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP

SEK  
SEF  
SEPG  
SXE  
SEPF  
SEPC  
SEQP  
SEP

Catalog EOL models

#### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



# Mounting specifications

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

- |      |                          |
|------|--------------------------|
| SVPT | Surface<br>mount<br>type |
| SVF  |                          |
| SVPK |                          |
| SXV  |                          |
| SVPG |                          |
| SVPF |                          |
| SVPA |                          |
| SVPC |                          |
| SVPB |                          |
| SVPD |                          |
| SVPS | Radial<br>lead<br>type   |
| SVPE |                          |
| SVQP |                          |
| SVP  |                          |
| SEK  |                          |
| SEF  |                          |
| SEPG |                          |
| SXE  |                          |
| SEPF |                          |
| SEPC |                          |
| SEQP |                          |
| SEP  |                          |

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide


Surface mount type

Radial lead type

### Recommendable reflow soldering


#### Peak temperature 250 °C lead free reflow soldering profile

The cycles of reflow soldering: 2 max.

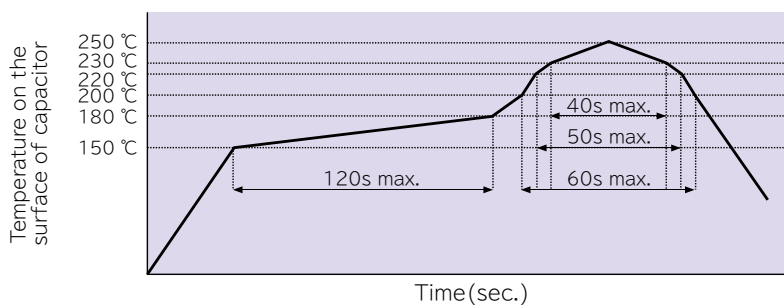

#### Peak temperature 260 °C lead free reflow soldering profile

The cycles of reflow soldering: 1 max.

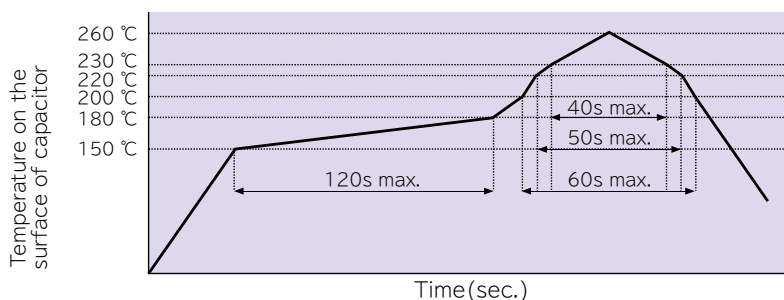

#### Soldering with a soldering iron

Tip of a soldering iron: 400±10 °C  
Working time: 5 sec. max


#### Flow soldering

	Temperature	Time	Flow number
Preheating	120 °C or less (ambient temperature)	120 sec. or less	1 time
Soldering condition	260 °C + 5 °C or less	10 + 1 sec. or less	2 times or less ※1

※1. When soldering 2 times, total immersion time should be 10 + 1 sec. or less.



## Land/Pad Pattern

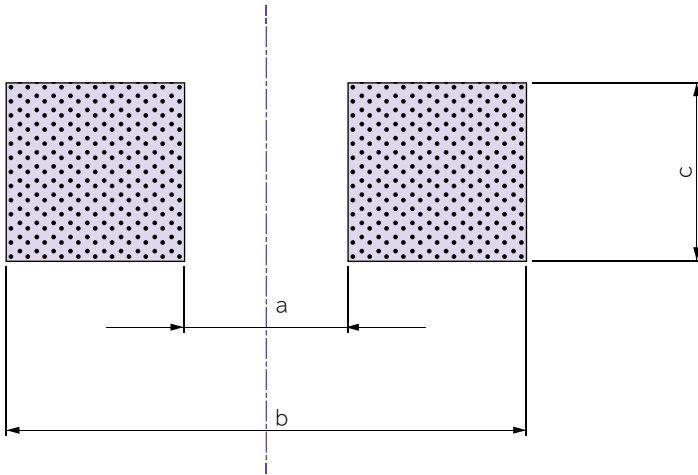

(unit : mm)

Size code	a	b	c
A5	1.0	6.2	1.6
B45	1.4	7.4	1.6
B6	1.4	7.4	1.6
C5	2.1	9.1	1.6
C55	2.1	9.1	1.6
C6	2.1	9.1	1.6
C65	2.1	9.1	1.6
C8	2.1	9.1	1.6
C10	2.1	9.1	1.6
C10L	2.1	9.1	2.5
E7	2.8	11.1	1.9
E10	2.8	11.1	1.9
E12	2.8	11.1	1.9
F8	4.3	13.1	1.9
F10	4.3	13.1	1.9
F12	4.3	13.1	1.9

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram

Products list

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP  
SEK  
SEF  
SEPG  
SXE  
SEPF  
SEPC  
SEQP  
SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

# Packing specifications

## SP-Cap

### ■ Surface mount type

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications


Selection guide

Surface mount type

Radial lead type

### 1. Taping


#### 1-1. Carrier tape

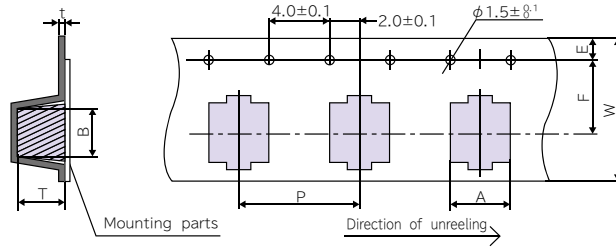

(unit : mm)

Size code	Dimension	A±0.2	B±0.2	W±0.3	F±0.1	E±0.1	P±0.1	t±0.1	T±0.2
A5		4.7	4.7	12.0	5.5	1.75	8.0	0.4	5.8
B45		5.6	5.6	16.0	7.5	1.75	8.0	0.4	4.8
B6		5.6	5.6	16.0	7.5	1.75	8.0	0.4	6.2
C5		6.9	6.9	16.0	7.5	1.75	12.0	0.4	5.3
C55		6.9	6.9	16.0	7.5	1.75	12.0	0.4	6.2
C6		6.9	6.9	16.0	7.5	1.75	12.0	0.4	6.2
C65		6.9	6.9	16.0	7.5	1.75	12.0	0.4	6.7
C8		7.0	7.0	16.0	7.5	1.75	12.0	0.5	8.2
C10		7.0	7.0	24.0	11.5	1.75	16.0	0.5	10.5
C10L		7.0	7.0	16.0	7.5	1.75	12.0	0.5	11.0
E7		8.6	8.6	24.0	11.5	1.75	12.0	0.4	7.2
E10		8.6	8.6	24.0	11.5	1.75	16.0	0.5	11.0
E12		8.6	8.6	24.0	11.5	1.75	16.0	0.5	12.3
F8		10.7	10.7	24.0	11.5	1.75	16.0	0.4	8.2
F10		10.7	10.7	24.0	11.5	1.75	16.0	0.4	11.0
F12		10.7	10.7	24.0	11.5	1.75	16.0	0.4	13.0


#### 1-2. Reel

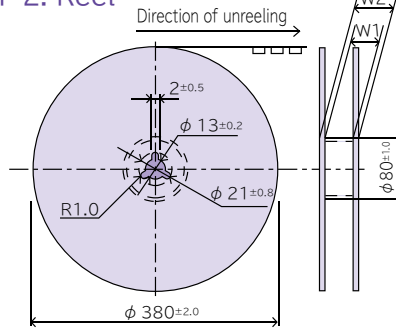

(Unit : mm)

Size code	W1±0.5	W2±1.0
A5	13.0	17.5
B45, B6, C5, C55, C6, C65, C8, C10L	17.0	21.5
C10, E7, E10, E12, F8, F10, F12	25.0	29.5

#### 1-3. Polarity



### 2. Minimum packing quantity and weight

Size code	Quantity(pcs./Reel, φ 380)	Typical weight(g)
A5	2000	700
B45	2500	900
B6	1500	800
C5	1300	800
C55	1000	800
C6	1000	800
C65	1000	800
C8	900	800
C10	500	700
C10L	700	900
E7	1000	1100
E10	500	900
E12	400	800
F8	500	1000
F10	500	1000
F12	400	1000

## Specifications for radial lead type


### 1. Lead terminal process

#### 1-1. Applications




※ The following table is a standard specification. Please contact us separately concerning specifications except for that mentioned below.  
Because of a limit on the length of a model name, the part of process name changes to +S from +TSS, +D from +TS, +3 from +C3. Please contact us for details.

Series	Size code	Bag-packed products (lead terminal cutting)		Taping
		Not processed	Straight cut	
SEP, SEQP, SEPC, SEPF, SXE, SEPG, SEK, SEF	B9, C55, C6, C9, C10, E7, E9, E12	○	+C3	+TSS (+S)
	E13	○	+C3	+TS (+D)
	F8, F13	○	+C3	+T

#### 1-2. Lead terminal cutting

Lead terminal cutting code	Process names	Size code (φD)	Dimensions (unit : mm)										
+C3 (+3)	Straight cut	B9 (φ 5)	 <table border="1" style="margin-left: 20px;"> <tr> <td>C3</td> </tr> <tr> <td>L 3.5</td> </tr> </table>	C3	L 3.5								
		C3											
L 3.5													
C55, C6, C9, C10 (φ 6.3)	E7, E9, E12, E13 (φ 8)	F8, F13 (φ 10)											
			<table border="1"> <tr> <th>Size code</th> <th>B9</th> <th>C55, C6, C9, C10</th> <th>E7, E9, E12, E13</th> <th>F8, F13</th> </tr> <tr> <td>F</td> <td>2.0</td> <td>2.5</td> <td>3.5</td> <td>5.0</td> </tr> </table>	Size code	B9	C55, C6, C9, C10	E7, E9, E12, E13	F8, F13	F	2.0	2.5	3.5	5.0
Size code	B9	C55, C6, C9, C10	E7, E9, E12, E13	F8, F13									
F	2.0	2.5	3.5	5.0									

#### 1-3. Lead terminal taping

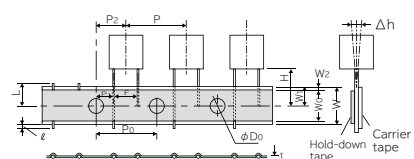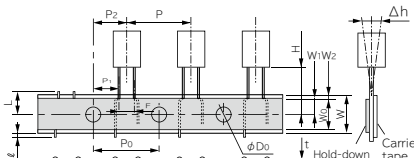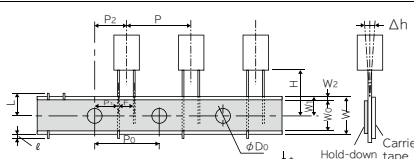Taping code	F	Size code (φD)	Taping
+T	F=5.0 mm	F8, F13 (φ 10)	
+TS (+D)	F=3.5 mm	E13 (φ 8)	
+TSS (+S)	F=2.0 mm F=2.5 mm F=3.5 mm	B9 (φ 5) C55, C6, C9, C10 (φ 6.3) E7, E9, E12 (φ 8)	

(unit : mm)

Code	F	P	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	Δh	W	W <sub>0</sub>	W <sub>1</sub>	W <sub>2</sub>	H	φD <sub>0</sub>	t	ℓ	L	
Tolerance		$\begin{smallmatrix} +0.8 \\ -0.2 \end{smallmatrix}$	±1.0	±0.2	±0.5	±1.0	±0.5	min.	±0.5	max	±0.75	±0.2	±0.3	max	max	
+T	φ 10	5.0	12.7	12.7	3.85	6.35	0	18.0	9.5	9.0	2.5	18.5	4.0	0.6	0	11.0
+TS (+D)	φ 8	3.5	12.7	12.7	4.60	6.35	0	18.0	9.5	9.0	2.5	17.5	4.0	0.6	0	11.0
+TSS (+S)	φ 5	2.0	12.7	12.7	5.35	6.35	0	18.0	9.5	9.0	2.5	17.5	4.0	0.6	0	11.0
	φ 6.3	2.5	12.7	12.7	5.10	6.35	0	18.0	9.5	9.0	2.5	17.5	4.0	0.6	0	11.0
	φ 8	3.5	12.7	12.7	4.60	6.35	0	18.0	9.5	9.0	2.5	17.5	4.0	0.6	0	11.0

### 2. Minimum packing quantity and weight

Size code	Case size	Processed type discrete lead terminals		Zig-zag pack taping type		Size code	Case size	Processed type discrete lead terminals		Zig-zag pack taping type	
		Quantity (pcs./Bag)	Typical weight (g)	Quantity (pcs./Box)	Typical weight (g)			Quantity (pcs./Bag)	Typical weight (g)	Quantity (pcs./Box)	Typical weight (g)
B9	φ 5	500	180	2000	1000	E9	φ 8	200	130	1000	900
C55	φ 6.3	500	150	1500	650	E12	φ 8	200	200	1000	980
C6	φ 6.3	500	160	1500	700	E13	φ 8	200	160	1000	1060
C9	φ 6.3	500	240	1500	1000	F8	φ 10	200	180	500	890
C10	φ 6.3	500	260	1500	1100	F13	φ 10	200	280	500	940
E7	φ 8	200	110	1000	820						

# Line-up

## SP-Cap

## SMD type

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Series	Page	Features	Small size/Low profile	Large capacitance	Low ESR	High voltage	Long life/High reliability	Category temperature range (°C)	Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Marking color	Size code	Size (mm)	
														φD	L
SVPT	83 to 84	Low ESR Large capacitance 105°C 20000h	●	●	●	●		-55 to 105	2.5 to 16	15 to 24	100 to 560	Purple	C65	6.3	6.4
SVF	85 to 86	High voltage Large capacitance 125 °C 1000 h	●	●	●	●		-55 to 125	16 to 25	27 to 40	27 to 82	Purple	B6	5.0	5.9
								-55 to 125	16 to 50	22 to 40	10 to 180	Purple	C6	6.3	5.9
								-55 to 125	16 to 50	22 to 35	18 to 270	Purple	E7	8.0	6.9
								-55 to 125	16 to 50	14 to 25	39 to 560	Purple	E12	8.0	11.9
								-55 to 125	16	16	1000	Purple	F10	10.0	10.0
SVPK	87 to 88	High voltage Large capacitance 125 °C 1000 h	●	●	●	●		-55 to 125	16 to 50	27 to 80	10 to 100	Purple	B6	5.0	5.9
								-55 to 125	16 to 50	22 to 35	22 to 220	Purple	C6	6.3	5.9
								-55 to 125	16 to 50	22 to 35	33 to 330	Purple	E7	8.0	6.9
								-55 to 125	16 to 50	14 to 5	68 to 680	Purple	E12	8.0	11.9
								-55 to 125	16 to 50	12 to 20	120 to 1200	Purple	F12	10.0	12.6
SXV	89	Super high voltage 125 °C 1000 h	●	●	●	●		-55 to 125	63 to 100	60	6.8 to 18	Purple	E7	8.0	6.9
								-55 to 125	63 to 100	50 to 60	15 to 39	Purple	F8	10.0	7.9
								-55 to 125	63 to 100	25 to 40	15 to 56	Purple	E12	8.0	11.9
								-55 to 125	63 to 100	25 to 30	18 to 100	Purple	F12	10.0	12.6
SVPG	90	Low ESR High ripple current 105 °C 5000 h	●	●	●	●		-55 to 105	16~25	25 to 30	15 to 47	Purple	B45	5.0	4.4
								-55 to 105	16	10	270	Purple	C8	6.3	7.9
								-55 to 105	16	8	270	Purple	C10	6.3	9.9
								-55 to 105	16	6.5	330	Purple	C10L	6.3	10.4
SVPF	91 to 92	High voltage Large capacitance 105 °C 5000 h	●	●	●	●		-55 to 105	16 to 25	27 to 40	27 to 82	Purple	B6	5.0	5.9
								-55 to 105	16 to 50	22 to 40	10 to 180	Purple	C6	6.3	5.9
								-55 to 105	16 to 50	22 to 35	18 to 270	Purple	E7	8.0	6.9
								-55 to 105	16	18	560	Purple	E10	8.0	10.0
								-55 to 105	16 to 50	14 to 25	39 to 560	Purple	E12	8.0	11.9
								-55 to 105	16	16	1000	Purple	F10	10.0	10.0
SVPA	93 to 94	Low ESR High ripple current	●	●	●	●		-55 to 105	2.5 to 20	30 to 40	10 to 82	Purple	B6	5.0	5.9
								-55 to 105	2.5 to 20	20 to 35	22 to 180	Purple	C6	6.3	5.9
								-55 to 105	2.5 to 20	20 to 33	47 to 330	Purple	E7	8.0	6.9
								-55 to 105	2.5 to 16	19 to 29	180 to 820	Purple	F8	10.0	7.9
								-55 to 105	2.5 to 16	19 to 35	39 to 180	Purple	B6	5.0	5.9
SVPC	95 to 96	Low ESR Large capacitance	●	●	●	●		-55 to 105	2.5 to 16	15 to 30	68 to 560	Purple	C6	6.3	5.9
								-55 to 105	2.5 to 16	19 to 27	120 to 680	Purple	E7	8.0	6.9
								-55 to 105	2.5~ to 16	9 to 16	270 to 1500	Purple	E12	8.0	11.9
								-55 to 105	2.5	12	2700	Purple	F12	10.0	12.6
								-55 to 105	2.5 to 20	40 to 45	15 to 120	Purple	C5	6.3	4.9
SVPB	97	Low profile	●	●	●	●		-55 to 105	20	35	22	Purple	C55	6.3	5.4
								-55 to 105	2.5 to 20	45 to 65	10 to 56	Purple	C6	6.3	5.9
								-55 to 105	16 to 35	40 to 70	8.2 to 82	Purple	E7	8.0	6.9
								-55 to 105	25 to 35	45 to 60	18 to 39	Purple	F8	10.0	7.9
SVPD	98	Guaranteed at 125 °C High voltage 85 °C 85 % RH	●	●	●	●		-55 to 125	25 to 35	30 to 50	22 to 47	Purple	E12	8.0	11.9
								-55 to 125	25 to 35	28 to 30	47 to 82	Purple	F12	10.0	12.6
								-55 to 105	4.0 to 10	200 to 220	10 to 33	Purple	A5	4.0	5.4
								-55 to 105	4.0 to 16	30 to 90	22 to 68	Purple	B6	5.0	5.9
SVPS	99 to 100	Long life	●	●	●	●		-55 to 105	4.0 to 20	22 to 60	22 to 150	Purple	C6	6.3	5.9
								-55 to 105	4.0 to 25	22 to 60	10 to 270	Purple	E7	8.0	6.9
								-55 to 105	4.0 to 16	20 to 35	100 to 680	Purple	F8	10.0	7.9
								-55 to 105	4.0 to 16	20 to 35	100 to 680	Purple	F8	10.0	7.9
SVPE	101	Super low ESR Large capacitance	●	●	●	●		-55 to 105	2.5 to 6.3	10 to 15	150 to 390	Purple	B6	5.0	5.9
								-55 to 105	2.5 to 10	10 to 20	220 to 390	Purple	C6	6.3	5.9
								-55 to 105	2.0 to 16	8 to 11	180 to 1200	Purple	C10	6.3	9.9
								-55 to 105	16	10	470	Purple	F12	10.0	12.6
SVQP	102	Guaranteed at 125 °C	●	●	●	●		-55 to 125	4.0 to 20	40 to 60	22 to 150	Purple	C6	6.3	5.9
								-55 to 125	6.3 to 20	35 to 45	47 to 220	Purple	E7	8.0	6.9

## SMD type

Series	Page	Features	Small size/Low profile	Large capacitance	Low ESR	High voltage	Long life/high reliability	Category temperature range (°C)	Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Marking color	Size code	Size (mm)	
														φD	L
SVP	103 to 104	Standard						-55 to 105	4.0 to 16	200 to 260	3.3 to 33	Purple	A5	4.0	5.4
								-55 to 105	4.0 to 20	60 to 120	10 to 68	Purple	B6	5.0	5.9
								-55 to 105	2.5 to 20	23 to 60	22 to 220	Purple	C6	6.3	5.9
								-55 to 105	4.0 to 20	35 to 45	33 to 330	Purple	E7	8.0	6.9
								-55 to 105	4.0 to 20	25 to 40	56 to 680	Purple	F8	10.0	7.9
								-55 to 105	2.5 to 20	13 to 24	100 to 680	Purple	E12	8.0	11.9
							-55 to 105	2.5 to 20	12 to 20	150 to 1500	Purple	F12	10.0	12.6	

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Series system diagram  
Products list

- Line-up
- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Radial lead type

Series	Page	Features	Small size/Low profile	Large capacitance	Low ESR	High voltage	Long life/high reliability	Category temperature range (°C)	Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Marking color	Size code	Size (mm)	
														φD	L
SEK	105	High voltage Large capacitance 125 °C 1000 h		●		●	●	-55 to 125	25 to 50	25 to 35	22 to 82	Purple	C6	6.3	5.9
								-55 to 125	25 to 50	24 to 35	33 to 120	Purple	E7	8.0	6.9
								-55 to 125	25 to 50	16 to 25	68 to 270	Purple	E12	8.0	11.9
								-55 to 125	25 to 50	14 to 20	120 to 470	Purple	F13	10.0	12.9
SEF	106	High voltage Large capacitance 125 °C 1000 h		●		●	●	-55 to 125	16 to 35	22 to 35	22 to 180	Purple	C6	6.3	5.9
								-55 to 125	16 to 35	22 to 30	39 to 270	Purple	E7	8.0	6.9
								-55 to 125	16 to 35	14 to 20	82 to 560	Purple	E12	8.0	11.9
								-55 to 125	16 to 35	12 to 18	120 to 1000	Purple	F13	10.0	12.9
SEPG	107	Low ESR High ripple current 105 °C 5000 h			●	●		-55 to 105	16	10	270	Purple	C9	6.3	8.9
								-55 to 105	16	8	270	Purple	C10	6.3	9.9
								-55 to 105	16	8	470	Purple	E9	8.0	8.9
								-55 to 105	16	8	560	Purple	E13	8.0	12.9
SXE	108	Super high voltage 125 °C 1000 h				●	●	-55 to 125	63 to 100	60	6.8 to 18	Purple	E7	8.0	6.9
								-55 to 125	63 to 100	50 to 60	15 to 39	Purple	F8	10.0	7.9
								-55 to 125	63 to 100	25 to 40	15 to 56	Purple	E12	8.0	11.9
								-55 to 125	63 to 100	25 to 30	18 to 100	Purple	F13	10.0	12.9
SEPF	109 to 110	Small size / Low profile High voltage Large capacitance 105 °C 5000 h	●	●		●	●	-55 to 105	16 to 32	30 to 35	22 to 150	Purple	C55	6.3	5.4
								-55 to 105	16 to 35	22 to 35	22 to 180	Purple	C6	6.3	5.9
								-55 to 105	16 to 35	22 to 30	39 to 270	Purple	E7	8.0	6.9
								-55 to 105	16 to 35	14 to 20	82 to 560	Purple	E12	8.0	11.9
SEPC	111 to 112	Super low ESR Large capacitance Small size / Low profile 105 °C 5000 h	●	●	●	●		-55 to 105	2.5	7	100 to 560	Purple	B9	5.0	8.9
								-55 to 105	6.3	18	220	Purple	C55	6.3	5.4
								-55 to 105	2.5 to 16	10 to 24	100 to 560	Purple	C6	6.3	5.9
								-55 to 105	2.5 to 16	7 to 10	100 to 820	Purple	C9	6.3	8.9
								-55 to 105	2.5 to 16	8 to 22	150 to 1000	Purple	E7	8.0	6.9
								-55 to 105	2.5 to 16	5 to 10	180 to 1000	Purple	E9	8.0	8.9
								-55 to 105	16	11 to 16	180 to 270	Purple	E12	8.0	11.9
								-55 to 105	2.5 to 6.3	7 to 8	470 to 820	Purple	E13	8.0	12.9
SEQP	113 to 114	Guaranteed at 125 °C R. voltage 32 V max.				●	●	-55 to 125	4.0 to 20	40 to 60	22 to 150	Purple	C6	6.3	5.9
								-55 to 125	4.0 to 32	35 to 100	6.8 to 330	Purple	E7	8.0	6.9
								-55 to 125	4.0 to 32	25 to 80	15 to 680	Purple	F8	10.0	7.9
								-55 to 125	4.0 to 32	13 to 50	18 to 560	Purple	E12	8.0	11.9
SEP	115 to 116	Standard						-55 to 105	4.0 to 20	40 to 60	22 to 150	Purple	C6	6.3	5.9
								-55 to 105	4.0 to 20	35 to 45	33 to 330	Purple	E7	8.0	6.9
								-55 to 105	4.0 to 20	25 to 40	56 to 680	Purple	F8	10.0	7.9
								-55 to 105	2.5 to 20	13 to 24	100 to 680	Purple	E12	8.0	11.9
								-55 to 105	2.5 to 20	12 to 20	150 to 1500	Purple	F13	10.0	12.9

# Series system diagram

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

## Hybrid



Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide


Surface mount type

Radial lead type

### SMD type

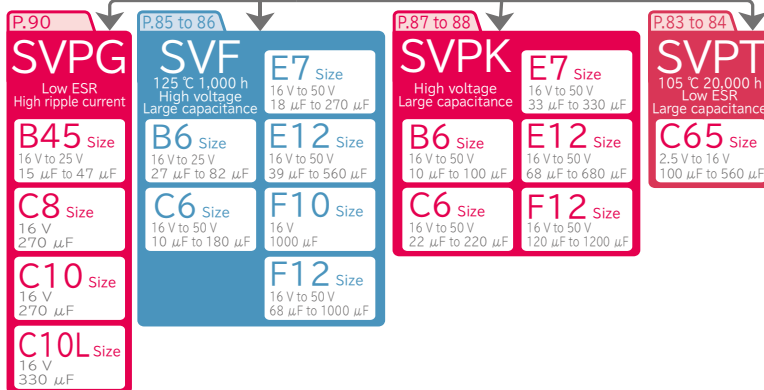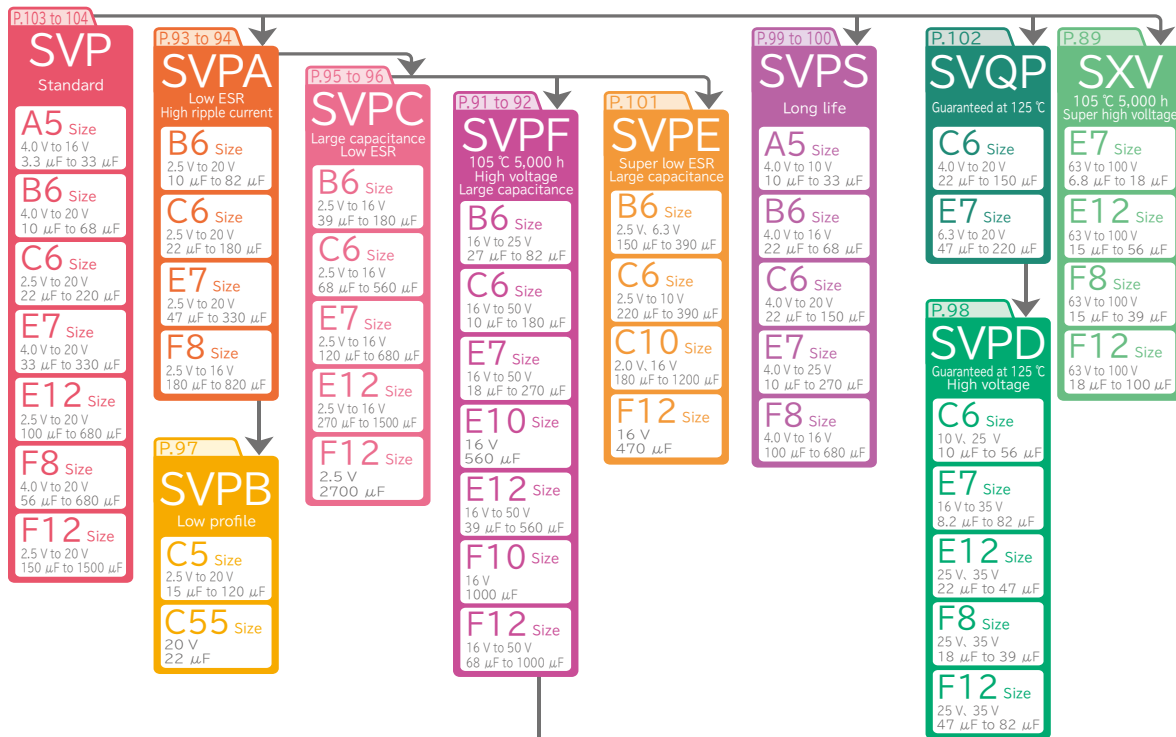

### Radial lead type

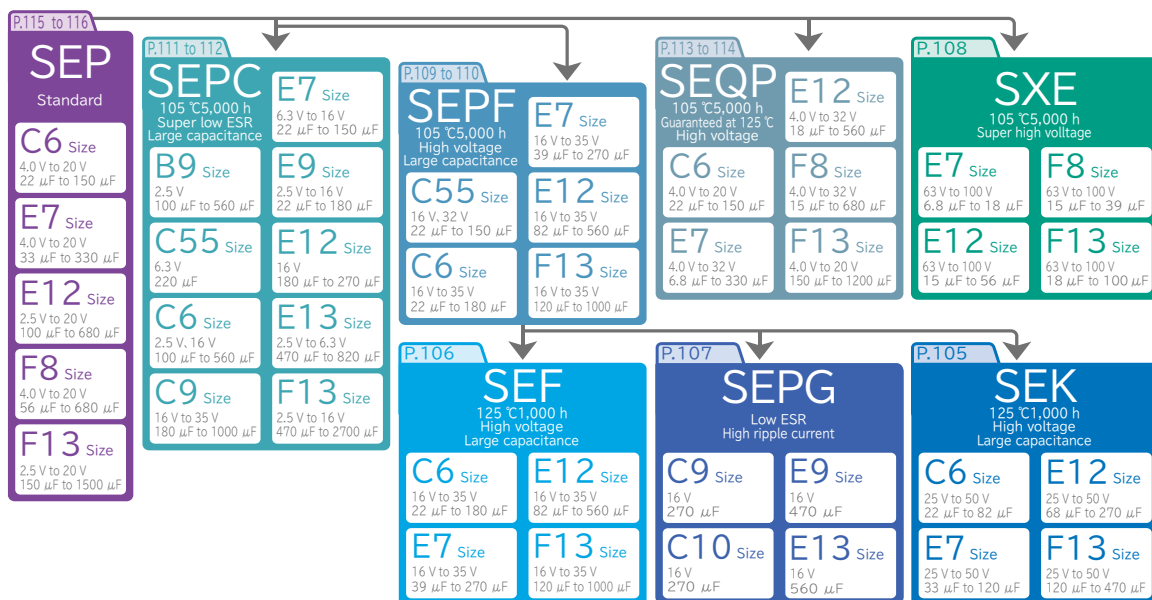

## SMD type

(unit : mm)															
A5 size	B45 size	B6 size	C5 size	C55 size	C6 size	C65 size	C8 size	C10 size	C10L size	E7 size	E10 size	E12 size	F8 size	F10 size	F12 size
P.99 to 100 SVPS P.103 to 104 SVP	P.90 SVPG	P.85 to 86 SVF P.87 to 88 SVPK P.91 to 92 SVPF P.93 to 94 SVPA P.95 to 96 SVPC P.99 to 100 SVPS P.101 SVPE P.10 to 104 SVP	P.97 SVPB	P.95 SVPB	P.85 to 86 SVF P.87 to 88 SVPK P.91 to 92 SVPF P.93 to 94 SVPA P.95 to 96 SVPC P.98 SVPD P.99 to 100 SVPS P.101 SVPE P.102 SVQP P.103 to 104 SVP	P.83 to 84 SVPT	P.90 SVPG	P.90 SVPG P.101 SVPE	P.90 SVPG	P.85 to 86 SVF P.87 to 88 SVPK P.89 SXV P.91 to 92 SVPF P.93 to 94 SVPA P.95 to 96 SVPC P.98 SVPD P.99 to 101 SVPS P.102 SVQP P.103 to 104 SVP	P.91 to 92 SVPF	P.85 to 86 SVF P.87 to 88 SVPK P.89 SXV P.91 to 92 SVPF P.93 to 94 SVPA P.95 to 96 SVPC P.98 SVPD P.103 to 104 SVP	P.89 SXV P.93 to 94 SVPA P.98 SVPD	P.85 to 86 SVF P.91 to 92 SVPF	P.85 to 86 SVF P.87 to 88 SVPK P.89 SXV P.91 to 92 SVPF P.93 to 94 SVPA P.95 to 96 SVPC P.98 SVPD P.101 SVPE P.103 to 104 SVP

※ Profile of case size are all indicated in maximum values.

## Radial lead type

B9 size	C55 size	C6 size	C6 size	C9 size	C10 size	E7 size	E7 size	E9 size	E12 size	E12 size	E13 size	F8 size	F8 size	F13 size	F13 size
P.111 to 112 SEPC	P.109 to 110 SEPF P.111 to 112 SEPC	P.106 SEF P.109 to 110 SEPF P.111 to 112 SEPC	P.105 SEK P.113 to 114 SEQP P.115 to 116 SEP	P.107 SEPG	P.107 SEPG	P.106 SEF P.108 SXE P.109 to 110 SEPF P.111 to 112 SEPC	P.105 SEK P.113 to 114 SEQP P.115 to 116 SEP	P.107 SEPG	P.105 SEK P.108 SXE P.111 to 112 SEPC P.109 to 110 SEPF P.115 to 116 SEP	P.105 SEK P.108 SXE P.111 to 112 SEPC P.109 to 110 SEPF P.115 to 116 SEP	P.108 SXE P.111 to 112 SEPC P.107 SEPG P.108 SXE P.113 to 114 SEQP P.115 to 116 SEP	P.108 SXE	P.113 to 114 SEQP P.115 to 116 SEP	P.105 SEK P.106 SEF P.108 SXE P.109 to 110 SEPF	P.111 to 112 SEPC P.113 to 114 SEQP P.115 to 116 SEP

※ Profile of case size are all indicated in maximum values.

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram

Products list

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP

SEK  
SEF  
SEPG  
SXE  
SEPF  
SEPC  
SEQP  
SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type









Low ESR(15 mΩ max.)

Large capacitance(560 μF max.)

Guaranteed at 105 °C 20000 h

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications	
Size code	C65	
Category temperature range	-55 °C to +105 °C	
Rated voltage range	2.5 V to 16 V	
Rated capacitance range	100 μF to 560 μF	
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Endurance	+105 °C, 20000 h, rated voltage applied	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 150 % of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 150 % of the initial limit
	DC leakage current	Within the initial limit (after voltage processing)

## Marking and dimensions

(unit : mm)

Size code	φD ±0.5	L <sup>+0.1</sup> / <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
C65	6.3	6.4	6.6	6.6	7.3	0.6 to 0.8	2.1

※ Depends on the case size.

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram Selection guide

### Products list

- SVPT**
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Standard (Reel size: φ 380)	
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)
SVPT	2.5	560	6.3	6.4	C65	3500	16	0.12	300	2R5SVPT560M	1000
	6.3	330	6.3	6.4	C65	3390	15	0.12	415	6SVPT330M	1000
	16	100	6.3	6.4	C65	2490	24	0.12	300	16SVPT100M	1000

※1: Ripple current (100 kHz/ +105 °C)

The surface temperature of aluminum case top must not exceed 105 °C. A rise in temperature due to self-heating by ripple current should be factored in.

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

Surface mount type	<b>SVPT</b>
	SVF
	SVPK
	SXV
	SVPG
	SVPF
	SVPA
	SVPC
	SVPB
	SVPD
	SVPS
SVPE	
SVQP	
SVP	
SEK	
SEF	
SEPG	
SXE	
SEPF	
SEPC	
SEQP	
SEP	

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



High voltage (50 V max.)

Large capacitance (1000  $\mu$ F max.)

Guaranteed at 125 °C 1000 h

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications					
	Size code	B6	C6	E7	E12	F10
Category temperature range	-55 °C to +125 °C					
Rated voltage range	16 V to 25 V	16 V to 50 V			16 V	16 V to 50 V
Rated capacitance range	27 $\mu$ F to 82 $\mu$ F	10 $\mu$ F to 180 $\mu$ F	18 $\mu$ F to 270 $\mu$ F	39 $\mu$ F to 560 $\mu$ F	1000 $\mu$ F	68 $\mu$ F to 1000 $\mu$ F
Capacitance tolerance	$\pm 20 \%$ (120 Hz/+20 °C)					
Leakage current	Please see the attached characteristics list					
Dissipation factor(tan $\delta$ )	Please see the attached characteristics list					
Endurance	+125 °C, 1000 h, rated voltage applied					
	Capacitance change	Within $\pm 20 \%$ of the initial value				
	tan $\delta$	$\leq 200 \%$ of the initial limit				
	DC leakage current	Within the initial limit				
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage					
	Capacitance change	Within $\pm 20 \%$ of the initial value				
	tan $\delta$	$\leq 150 \%$ of the initial limit				
	DC leakage current	Within the initial limit (after voltage processing)				

Surface mount type

## Marking and dimensions

※ Depends on the case size.

Size code	(unit : mm)						
	$\phi D \pm 0.5$	$L \begin{smallmatrix} +0.1 \\ -0.4 \end{smallmatrix}$	$W \pm 0.2$	$H \pm 0.2$	$C \pm 0.2$	R	$P \pm 0.2$
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F10	10.0	10.0*1	10.3	10.3	11.0	0.8 to 1.1	4.6
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

※1 :  $\pm 0.5$

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram Selection guide

### Products list

- SVPT
- SVF**
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Standard (Reel size: φ 380)	
			φD	L		Ripple current ※1 (mA rms)	Allowable ripple current※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)
SVF	16	82	5.0	5.9	B6	940	3000	27	0.12	262	16SVF82M	1500
		180	6.3	5.9	C6	1040	3300	22	0.12	576	16SVF180M	1000
		270	8.0	6.9	E7	1040	3300	22	0.12	864	16SVF270M	1000
		560	8.0	11.9	E12	1560	4950	14	0.12	1792	16SVF560M	400
		1000	10.0	10.0	F10	1350	4300	16	0.12	3200	16SVF1000MX	500
		1000	10.0	12.6	F12	1700	5400	12	0.12	3200	16SVF1000M	400
	20	56	5.0	5.9	B6	880	2800	30	0.12	224	20SVF56M	1500
		120	6.3	5.9	C6	1010	3200	25	0.12	480	20SVF120M	1000
		180	8.0	6.9	E7	1010	3200	25	0.12	720	20SVF180M	1000
		390	8.0	11.9	E12	1560	4950	14	0.12	1560	20SVF390M	400
		560	10.0	12.6	F12	1700	5400	12	0.12	2240	20SVF560M	400
	25	27	5.0	5.9	B6	770	2450	40	0.12	135	25SVF27M	1500
		47	6.3	5.9	C6	880	2800	30	0.12	235	25SVF47M	1000
		56	6.3	5.9		880	2800	30	0.12	280	25SVF56M	1000
		82	8.0	6.9	E7	940	3000	28	0.12	410	25SVF82M	1000
		100	8.0	6.9		1010	3200	24	0.12	500	25SVF100M	1000
		180	8.0	11.9	E12	1470	4650	16	0.12	900	25SVF180M	400
		330	10.0	12.6	F12	1580	5000	14	0.12	1650	25SVF330M	400
	35	22	6.3	5.9	C6	820	2600	35	0.12	154	35SVF22M	1000
		39	8.0	6.9	E7	880	2800	30	0.12	273	35SVF39M	1000
		82	8.0	11.9	E12	1260	4000	20	0.12	574	35SVF82M	400
		120	10.0	12.6	F12	1390	4400	18	0.12	840	35SVF120M	400
	50	10	6.3	5.9	C6	790	2500	40	0.12	100	50SVF10M	1000
		18	8.0	6.9	E7	850	2700	35	0.12	180	50SVF18M	1000
		39	8.0	11.9	E12	1200	3800	25	0.12	390	50SVF39M	400
		68	10.0	12.6	F12	1350	4300	20	0.12	680	50SVF68M	400

※1: Ripple current (100 kHz/ +105 °C < Tx ≦ +125 °C) /Allowable ripple current (100 kHz/ Tx ≦ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up

Series system diagram

Products list

SVPT

**SVF**

SVPK

SXV

SVPG

SVPF

SVPA

SVPC

SVPB

SVPD

SVPS

SVPE

SVQP

SVP

SEK

SEF

SEPG

SXE

SEPF

SEPC

SEQP

SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



High voltage (50 V max.) | Guaranteed at 125 °C 1000 h | RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications				
	B6	C6	E7	E12	F12
Size code	B6	C6	E7	E12	F12
Category temperature range	-55 °C to +125 °C				
Rated voltage range	16 V to 50 V				
Rated capacitance range	10 μF to 100 μF	22 μF to 220 μF	33 μF to 330 μF	68 μF to 680 μF	120 μF to 1200 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	Please see the attached characteristics list				
Dissipation factor (tan δ)	Please see the attached characteristics list				
Endurance	+125 °C, 1000 h, rated voltage applied				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

Surface mount type

## Marking and dimensions

Polarity marking (-)  
 Lot. No.  
 Series code\*  
 R. capacitance (μF)  
 R. voltage (V)

0.2 max

(-)

(+)

(unit : mm)

Size code	φD ±0.5	L <sup>+0.1</sup> / <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

※ Depends on the case size.

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram | Selection guide

### Products list

- SVPT
- SVF
- SVPK**
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Standard (Reel size: φ 380)					Part number	Min. Packaging Qty (pcs)
			φD	L		Ripple current ※1 (mA rms)	Allowable ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)		
SVPK	16	100	5.0	5.9	B6	940	3000	27	0.12	320	16SVPK100M	1500
		220	6.3	5.9	C6	1040	3300	22	0.12	704	16SVPK220M	1000
		330	8.0	6.9	E7	1040	3300	22	0.12	1056	16SVPK330M	1000
		680	8.0	11.9	E12	1560	4950	14	0.12	2176	16SVPK680M	400
		1200	10.0	12.6	F12	1700	5400	12	0.12	3840	16SVPK1200M	400
	20	68	5.0	5.9	B6	880	2800	30	0.12	272	20SVPK68M	1500
		150	6.3	5.9	C6	1010	3200	25	0.12	600	20SVPK150M	1000
		220	8.0	6.9	E7	1010	3200	25	0.12	880	20SVPK220M	1000
		470	8.0	11.9	E12	1560	4950	14	0.12	1880	20SVPK470M	400
		680	10.0	12.6	F12	1700	5400	12	0.12	2720	20SVPK680M	400
	25	33	5.0	5.9	B6	820	2600	35	0.12	165	25SVPK33M	1500
		82	6.3	5.9	C6	960	3060	25	0.12	410	25SVPK82M	1000
		120	8.0	6.9	E7	1010	3200	24	0.12	600	25SVPK120M	1000
		270	8.0	11.9	E12	1470	4650	16	0.12	1350	25SVPK270M	400
		470	10.0	12.6	F12	1590	5000	14	0.12	2350	25SVPK470M	400
	35	22	5.0	5.9	B6	820	2600	35	0.12	154	35SVPK22M	1500
		47	6.3	5.9	C6	930	2950	27	0.12	329	35SVPK47M	1000
		82	8.0	6.9	E7	960	3060	25	0.12	574	35SVPK82M	1000
		180	8.0	11.9	E12	1260	4000	20	0.12	1260	35SVPK180M	400
		330	10.0	12.6	F12	1390	4400	18	0.12	2310	35SVPK330M	400
50	10	5.0	5.9	B6	550	1750	80	0.12	100	50SVPK10M	1500	
	22	6.3	5.9	C6	820	2600	35	0.12	220	50SVPK22M	1000	
	33	8.0	6.9	E7	850	2700	35	0.12	330	50SVPK33M	1000	
	68	8.0	11.9	E12	1200	3800	25	0.12	680	50SVPK68M	400	
	120	10.0	12.6	F12	1350	4300	20	0.12	1200	50SVPK120M	400	

※1: Ripple current (100 kHz/ +105 °C < Tx ≤ +125 °C) / Allowable ripple current (100 kHz/ Tx ≤ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

- SVPT
- SVF
- SVPK**
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications			
Size code	E7	F8	E12	F12
Category temperature range	-55 °C to +125 °C			
Rated voltage range	63 V to 100 V			
Rated capacitance range	6.8 μF to 18 μF	15 μF to 39 μF	15 μF to 56 μF	18 μF to 100 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor(tan δ)	Please see the attached characteristics list			
Endurance	+125 °C, 1000 h, rated voltage applied			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 200 % of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit (after voltage processing)		

## Marking and dimensions

Surface mount type

Size code	φD ±0.5	L <sup>+0.1</sup> <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
F8	10.0	7.9	10.3	10.3	11.0	0.6 to 0.8	4.6
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

※ Depends on the case size.

## OS-CON

## Characteristics list

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Selection guide

Products list

- SVPT
- SVF
- SVPK
- SXV**
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Standard(Reel size: φ 380)	
			φD	L		Ripple current ※1 (mA rms)	Allowable ripple current※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Q'ty (pcs)
SXV	63	18	8.0	6.9	E7	340	1100	60	0.12	56	63SXV18M	1000
		33	8.0	11.9	E12	930	2950	25	0.12	104	63SXV33M	400
		39	8.0	11.9	E12	930	2950	25	0.12	122	63SXV39M	400
			10.0	7.9	F8	690	2190	50	0.12	122	63SXV39MX	500
		56	8.0	11.9	E12	930	2950	25	0.12	176	63SXV56M	400
		68	10.0	12.6	F12	1030	3280	25	0.12	214	63SXV68M	400
		100	10.0	12.6	F12	1030	3280	25	0.12	315	63SXV100M	400
		80	12	8.0	6.9	E7	340	1100	60	0.12	48	80SXV12M
	27		8.0	11.9	E12	780	2490	35	0.12	108	80SXV27M	400
			10.0	7.9	F8	660	2080	55	0.12	108	80SXV27MX	500
	33		8.0	11.9	E12	780	2490	35	0.12	132	80SXV33M	400
	47		10.0	12.6	F12	980	3100	28	0.12	188	80SXV47M	400
	56		10.0	12.6	F12	980	3100	28	0.12	224	80SXV56M	400
	100	6.8	8.0	6.9	E7	340	1100	60	0.12	34	100SXV6R8M	1000
15			10.0	7.9	F8	630	2000	60	0.12	75	100SXV15MX	500
			8.0	11.9	E12	730	2350	40	0.12	75	100SXV15M	400
18		10.0	12.6	F12	940	3000	30	0.12	90	100SXV18M	400	
		8.0	11.9	E12	730	2350	40	0.12	90	100SXV18MX	400	
22		10.0	12.6	F12	940	3000	30	0.12	110	100SXV22M	400	
27		10.0	12.6	F12	940	3000	30	0.12	135	100SXV27M	400	

※1: Ripple current (100 kHz / +105 °C < Tx ≤ 125 °C), Allowable ripple current (100 kHz / Tx ≤ 105 °C) ※2: ESR (100 kHz to 300 kHz / +20 °C)

※3: tan δ (120 Hz / +20 °C) ※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



Low profile(Height 4.5 mm max.)

Low ESR (6.5 mΩ max.)

RoHS compliance, Halogen free

## Specifications

Items	Specifications			
Size code	B45	C8	C10	C10L
Category temperature range	-55 °C to +105 °C			
Rated voltage range	16 V to 25 V		16 V	
Rated capacitance range	15 μF to 47 μF		270 μF	330 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor(tan δ)	Please see the attached characteristics list			
Endurance	+105 °C, 5000 h, rated voltage applied			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit (after voltage processing)		

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram

Products list
SVPT
SVF
SVPK
SXV
<b>SVPG</b>
SVPF
SVPA
SVPC
SVPB
SVPD
SVPS
SVPE
SVQP
SVP
SEK
SEF
SEPG
SXE
SEPF
SEPC
SEQP
SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Marking and dimensions

※ Depends on the case size.

Size code	φD ±0.5	L <sup>+0.1</sup> / <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
B45	5.0	4.4	5.3	5.3	6.0	0.6 to 0.8	1.4
C8	6.3	7.9	6.6	6.6	7.3	0.6 to 0.8	2.1
C10	6.3	9.9	6.6	6.6	7.3	0.6 to 0.8	2.1
C10L	6.3	10.4	6.6	6.6	7.3	1.5 to 1.8	2.1

(unit : mm)

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Standard (Reel size: φ 380)	
			φD	L		Rated ripple current ※1 (mA r.m.s.)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Q'ty (pcs)
SVPG	16	47	5.0	4.4	B45	3200	25	0.12	150	16SVPG47M	2500
			6.3	7.9	C8	5080	10	0.12	864	16SVPG270MX	900
		270	6.3	9.9	C10	5800	8	0.12	864	16SVPG270M	500
			6.3	10.4	C10L	7500	6.5	0.12	1056	16SVPG330M	700
	20	33	5.0	4.4	B45	3000	27	0.12	132	20SVPG33M	2500
			5.0	4.4		2800	30	0.12	75	25SVPG15M	2500

※1: Rated ripple current (100 kHz/ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



High voltage (50 V max.) Large capacitance (1000  $\mu\text{F}$  max.) Guaranteed at 105 °C 5000 h RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications						
Size code	B6	C6	E7	E10	E12	F10	F12
Category temperature range	-55 °C to +105 °C						
Rated voltage range	16 V to 25 V	16 V to 50 V	16 V	16 V to 50 V	16 V	16 V to 50 V	16 V to 50 V
Rated capacitance range	27 $\mu\text{F}$ to 82 $\mu\text{F}$	10 $\mu\text{F}$ to 180 $\mu\text{F}$	18 $\mu\text{F}$ to 270 $\mu\text{F}$	560 $\mu\text{F}$	39 $\mu\text{F}$ to 560 $\mu\text{F}$	1000 $\mu\text{F}$	68 $\mu\text{F}$ to 1000 $\mu\text{F}$
Capacitance tolerance	$\pm 20\%$ (120 Hz/+20 °C)						
Leakage current	Please see the attached characteristics list						
Dissipation factor ( $\tan \delta$ )	Please see the attached characteristics list						
Endurance	+105 °C, 5000 h, rated voltage applied						
	Capacitance change	Within $\pm 20\%$ of the initial value					
	$\tan \delta$	$\leq 150\%$ of the initial limit					
	DC leakage current	Within the initial limit					
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage						
	Capacitance change	Within $\pm 20\%$ of the initial value					
	$\tan \delta$	$\leq 150\%$ of the initial limit					
	DC leakage current	Within the initial limit (after voltage processing)					

## Marking and dimensions

※ Depends on the case size.

(unit : mm)

Size code	$\phi D \pm 0.5$	$L \begin{smallmatrix} +0.1 \\ -0.4 \end{smallmatrix}$	$W \pm 0.2$	$H \pm 0.2$	$C \pm 0.2$	R	$P \pm 0.2$
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
E10	8.0	10.0 $\times 1$	8.3	8.3	9.0	0.8 to 1.1	3.2
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F10	10.0	10.0 $\times 1$	10.3	10.3	11.0	0.8 to 1.1	4.6
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

※1:  $\pm 0.5$

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram Selection guide

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF**
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Standard (Reel size: φ 380)	
			φD	L		Rated ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)
SVPF	16	82	5.0	5.9	B6	3000	27	0.12	262	16SVPF82M	1500
		180	6.3	5.9	C6	3300	22	0.12	576	16SVPF180M	1000
		270	8.0	6.9	E7	3300	22	0.12	864	16SVPF270M	1000
		560	8.0	10.0	E10	3900	18	0.12	1792	16SVPF560MX	500
			8.0	11.9	E12	4950	14	0.12	1792	16SVPF560M	400
		1000	10.0	10.0	F10	4300	16	0.12	3200	16SVPF1000MX	500
	10.0		12.6	F12	5400	12	0.12	3200	16SVPF1000M	400	
	20	56	5.0	5.9	B6	2800	30	0.12	224	20SVPF56MX	1500
		120	6.3	5.9	C6	3200	25	0.12	480	20SVPF120M	1000
		180	8.0	6.9	E7	3200	25	0.12	720	20SVPF180M	1000
		390	8.0	11.9	E12	4950	14	0.12	1560	20SVPF390M	400
		560	10.0	12.6	F12	5400	12	0.12	2240	20SVPF560M	400
	25	27	5.0	5.9	B6	2450	40	0.12	135	25SVPF27MX	1500
		47	6.3	5.9	C6	2800	30	0.12	235	25SVPF47M	1000
		56	6.3	5.9		2800	30	0.12	280	25SVPF56M	1000
		82	8.0	6.9	E7	3000	28	0.12	410	25SVPF82M	1000
		100	8.0	6.9		3200	24	0.12	500	25SVPF100M	1000
		180	8.0	11.9	E12	4650	16	0.12	900	25SVPF180M	400
		330	10.0	12.6	F12	5000	14	0.12	1650	25SVPF330M	400
	35	22	6.3	5.9	C6	2600	35	0.12	154	35SVPF22M	1000
		39	8.0	6.9	E7	2800	30	0.12	273	35SVPF39M	1000
		82	8.0	11.9	E12	4000	20	0.12	574	35SVPF82M	400
		120	10.0	12.6	F12	4400	18	0.12	840	35SVPF120M	400
	50	10	6.3	5.9	C6	2500	40	0.12	100	50SVPF10M	1000
		18	8.0	6.9	E7	2700	35	0.12	180	50SVPF18M	1000
		39	8.0	11.9	E12	3800	25	0.12	390	50SVPF39M	400
		68	10.0	12.6	F12	4300	20	0.12	680	50SVPF68M	400

※1: Rated ripple current (100 kHz / +105 °C)

※2: ESR (100 kHz to 300 kHz / +20 °C)

※3: tan δ (120 Hz / +20 °C)

※4: After 2 minutes

◆ Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up

Series system diagram

Products list

SVPT

SVF

SVPK

SXV

SVPG

**SVPF**

SVPA

SVPC

SVPB

SVPD

SVPS

SVQE

SVQP

SVQ

SEK

SEF

SEPG

SXE

SEPF

SEPC

SEQP

SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Low ESR (18 mΩ max.)

High ripple (4240 mA rms max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications			
	B6	C6	E7	F8
Size code	B6	C6	E7	F8
Category temperature range	-55 °C to +105 °C			
Rated voltage range	2.5 V to 20 V			2.5 V to 16 V
Rated capacitance range	10 μF to 82 μF	22 μF to 180 μF	47 μF to 330 μF	180 μF to 820 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor (tan δ)	Please see the attached characteristics list			
Endurance	+105 °C, 2000 h, rated voltage applied			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit (after voltage processing)		

## Marking and dimensions

Size code	(unit : mm)						
	φD ±0.5	L <sup>+0.1</sup> / <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
F8	10.0	7.9	10.3	10.3	11.0	0.6 to 0.8	4.6

※ Depends on the case size.

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram Selection guide

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA**
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Standard (Reel size: φ 380)	
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)
SVPA	2.5	82	5.0	5.9	B6	1970	30	0.12	300	2R5SVPA82MAA	1500
		180	6.3	5.9	C6	2690	20	0.12	300	2R5SVPA180MAA	1000
		330	8.0	6.9	E7	3370	20	0.12	500	2R5SVPA330MAA	1000
		820	10.0	7.9	F8	4240	19	0.12	500	2R5SVPA820M	500
	4	68	5.0	5.9	B6	1970	30	0.12	300	4SVPA68MAA	1500
		150	6.3	5.9	C6	2570	22	0.12	300	4SVPA150MAA	1000
		270	8.0	6.9	E7	3220	22	0.12	500	4SVPA270MAA	1000
		680	10.0	7.9	F8	4130	20	0.12	544	4SVPA680M	500
	6.3	47	5.0	5.9	B6	1970	30	0.12	300	6SVPA47MAA	1500
		120	6.3	5.9	C6	2570	22	0.12	300	6SVPA120MAA	1000
		220	8.0	6.9	E7	3220	22	0.12	500	6SVPA220MAA	1000
		470	10.0	7.9	F8	4130	20	0.12	592	6SVPA470M	500
	10	68	6.3	5.9	C6	2200	30	0.12	300	10SVPA68MAA	1000
		150	8.0	6.9	E7	2760	30	0.12	500	10SVPA150MAA	1000
		330	10.0	7.9	F8	3770	24	0.12	660	10SVPA330M	500
	16	39	6.3	5.9	C6	2040	35	0.12	300	16SVPA39MAA	1000
			6.3	5.9		2460	24	0.12	300	16SVPA39MAAY	1000
		82	8.0	6.9	E7	2760	30	0.12	262	16SVPA82MAA	1000
		180	10.0	7.9	F8	3430	29	0.12	576	16SVPA180M	500
	20	10	5.0	5.9	B6	1700	40	0.12	80	20SVPA10M	1500
22		6.3	5.9	C6	2040	35	0.12	88	20SVPA22M	1000	
47		8.0	6.9	E7	2630	33	0.12	188	20SVPA47M	1000	

※1: Ripple current (100 kHz/ +105 °C)

※2: ESR (100 Hz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
**SVPA**  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP

SEK  
SEF  
SEPG  
SXE  
SEPF  
SEPC  
SEQP  
SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type





Low ESR (9 mΩ max.)

Large capacitance (2700 μF max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Selection guide

Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC**
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Items	Specifications				
	B6	C6	E7	E12	F12
Size code	B6	C6	E7	E12	F12
Category temperature range	-55 °C to +105 °C				
Rated voltage range	2.5 V to 16 V				2.5 V
Rated capacitance range	39 μF to 180 μF	68 μF to 560 μF	120 μF to 680 μF	270 μF to 1500 μF	2700 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	Please see the attached characteristics list				
Dissipation factor (tan δ)	Please see the attached characteristics list				
Endurance	+105 °C, 2000 h, rated voltage applied				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit			
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % times of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

## Marking and dimensions

※ Depends on the case size.

(unit : mm)

Size code	φD ±0.5	L <sup>+0.1</sup> / <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Standard(Reel size: φ 380)		
			φD	L		Rated ripple current ※1 (mA rms)	ESR		tan δ ※2	LC ※3 (μA)	Part number	Min. Packaging Qty (pcs)	
							100 kHz/20 °C (mΩ max.)	300 kHz/20 °C (mΩ max.)					
SVPC	2.5	180	5.0	5.9	B6	1970	30	26	0.12	300	2R5SVPC180M	1500	
			5.0	5.9		2200	24	20	0.12	300	2R5SVPC180MY	1500	
			5.0	5.9		2800	19	16	0.12	300	2R5SVPC180MV	1500	
		390	6.3	5.9	C6	2410	25	22	0.12	300	2R5SVPC390M	1000	
			6.3	5.9		3160	15	13	0.12	300	2R5SVPC390MV	1000	
			6.3	5.9		3500	16	14	0.12	300	2R5SVPC560M	1000	
		680	8.0	6.9	E7	3370	20	17	0.12	500	2R5SVPC680M	1000	
		820	8.0	11.9	E12	5380	9	8	0.15	500	2R5SVPC820M	400	
		1500	8.0	11.9		5150	10	9	0.15	750	2R5SVPC1500M	400	
		2700	10.0	12.6	F12	5070	12	10	0.15	1350	2R5SVPC2700M	400	
		4.0	150	5.0	5.9	B6	1970	30	26	0.12	300	4SVPC150M	1500
				5.0	5.9		2240	23	20	0.12	300	4SVPC150MY	1500
	5.0			5.9	2730		20	17	0.12	300	4SVPC150MV	1500	
	330		6.3	5.9	C6	2320	27	23	0.12	300	4SVPC330M	1000	
			6.3	5.9		2630	21	18	0.12	300	4SVPC330MY	1000	
			6.3	5.9		3160	15	13	0.12	300	4SVPC330MV	1000	
	560		8.0	6.9	E7	3220	22	19	0.12	500	4SVPC560M	1000	
			8.0	11.9	E12	5380	9	8	0.15	500	4SVPC560MX	400	
			1200	8.0		11.9	4700	12	10	0.15	960	4SVPC1200M	400
	1500		8.0	11.9		4700	12	10	0.15	1200	4SVPC1500M	400	
	6.3		100	5.0	5.9	B6	1970	30	26	0.12	300	6SVPC100M	1500
				5.0	5.9		2150	25	21	0.12	300	6SVPC100MY	1500
		120	5.0	5.9		2660	21	18	0.12	300	6SVPC120MV	1500	
		220	6.3	5.9	C6	2320	27	23	0.12	300	6SVPC220M	1000	
			6.3	5.9		3160	15	13	0.12	300	6SVPC220MV	1000	
		330	6.3	5.9		3390	17	15	0.12	415	6SVPC330M	1000	
		390	8.0	6.9	E7	3220	22	19	0.12	491	6SVPC390M	1000	
		820	8.0	11.9	E12	4700	12	10	0.15	1033	6SVPC820M	400	
	10	68	5.0	5.9	B6	1970	30	26	0.12	300	10SVPC68M	1500	
			5.0	5.9		2540	23	20	0.12	300	10SVPC68MV	1500	
		120	6.3	5.9	C6	2320	27	23	0.12	300	10SVPC120M	1000	
			6.3	5.9		2600	22	19	0.12	300	10SVPC120MV	1000	
		270	8.0	6.9	E7	3220	22	19	0.12	500	10SVPC270M	1000	
		330	8.0	6.9		3460	19	17	0.12	660	10SVPC330M	1000	
	16	39	5.0	5.9	B6	1820	35	30	0.12	300	16SVPC39M	1500	
			5.0	5.9		2350	27	23	0.12	300	16SVPC39MV	1500	
		68	6.3	5.9	C6	2200	30	26	0.12	300	16SVPC68M	1000	
			6.3	5.9		2440	25	22	0.12	300	16SVPC68MV	1000	
		100	6.3	5.9		2490	24	23	0.12	300	16SVPC100M	1000	
		120	8.0	6.9	E7	2900	27	23	0.12	500	16SVPC120M	1000	
		150	8.0	6.9		3220	22	21	0.12	500	16SVPC150M	1000	
		270	8.0	11.9	E12	4070	16	14	0.15	864	16SVPC270M	400	

※1:Rated ripple current (100 kHz/ +105 °C) ※2:tan δ (120 Hz/+20 °C) ※3:After 2 minutes  
 ◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
 EOL Models

### OS-CON

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide  
 Series system diagram  
 Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC**
- SVPB
- SVPD
- SVPS
- SVQE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Radial lead type



Low profile (Height 5 mm max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications	
Size code	C5	C55
Category temperature range	-55 °C to +105 °C	
Rated voltage range	2.5 V to 20 V	20 V
Rated capacitance range	15 μF to 120 μF	22 μF
Capacitance tolerance	±20(120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Endurance	+105 °C, 1000 h, rated voltage applied	
	Capacitance change	Within ±20 % of the initial value (±30 % for C5 size)
	tan δ	≤ 150 % of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 150 % of the initial limit
	DC leakage current	Within the initial limit (after voltage processing)

Surface mount type

## Marking and dimensions

Size code	φD ±0.5	L <sup>+0.1</sup> <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
C5	6.3	4.9	6.6	6.6	7.3	0.6 to 0.8	2.1
C55	6.3	5.4	6.6	6.6	7.3	0.6 to 0.8	2.1

※ Depends on the case size.

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPB**
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Standard (Reel size: φ 380)	
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)
SVPB	2.5	120	6.3	4.9	C5	1670	40	0.12	120	2R5SVPB120M	1300
	4	100	6.3	4.9		1670	40	0.12	160	4SVPB100M	1300
	6.3	82	6.3	4.9		1670	40	0.12	207	6SVPB82M	1300
	10	56	6.3	4.9		1670	40	0.12	224	10SVPB56M	1300
	16	33	6.3	4.9		1670	40	0.12	211	16SVPB33M	1300
	20	15	6.3	4.9		2000	45	0.12	120	20SVPB15M	1300
		22	6.3	5.4	C55	2000	35	0.12	88	20SVPB22M	1000

※1: Ripple current (100 kHz/+105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



Guaranteed at 125 °C 2000 h

Guaranteed at 85 °C 85 %

RoHS compliance, Halogen free

## Specifications

Items	Specifications				
Size code	C6	E7	F8	E12	F12
Category temperature range	-55 °C to +125 °C				
Rated voltage range	10 V to 25 V	16 V to 35 V	25 V to 35 V		
Rated capacitance range	10 μF to 56 μF	8.2 μF to 82 μF	18 μF to 39 μF	22 μF to 47 μF	47 μF to 82 μF
Capacitance tolerance	±20(120 Hz/+20 °C)				
Leakage current	Please see the attached characteristics list				
Dissipation factor(tan δ)	Please see the attached characteristics list				
Endurance	+125 °C, 2000 h, rated voltage applied				
	Capacitance change	Within±20 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
Damp heat (Steady state)	+85 °C, 85 % to 90 %, 1000 h, rated voltage applied				
	Capacitance change	Within±20 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Marking and dimensions

※ Depends on the case size.

(unit : mm)

Size code	φD ±0.5	L <sup>+0.1</sup> <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
F8	10.0	7.9	10.3	10.3	11.0	0.6 to 0.8	4.6
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Series system diagram  
Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD**
- SVPS
- SVQE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Standard(Reel size: φ 380)	
			φD	L		Rated ripple current ※1 (mA rms)	Allowable ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Q'ty (pcs)
SVPD	10	56	6.3	5.9	C6	538	1700	45	0.12	112	10SVPD56M	1000
	16	82	8.0	6.9	E7	670	2120	40	0.12	262	16SVPD82M	1000
	25	10	6.3	5.9	C6	474	1500	65	0.10	50	25SVPD10M	1000
		22	8.0	6.9	E7	580	1835	48	0.10	110	25SVPD22M	1000
		39	10.0	7.9	F8	664	2100	45	0.10	195	25SVPD39M	500
		47	8.0	11.9	E12	943	2980	30	0.12	235	25SVPD47M	400
		82	10.0	12.6	F12	1202	3800	28	0.12	410	25SVPD82M	400
	35	8.2	8.0	6.9	E7	400	1300	70	0.10	57	35SVPD8R2M	1000
		18	10.0	7.9	F8	550	1800	60	0.10	126	35SVPD18M	500
		22	8.0	11.9	E12	700	2300	50	0.12	154	35SVPD22M	400
		47	10.0	12.6	F12	1150	3650	30	0.12	329	35SVPD47M	400

※1: Rated ripple current (100 kHz/105 °C < Tx ≤ 125 °C) / Allowable ripple current (100 kHz/ Tx ≤ 105 °C) ※2: ESR (100 kHz~300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C) ※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



Guaranteed at 105 °C 5000 h

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications				
	A5	B6	C6	E7	F8
Size code	A5	B6	C6	E7	F8
Category temperature range	-55 °C to +105 °C				
Rated voltage range	4 V to 10 V	4 V to 16 V	4 V to 20 V	4 V to 25 V	4 V to 16 V
Rated capacitance range	10 μF to 33 μF	22 μF to 68 μF	22 μF to 150 μF	10 μF to 270 μF	100 μF to 680 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	Please see the attached characteristics list				
Dissipation factor (tan δ)	Please see the attached characteristics list				
Endurance	+105 °C, 5000 h, rated voltage applied (25 V → 20 V applied)				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit			
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

Surface mount type

## Marking and dimensions

※ Depends on the case size.

(unit : mm)

Size code	φD ±0.5	L <sup>+0.1</sup> <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
A5	4.0	5.4	4.3	4.3	5.0	0.6 to 0.8	1.0
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
F8	10.0	7.9	10.3	10.3	11.0	0.6 to 0.8	4.6

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

Selection guide

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS**
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Standard(Reel size: φ 380)	
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)
SVPS	4	33	4.0	5.4	A5	740	200	0.15	66	4SVPS33M	2000
		68	5.0	5.9	B6	1970	30	0.12	300	4SVPS68M	1500
		150	6.3	5.9	C6	2570	22	0.12	300	4SVPS150M	1000
		270	8.0	6.9	E7	3220	22	0.12	500	4SVPS270M	1000
		680	10.0	7.9	F8	4130	20	0.12	544	4SVPS680M	500
	6.3	22	4.0	5.4	A5	740	200	0.12	69.3	6SVPS22M	2000
		47	5.0	5.9	B6	1970	30	0.12	300	6SVPS47M	1500
		120	6.3	5.9	C6	2570	22	0.12	300	6SVPS120M	1000
		220	8.0	6.9	E7	3220	22	0.12	500	6SVPS220M	1000
		470	10.0	7.9	F8	4130	20	0.12	592	6SVPS470M	500
	10	10	4.0	5.4	A5	700	220	0.10	50	10SVPS10M	2000
		15	4.0	5.4		740	200	0.10	75	10SVPS15M	2000
		33	5.0	5.9	B6	1100	70	0.12	165	10SVPS33M	1500
		68	6.3	5.9	C6	2200	30	0.12	300	10SVPS68M	1000
		150	8.0	6.9	E7	2760	30	0.12	500	10SVPS150MX	1000
			10.0	7.9	F8	3020	30	0.12	300	10SVPS150M	500
	330	10.0	7.9	3770		24	0.12	660	10SVPS330M	500	
	16	22	5.0	5.9	B6	1060	90	0.10	176	16SVPS22M	1500
		39	6.3	5.9	C6	2460	24	0.12	300	16SVPS39M	1000
		82	8.0	6.9	E7	2760	30	0.12	262	16SVPS82M	1000
		100	10.0	7.9	F8	2670	35	0.12	320	16SVPS100M	500
		180	10.0	7.9		3430	29	0.12	576	16SVPS180M	500
	20	22	6.3	5.9	C6	1450	60	0.10	88	20SVPS22M	1000
		47	8.0	6.9	E7	1890	45	0.12	188	20SVPS47M	1000
		25	10	8.0		6.9	1500	60	0.10	125	25SVPS10M

- ※1: Ripple current (100 kHz/ +105 °C)  
: The surface temperature of aluminum case top must not exceed 105 °C. A rise in temperature due to self-heating by ripple current should be factored in.
- ※2: ESR (100 kHz to 300 kHz/+20 °C)
- ※3: tan δ (120 Hz/+20 °C)
- ※4: After 2 minutes
- ◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram

- Products list
- SVPT
  - SVF
  - SVPK
  - SXV
  - SVPG
  - SVPF
  - SVPA
  - SVPC
  - SVPB
  - SVPD
  - SVPS**
  - SVPE
  - SVQP
  - SVP
  - SEK
  - SEF
  - SEPG
  - SXE
  - SEPF
  - SEPC
  - SEQP
  - SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Super low ESR(8 mΩ max.)

Large capacitance(1200 μF max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications			
Size code	B6	C6	C10	F12
Category temperature range	-55 °C to +105 °C			
Rated voltage range	2.5 V to 6.3 V	2.5 V to 10 V	2 V to 16 V	16 V
Rated capacitance range	150 μF to 390 μF	220 μF to 390 μF	180 μF to 1200 μF	470 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor(tan δ)	Please see the attached characteristics list			
Endurance	+105 °C, 2000 h, rated voltage applied			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
DC leakage current	Within the initial limit (after voltage processing)			

## Marking and dimensions

Surface mount type

Size code	φD ±0.5	L <sup>+0.1</sup> / <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
C10	6.3	9.9	6.6	6.6	7.3	0.6 to 0.8	2.1
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

※ Depends on the case size.

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE**
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Standard(Reel size : φ 380)			
			φD	L		Rated ripple current ※1 (mA rms)	ESR		tan δ ※2	LC ※3 (μA)	Part number	Min. Packaging Qty (pcs)		
						100 kHz/20 °C (mΩ max.)		300 kHz/20 °C (mΩ max.)						
SVPE	2.5	1200	6.3	9.9	C10	5230	8	8	0.12	500	2SVPE1200M	500		
													270	5.0
		330	5.0	5.9		B6	3150	15	13	0.12	500	2R5SVPE330M		
													390	5.0
		6.3	5.9	C6		3900	10	9	0.12	500	2R5SVPE390M	1000		
													6.3	150
	180	5.0	5.9	3150	15	13	0.12	500	6SVPE180M	1500				
											220	5.0		5.9
	6.3	5.9	C6	3900	10	9	0.12	500	6SVPE220M	1000				
											10	220		6.3
	16	180	6.3	9.9	C10	4460	11	10	0.12	576				
											470	10.0	12.6	F12

※1: Rated ripple current (100 kHz/ +105 °C) ※2: tan δ (120 Hz/+20 °C) ※3: After 2 minutes  
◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.





Guaranteed at 125 °C 1000 h

RoHS compliance, Halogen free

## Specifications

Items	Specifications	
Size code	C6	E7
Category temperature range	-55 °C to +125 °C	
Rated voltage range	4 V to 20 V	6.3 V to 20 V
Rated capacitance range	22 μF to 150 μF	47 μF to 220 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	Please see the attached characteristics list	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Endurance	+125 °C, 1000 h, rated voltage applied	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 200 % of the initial limit
	DC leakage current	Within the initial limit
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage	
	Capacitance change	Within ±20 % of the initial value
	tan δ	≤ 150 % of the initial limit
	DC leakage current	Within the initial limit (after voltage processing)

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## Marking and dimensions

※ Depends on the case size.

Size code	φD ±0.5	L <sup>+0.1</sup> <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2

(unit : mm)

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Series system diagram

#### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP**
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Standard (Reel size: φ 380)			
			φD	L		Ripple current ※1 (mA rms)	Allowable ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Q'ty (pcs)		
SVQP	4	150	6.3	5.9	C6	572	1810	40	0.12	300	4SVQP150M	1000		
			82	5.9		538	1700	45	0.12	258	6SVQP82M	1000		
	6.3	100	6.3	5.9	E7	572	1810	40	0.12	315	6SVQP100M	1000		
			220	6.9		810	2560	35	0.12	693	6SVQP220M	1000		
	10	56	6.3	5.9	C6	538	1700	45	0.12	280	10SVQP56M	1000		
				120		6.9	E7	810	2560	35	0.12	600	10SVQP120M	1000
				150		6.9		810	2560	35	0.12	750	10SVQP150M	1000
	16	39	6.3	5.9	C6	512	1620	50	0.10	312	16SVQP39M	1000		
				82		6.9	E7	670	2120	40	0.12	656	16SVQP82M	1000
	20	22	6.3	5.9	C6	459	1450	60	0.10	220	20SVQP22M	1000		
				47		6.9	E7	598	1890	45	0.12	470	20SVQP47M	1000

※1: Ripple current (100 kHz / +105 °C < Tx ≤ 125 °C), Allowable ripple current (100 kHz / Tx ≤ 105 °C)

※2: ESR (100 kHz to 300 kHz / +20 °C)

※3: tan δ (120 Hz / +20 °C)

※4: After 2 minutes

◆ Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



Standard

Wealth models

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications						
	A5	B6	C6	E7	F8	E12	F12
Size code	A5	B6	C6	E7	F8	E12	F12
Category temperature range	-55 °C to +105 °C						
Rated voltage range(V)	4 to 16	4 to 20	2.5 to 20	4 to 20		2.5 to 20	
Rated capacitance range(μF)	3.3 to 33	10 to 68	22 to 220	33 to 330	56 to 680	100 to 680	150 to 1500
Capacitance tolerance	±20 % (120 Hz/+20 °C)						
Leakage current	Please see the attached characteristics list						
Dissipation factor(tan δ)	Please see the attached characteristics list						
Endurance	+105 °C, 2000 h, rated voltage applied						
	Capacitance change	Within ±20 % of the initial value					
	tan δ	≤ 150 % of the initial limit					
	DC leakage current	Within the initial limit					
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage						
	Capacitance change	Within ±20 % of the initial value					
	tan δ	≤ 150 % of the initial limit					
	DC leakage current	Within the initial limit (after voltage processing)					

Surface mount type

## Marking and dimensions

※ Depends on the case size.

(unit : mm)

Size code	φD ±0.5	L <sup>+0.1</sup> <sub>-0.4</sub>	W ±0.2	H ±0.2	C ±0.2	R	P ±0.2
A5	4.0	5.4	4.3	4.3	5.0	0.6 to 0.8	1.0
B6	5.0	5.9	5.3	5.3	6.0	0.6 to 0.8	1.4
C6	6.3	5.9	6.6	6.6	7.3	0.6 to 0.8	2.1
E7	8.0	6.9	8.3	8.3	9.0	0.6 to 0.8	3.2
F8	10.0	7.9	10.3	10.3	11.0	0.6 to 0.8	4.6
E12	8.0	11.9	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.6	10.3	10.3	11.0	0.8 to 1.1	4.6

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Selection guide

Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP**
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Standard (Reel size: φ 380)		
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	Part number	Min. Packaging Qty (pcs)	
SVP	2.5	220	6.3	5.9	C6	2390	23	0.12	110	2R5SVP220M	1000	
		680	8.0	11.9	E12	4520	13	0.15	340	2R5SVP680M	400	
		1500	10.0	12.6	F12	5440	12	0.18	750	2R5SVP1500M	400	
	4	33	4.0	5.4	A5	740	200	0.15	66	4SVP33M	2000	
		39	5.0	5.9	B6	1100	70	0.12	78	4SVP39M	1500	
		68	5.0	5.9		1400	60	0.12	136	4SVP68M	1500	
		150	6.3	5.9	C6	1810	40	0.12	120	4SVP150MX	1000	
		330	8.0	6.9	E7	2560	35	0.12	264	4SVP330M	1000	
		560	8.0	11.9	E12	4520	13	0.15	448	4SVP560M	400	
		680	10.0	7.9	F8	3700	25	0.12	544	4SVP680M	500	
		1200	10.0	12.6	F12	5440	12	0.18	960	4SVP1200M	400	
		6.3	22	4.0	5.4	A5	740	200	0.12	69.3	6SVP22M	2000
	47		5.0	5.9	B6	1100	70	0.12	148	6SVP47M	1500	
	82		6.3	5.9	C6	1700	45	0.12	103	6SVP82M	1000	
	100		6.3	5.9		1810	40	0.12	126	6SVP100M	1000	
	120		6.3	5.9		2780	17	0.12	151	6SVP120MV	1000	
	220		8.0	6.9	E7	2560	35	0.12	277	6SVP220MX	1000	
			10.0	7.9	F8	3700	25	0.12	277	6SVP220M	500	
	330		10.0	7.9		3700	25	0.12	416	6SVP330M	500	
	470		10.0	7.9	E12	3700	25	0.12	592	6SVP470MX	500	
			8.0	11.9		4210	15	0.15	592	6SVP470M	400	
	820		10.0	12.6	F12	5440	12	0.15	775	6SVP820M	400	
	10		4.7	4.0	5.4	A5	670	240	0.08	23.5	10SVP4R7M	2000
		6.8	4.0	5.4	670		240	0.09	34	10SVP6R8M	2000	
		10	4.0	5.4	700		220	0.10	50	10SVP10M	2000	
		15	4.0	5.4	740		200	0.10	75	10SVP15M	2000	
		33	5.0	5.9	B6	1100	70	0.12	165	10SVP33M	1500	
		47	6.3	5.9	C6	1620	50	0.12	94	10SVP47M	1000	
		56	6.3	5.9		1700	45	0.12	112	10SVP56M	1000	
		120	8.0	6.9	E7	2560	35	0.12	240	10SVP120M	1000	
		150	8.0	6.9	F8	2560	35	0.12	300	10SVP150MX	1000	
			10.0	7.9		3020	30	0.12	300	10SVP150M	500	
		270	10.0	7.9	E12	3700	25	0.12	540	10SVP270M	500	
		330	10.0	7.9		3700	25	0.12	660	10SVP330MX	500	
			8.0	11.9	3950	17	0.15	660	10SVP330M	400		
		560	10.0	12.6	F12	5230	13	0.15	840	10SVP560M	400	
		16	3.3	4.0	5.4	A5	660	260	0.07	26.4	16SVP3R3M	2000
	15		5.0	5.9	B6	1020	120	0.10	120	16SVP15M	1500	
	22		5.0	5.9		1060	90	0.10	176	16SVP22M	1500	
	39		6.3	5.9	C6	1620	50	0.10	125	16SVP39M	1000	
	56		8.0	6.9	E7	1890	45	0.12	179	16SVP56M	1000	
	82		8.0	6.9		2120	40	0.12	262	16SVP82M	1000	
	100		10.0	7.9	F8	2670	35	0.12	320	16SVP100M	500	
	150		10.0	7.9		3020	30	0.12	480	16SVP150M	500	
			10.0	7.9		3020	30	0.12	576	16SVP180MX	500	
	180		10.0	7.9		3640	20	0.15	576	16SVP180M	400	
	330		10.0	12.6	F12	4720	16	0.15	792	16SVP330M	400	
	20		10	5.0	5.9	B6	1020	120	0.10	100	20SVP10M	1500
			22	6.3	5.9	C6	1450	60	0.10	88	20SVP22M	1000
		27	6.3	5.9	1450		60	0.10	108	20SVP27M	1000	
		33	8.0	6.9	E7	1890	45	0.12	132	20SVP33M	1000	
		47	8.0	6.9		1890	45	0.12	188	20SVP47M	1000	
		56	10.0	7.9	F8	2400	40	0.12	224	20SVP56M	500	
		68	10.0	7.9		2400	40	0.12	272	20SVP68M	500	
100		8.0	11.9	E12		3320	24	0.15	400	20SVP100M	400	
150		10.0	12.6	F12	4320	20	0.15	600	20SVP150M	400		

※1: Ripple current (100 kHz/+105 °C) ※2: ESR (100 kHz to 300 kHz/+20 °C) ※3: tan δ (120 Hz/+20 °C) ※4: After 2 minutes  
 ◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications".

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
 EOL Models

### OS-CON

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide  
 Series system diagram  
 Products list

SVPT  
 SVF  
 SVPK  
 SXV  
 SVPG  
 SVPF  
 SVPA  
 SVPC  
 SVPB  
 SVPD  
 SVPS  
 SVPE  
 SVQP  
**SVP**

SEK  
 SEF  
 SEPG  
 SXE  
 SEPF  
 SEPC  
 SEQP  
 SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Radial lead type



High voltage (50 V max.)    Guaranteed at 125 °C 1000 h    RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications			
	C6	E7	E12	F13
Size code	C6	E7	E12	F13
Category temperature range	-55 °C to +125 °C			
Rated voltage range	25 V to 50 V			
Rated capacitance range	22 μF to 82 μF	33 μF to 120 μF	68 μF to 270 μF	120 μF to 470 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor (tan δ)	Please see the attached characteristics list			
Endurance	+125 °C, 1000 h, rated voltage applied			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 200 % of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit (after voltage processing)		

Surface mount type

## Marking and dimensions

Size code	φD ±0.5	L max	F ±0.5	φd ±0.05
C6	6.3	6.0	2.5	0.5
E7	8.0	7.0	3.5	0.5
E12	8.0	12.0	3.5	0.6
F13	10.0	13.0	5.0	0.6

※ Depends on the case size.

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram    Selection guide

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK**
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Part number
			φD	L		Ripple current ※1 (mA rms)	Allowable ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	
SEK	25	82	6.3	6.0	C6	960	3060	25	0.12	410	25SEK82M
		120	8.0	7.0	E7	1010	3200	24	0.12	600	25SEK120M
		270	8.0	12.0	E12	1470	4650	16	0.12	1350	25SEK270M
		470	10.0	13.0	F13	1590	5000	14	0.12	2350	25SEK470M
	35	47	6.3	6.0	C6	930	2950	27	0.12	329	35SEK47M
		82	8.0	7.0	E7	960	3060	25	0.12	574	35SEK82M
		180	8.0	12.0	E12	1260	4000	20	0.12	1260	35SEK180M
		330	10.0	13.0	F13	1390	4400	18	0.12	2310	35SEK330M
	50	22	6.3	6.0	C6	820	2600	35	0.12	220	50SEK22M
		33	8.0	7.0	E7	850	2700	35	0.12	330	50SEK33M
		68	8.0	12.0	E12	1200	3800	25	0.12	680	50SEK68M
		120	10.0	13.0	F13	1350	4300	20	0.12	1200	50SEK120M

※1: Ripple current (100 kHz/ +105 °C < Tx ≤ +125 °C) / Allowable ripple current (100 kHz/ Tx ≤ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Flow conditions" and "Taping specifications".

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.



High voltage (35 V max.)

Large capacitance (1000  $\mu\text{F}$  max.)

RoHS compliance, Halogen free

## Specifications

Items	Specifications			
	C6	E7	E12	F13
Size code	C6	E7	E12	F13
Category temperature range	-55 °C to +125 °C			
Rated voltage range	16 V to 35 V			
Rated capacitance range	22 $\mu\text{F}$ to 180 $\mu\text{F}$	39 $\mu\text{F}$ to 270 $\mu\text{F}$	82 $\mu\text{F}$ to 560 $\mu\text{F}$	120 $\mu\text{F}$ to 1000 $\mu\text{F}$
Capacitance tolerance	$\pm 20\%$ (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor ( $\tan \delta$ )	Please see the attached characteristics list			
Endurance	+125 °C, 1000 h, rated voltage applied			
	Capacitance change	Within $\pm 20\%$ of the initial value		
	$\tan \delta$	$\leq 200\%$ of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within $\pm 20\%$ of the initial value		
	$\tan \delta$	$\leq 150\%$ of the initial limit		
	DC leakage current	Within the initial limit (after voltage processing)		

## Marking and dimensions

Size code	$\phi D \pm 0.5$	L max	F $\pm 0.5$	$\phi d \pm 0.05$
C6	6.3	6.0	2.5	0.5
E7	8.0	7.0	3.5	0.5 <sup>*</sup>
E12	8.0	12.0	3.5	0.6
F13	10.0	13.0	5.0	0.6

※ Depends on the case size.  
※ 32SEF68M: 0.6 $\pm$ 0.05

## Characteristics list

Series	Rated voltage (V)	Rated capacitance ( $\mu\text{F}$ )	Case size (mm)		Size code	Specifications					Part number
			$\phi D$	L		Ripple current $\times 1$ (mA rms)	Allowable ripple current $\times 1$ (mA rms)	ESR $\times 2$ (m $\Omega$ max.)	$\tan \delta \times 3$	LC $\times 4$ ( $\mu\text{A}$ )	
SEF	16	180	6.3	6.0	C6	1040	3300	22	0.12	576	16SEF180M
		270	8.0	7.0	E7	1040	3300	22	0.12	864	16SEF270M
		560	8.0	12.0	E12	1560	4950	14	0.12	1792	16SEF560M
		1000	10.0	13.0	F13	1700	5400	12	0.12	3200	16SEF1000M
	20	120	6.3	6.0	C6	1010	3200	25	0.12	480	20SEF120M
		180	8.0	7.0	E7	1010	3200	25	0.12	720	20SEF180M
		390	8.0	12.0	E12	1560	4950	14	0.12	1560	20SEF390M
		560	10.0	13.0	F13	1700	5400	12	0.12	2240	20SEF560M
	25	56	6.3	6.0	C6	880	2800	30	0.12	280	25SEF56M
		82	8.0	7.0	E7	940	3000	28	0.12	410	25SEF82M
		180	8.0	12.0	E12	1470	4650	16	0.12	900	25SEF180M
		330	10.0	13.0	F13	1580	5000	14	0.12	1650	25SEF330M
32	68	8.0	7.0	E7	1010	3200	25	0.10	435	32SEF68M	
35	22	6.3	6.0	C6	820	2600	35	0.12	154	35SEF22M	
	39	8.0	7.0	E7	880	2800	30	0.12	273	35SEF39M	
	82	8.0	12.0	E12	1260	4000	20	0.12	574	35SEF82M	
	120	10.0	13.0	F13	1390	4400	18	0.12	840	35SEF120M	

※1: Ripple current (100 kHz/ +105 °C < Tx  $\leq$  +125 °C) / Allowable ripple current (100 kHz/ Tx  $\leq$  +105 °C) ※2: ESR (100 kHz to 300 kHz/+20 °C)

※3:  $\tan \delta$  (120 Hz/+20 °C) ※4: After 2 minutes

◆ Please refer to each page in this catalog for "Flow conditions" and "Taping specifications"

## Frequency correction factor for ripple current

Frequency	120 Hz $\leq f < 1$ kHz	1 kHz $\leq f < 10$ kHz	10 kHz $\leq f < 100$ kHz	100 kHz $\leq f \leq 500$ kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram

Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF**
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



High ripple current (6100 mA rms max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications			
Size code	C9	C10	E9	E13
Category temperature range	-55 °C to +105 °C			
Rated voltage range	16 V			
Rated capacitance range	270 μF		470 μF	560 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor (tan δ)	Please see the attached characteristics list			
Endurance	+105 °C, 5000 h, rated voltage applied			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit (after voltage processing)		

## Marking and dimensions

Surface mount type

Size code	φD ±0.5	L max	F ±0.5	φd ±0.05
C9	6.3	9.0	2.5	0.6
C10	6.3	10.0	2.5	0.5
E9	8.0	9.0	3.5	0.6
E13	8.0	13.0	3.5	0.6

※ Depends on the case size.

C9, C10, E9 Size flat rubber is used.

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Part number
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	
SEPG	16	270	6.3	8.9	C9	5040	10	0.12	864	16SEPG270W
			6.3	10.0	C10	5800	8	0.12	864	16SEPG270M
		470	8.0	8.9	E9	5400	8	0.12	1504	16SEPG470M
		560	8.0	12.9	E13	6100	8	0.12	1792	16SEPG560M

※1: Ripple current (100 kHz/ +105 °C)

※2: ESR (100 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Flow conditions" and "Taping specifications"

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.





## Specifications

Items	Specifications			
	E7	F8	E12	F13
Size code	E7	F8	E12	F13
Category temperature range	-55 °C to +125 °C			
Rated voltage range	63 V to 100 V			
Rated capacitance range	6.8 μF to 18 μF	15 μF to 39 μF	15 μF to 56 μF	18 μF to 100 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)			
Leakage current	Please see the attached characteristics list			
Dissipation factor(tan δ)	Please see the attached characteristics list			
Endurance	+125 °C, 1000 h, rated voltage applied			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 200 % of the initial limit		
	DC leakage current	Within the initial limit		
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage			
	Capacitance change	Within ±20 % of the initial value		
	tan δ	≤ 150 % of the initial limit		
	DC leakage current	Within the initial limit (after voltage processing)		

## Marking and dimensions

※ Depends on the case size.

Size code	φD ±0.5	L max	F ±0.5	φd ±0.05
E7	8.0	7.0	3.5	0.45
F8	10.0	8.0	5.0	0.50
E12	8.0	12.0	3.5	0.60
F13	10.0	13.0	5.0	0.60

## Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Part number
			φD	L		Ripple current ※1 (mA rms)	Allowable ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	
SXE	63	18	8.0	7.0	E7	340	1100	60	0.12	56	63SXE18M
		33	8.0	12.0	E12	930	2950	25	0.12	104	63SXE33M
		39	8.0	12.0	E12	930	2950	25	0.12	122	63SXE39M
			10.0	8.0	F8	690	2190	50	0.12	122	63SXE39MX
		56	8.0	12.0	E12	930	2950	25	0.12	176	63SXE56M
		68	10.0	13.0	F13	1030	3280	25	0.12	214	63SXE68M
	100	10.0	13.0	F13	1030	3280	25	0.12	315	63SXE100M	
	80	12	8.0	7.0	E7	340	1100	60	0.12	48	80SXE12M
		27	8.0	12.0	E12	780	2490	35	0.12	108	80SXE27M
			10.0	8.0	F8	660	2080	55	0.12	108	80SXE27MX
		33	8.0	12.0	E12	780	2490	35	0.12	132	80SXE33M
		47	10.0	13.0	F13	980	3100	28	0.12	188	80SXE47M
		56	10.0	13.0	F13	980	3100	28	0.12	224	80SXE56M
	100	6.8	8.0	7.0	E7	340	1100	60	0.12	34	100SXE6R8M
		15	10.0	8.0	F8	630	2000	60	0.12	75	100SXE15MX
			8.0	12.0	E12	730	2350	40	0.12	75	100SXE15M
		18	10.0	13.0	F13	940	3000	30	0.12	90	100SXE18M
			8.0	12.0	E12	730	2350	40	0.12	90	100SXE18MX
22		10.0	13.0	F13	940	3000	30	0.12	110	100SXE22M	
27		10.0	13.0	F13	940	3000	30	0.12	135	100SXE27M	

※1: Ripple current (100 kHz / +105 °C < Tx ≤ 125 °C), Allowable ripple current (100 kHz / Tx ≤ 105 °C)

※2: ESR (100 kHz to 300 kHz / +20 °C) ※3: tan δ (120 Hz / +20 °C) ※4: After 2 minutes

◆ Please refer to the P73 to 76 in this catalog for "Flow conditions" and "Taping specifications".

## Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP  
SEK  
SEF  
SEPG  
**SXE**  
SEPF  
SEPC  
SEQP  
SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type





High voltage (35 V max.)

Large capacitance (1000  $\mu\text{F}$  max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications				
	C55	C6	E7	E12	F13
Size code	C55	C6	E7	E12	F13
Category temperature range	-55 °C to +105 °C				
Rated voltage range	16 V to 32 V		16 V to 35V		
Rated capacitance range	22 $\mu\text{F}$ to 150 $\mu\text{F}$	22 $\mu\text{F}$ to 180 $\mu\text{F}$	39 $\mu\text{F}$ to 270 $\mu\text{F}$	82 $\mu\text{F}$ to 560 $\mu\text{F}$	120 $\mu\text{F}$ to 1000 $\mu\text{F}$
Capacitance tolerance	$\pm 20\%$ (120 Hz/+20 °C)				
Leakage current	Please see the attached characteristics list				
Dissipation factor (tan $\delta$ )	Please see the attached characteristics list				
Endurance	+105 °C, 5000 h, rated voltage applied				
	Capacitance change	Within $\pm 20\%$ of the initial value			
	tan $\delta$	$\leq 150\%$ of the initial limit			
	DC leakage current	Within the initial limit			
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage				
	Capacitance change	Within $\pm 20\%$ of the initial value			
	tan $\delta$	$\leq 150\%$ of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

## Marking and dimensions

※ Depends on the case size.

(unit : mm)

Size code	$\phi D \pm 0.5$	L max	F $\pm 0.5$	$\phi d \pm 0.05$
C55	6.3	5.5	2.5	0.45
C6	6.3	6.0	2.5	0.5
E7	8.0	7.0	3.5	0.5 ※
E12	8.0	12.0	3.5	0.6
F13	10.0	13.0	5.0	0.6

※ 32SEPF68M:  $0.6 \pm 0.05$

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF**
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Part number
			φD	L		Rated ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	
SEPF	16	150	6.3	5.5	C55	2590	30	0.12	480	16SEPF150M
		180	6.3	6.0	C6	3300	22	0.12	576	16SEPF180M
		270	8.0	7.0	E7	3300	22	0.12	864	16SEPF270M
		560	8.0	12.0	E12	4950	14	0.12	1792	16SEPF560M
		1000	10.0	13.0	F13	5400	12	0.12	3200	16SEPF1000M
	20	120	6.3	6.0	C6	3200	25	0.12	480	20SEPF120M
		180	8.0	7.0	E7	3200	25	0.12	720	20SEPF180M
		390	8.0	12.0	E12	4950	14	0.12	1560	20SEPF390M
		560	10.0	13.0	F13	5400	12	0.12	2240	20SEPF560M
	25	56	6.3	6.0	C6	2800	30	0.12	280	25SEPF56M
		82	8.0	7.0	E7	3000	28	0.12	410	25SEPF82M
		180	8.0	12.0	E12	4650	16	0.12	900	25SEPF180M
		330	10.0	13.0	F13	5000	14	0.12	1650	25SEPF330M
	32	22	6.3	5.5	C55	2400	35	0.12	140	32SEPF22M
		68	8.0	7.0	E7	3200	25	0.10	435	32SEPF68M
	35	22	6.3	6.0	C6	2600	35	0.12	154	35SEPF22M
		39	8.0	7.0	E7	2800	30	0.12	273	35SEPF39M
		82	8.0	12.0	E12	4000	20	0.12	574	35SEPF82M
		120	10.0	13.0	F13	4400	18	0.12	840	35SEPF120M

※1: Rated ripple current (100 kHz/ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆ Please refer to each page in this catalog for "Flow conditions" and "Taping specifications".

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP

SEK  
SEF  
SEPG  
SXE  
**SEPF**  
SEPC  
SEQP  
SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Super low ESR (5 mΩ max.)

Large capacitance (2700 μF max.)

RoHS compliance, Halogen free

## SP-Cap

## Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications								
Size code	B9	C55	C6	C9	E7	E9	E12	E13	F13
Category temperature range	-55 °C to +105 °C								
Rated voltage range (V)	2.5	6.3	2.5 to 16	6.3 to 16	2.5 to 16	16	2.5 to 6.3	2.5 to 16	
Rated capacitance range (μF)	100 to 560	220	100 to 560	100 to 820	150 to 1000	180 to 1000	180 to 270	470 to 820	470 to 2700
Capacitance tolerance	±20 % (120 Hz/+20 °C)								
Leakage current	Please see the attached characteristics list								
Dissipation factor (tan δ)	Please see the attached characteristics list								
Endurance	+105 °C, 5000 h, rated voltage applied								
	Capacitance change	Within ±20 % of the initial value							
	tan δ	≤ 150 % of the initial limit							
	DC leakage current	Within the initial limit							
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage								
	Capacitance change	Within ±20 % of the initial value							
	tan δ	≤ 150 % of the initial limit							
	DC leakage current	Within the initial limit (after voltage processing)							

Surface mount type

## Marking and dimensions

※ Depends on the case size.

E12, E13, F13 Size  $\phi d$

(unit : mm)

Size code	$\phi D \pm 0.5$	L max	F $\pm 0.5$	$\phi d \pm 0.05$
B9	5.0	9.0	2.0	0.6
C55	6.3	5.5	2.5	0.45
C6	6.3	6.0	2.5	0.45※1
C9	6.3	9.0	2.5	0.6
E7	8.0	7.0	3.5	0.6※2
E9	8.0	9.0	3.5	0.6
E12	8.0	12.0	3.5	0.6
E13	8.0	13.0	3.5	0.6
F13	10.0	13.0	5.0	0.6

※1 2SEPC390M: 0.5±0.05  
 ※2 16SEPC150MD, 10SEPC270M: 0.45±0.05

B9, C55, C6, C9, E7, E9 Size

B9, C55, C6, C9, E7, E9 Size flat rubber is used.

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram  
Selection guide

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC**
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Part number	
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)		
SEPC	2.5	100	5.0	9.0	B9	4180	7	0.10	500	2SEPC100MZ	
		330	5.0	9.0		4180	7	0.10	500	2SEPC330MZ	
		390	6.3	6.0	C6	3900	10	0.12	500	2SEPC390M	
		470	5.0	9.0	B9	4180	7	0.10	500	2SEPC470MZ	
		560	5.0	9.0		4180	7	0.10	500	2SEPC560MZ	
			6.3	6.0	C6	3900	10	0.12	500	2SEPC560M	
			6.3	9.0	C9	5600	7	0.10	500	2SEPC560MW	
		820	8.0	9.0	E9	4700	8	0.10	280	2SEPC560MX	
			6.3	9.0	C9	5600	7	0.10	500	2SEPC820MW	
			8.0	7.0	E7	5300	8	0.10	500	2SEPC820MD	
			8.0	9.0	E9	6100	7	0.10	500	2SEPC820MX	
			8.0	9.0		7200	5	0.10	500	2SEPC820MY	
		8.0	13.0	E13	6100	7	0.10	500	2R5SEPC820M		
		1000	8.0	9.0	E9	6100	7	0.10	500	2SEPC1000MX	
		2700	10.0	13.0	F13	5560	10	0.10	1350	2SEPC2700M	
		4	560	6.3	9.0	C9	5600	7	0.10	500	4SEPC560MW
				8.0	9.0	E9	6100	7	0.10	500	4SEPC560MX
				8.0	13.0	E13	6100	7	0.10	500	4SEPC560M
	680		8.0	13.0	6100		7	0.10	544	4SEPC680M	
	820		10.0	13.0	F13	6640	7	0.10	656	4SEPC820M	
	6.3	220	6.3	5.5	C55	2980	18	0.12	280	6SEPC220M	
			6.3	9.0	C9	5600	7	0.10	592	6SEPC470MW	
			8.0	9.0	E9	5700	8	0.10	592	6SEPC470MX	
			8.0	13.0	E13	5700	8	0.10	592	6SEPC470M	
		560	6.3	9.0	C9	5600	7	0.10	705	6SEPC560MW	
			8.0	9.0	E9	6100	7	0.10	705	6SEPC560MX	
		680	10.0	13.0	F13	6640	7	0.10	857	6SEPC680M	
		1000	8.0	7.0	E7	3530	18	0.10	1260	6SEPC1000MD	
	1500	10.0	13.0	F13	5560	10	0.10	1890	6SEPC1500M		
	10	270	8.0	7.0	E7	3220	22	0.12	500	10SEPC270MD	
	16	100	6.3	6.0	C6	2490	24	0.10	320	16SEPC100M	
			6.3	9.0	C9	4680	10	0.10	500	16SEPC100MW	
		150	8.0	7.0	E7	3220	22	0.12	500	16SEPC150MD	
		180	8.0	9.0	E9	5000	10	0.10	576	16SEPC180MX	
			8.0	12.0	E12	4360	16	0.10	576	16SEPC180M	
		220	8.0	7.0	E7	4150	13	0.10	500	16SEPC220MD	
			8.0	9.0	E9	5000	10	0.10	864	16SEPC270MX	
		270	8.0	12.0	E12	5000	11	0.10	864	16SEPC270M	
	470		10.0	13.0	F13	6100	10	0.10	1504	16SEPC470M	

※1: Ripple current (100 kHz/ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆ Please refer to each page in this catalog for "Flow conditions" and "Taping specifications".

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram

Products list

SVPT  
SVF  
SVPK  
SVX  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP

SEK  
SEF  
SEPG  
SXE  
SEPF  
**SEPC**  
SEQP  
SEP

Catalog EOL models


### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



High voltage (32 V max.)    Guaranteed at 125 °C 1000 h    RoHS compliance, Halogen free

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications				
Size code	C6	E7	F8	E12	F13
Category temperature range	-55 °C to +125 °C				
Rated voltage range	4 V to 20 V	4 V to 32 V			4 V to 20 V
Rated capacitance range	22 μF to 150 μF	6.8 μF to 330 μF	15 μF to 680 μF	18 μF to 560 μF	150 μF to 1200 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	Please see the attached characteristics list				
Dissipation factor (tan δ)	Please see the attached characteristics list				
Endurance	+125 °C, 1000 h/+105 °C, 5000 h, rated voltage applied				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram    Selection guide

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP**
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

## ● Marking and dimensions

(unit : mm)

Size code	φD ±0.5	L max	F ±0.5	φd ±0.05
C6	6.3	6.0	2.5	0.45
E7	8.0	7.0	3.5	0.45
F8	10.0	8.0	5.0	0.5
E12	8.0	12.0	3.5	0.6
F13	10.0	13.0	5.0	0.6

※ Depends on the case size.

## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications					Part number
			φD	L		Ripple current ※1 (mA rms)	Allowable ripple current※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	
SEQP	4	150	6.3	6.0	C6	572	1810	40	0.12	300	4SEQP150M
		330	8.0	7.0	E7	810	2560	35	0.12	660	4SEQP330M
		560	8.0	12.0	E12	1430	4520	13	0.15	448	4SEQP560M
		680	10.0	8.0	F8	1170	3700	25	0.12	544	4SEQP680M
		1200	10.0	13.0	F13	1721	5440	12	0.18	960	4SEQP1200M
	6.3	82	6.3	6.0	C6	537	1700	45	0.12	258	6SEQP82M
		150	8.0	7.0	E7	810	2560	35	0.12	472	6SEQP150M
		330	10.0	8.0	F8	1170	3700	25	0.12	416	6SEQP330M
		470	8.0	12.0	E12	1332	4210	15	0.15	592	6SEQP470M
		820	10.0	13.0	F13	1721	5440	12	0.15	775	6SEQP820M
	10	56	6.3	6.0	C6	537	1700	45	0.12	280	10SEQP56M
		120	8.0	7.0	E7	810	2560	35	0.12	600	10SEQP120M
		270	10.0	8.0	F8	1170	3700	25	0.12	540	10SEQP270M
		330	8.0	12.0	E12	1250	3950	17	0.15	660	10SEQP330M
		560	10.0	13.0	F13	1655	5230	13	0.15	840	10SEQP560M
	16	39	6.3	6.0	C6	512	1620	50	0.10	312	16SEQP39M
		82	8.0	7.0	E7	670	2120	40	0.12	656	16SEQP82M
		150	10.0	8.0	F8	955	3020	30	0.12	480	16SEQP150M
		180	8.0	12.0	E12	1151	3640	20	0.15	576	16SEQP180M
		330	10.0	13.0	F13	1493	4720	16	0.15	792	16SEQP330M
	20	22	6.3	6.0	C6	458	1450	60	0.10	220	20SEQP22M
		47	8.0	7.0	E7	598	1890	45	0.12	470	20SEQP47M
		68	10.0	8.0	F8	759	2400	40	0.12	272	20SEQP68M
		100	8.0	12.0	E12	1050	3320	24	0.15	400	20SEQP100M
		150	10.0	13.0	F13	1367	4320	20	0.15	600	20SEQP150M
	32	6.8	8.0	7.0	E7	440	1400	100	0.10	44	32SEQP6R8M
		15	10.0	8.0	F8	560	1800	80	0.10	96	32SEQP15M
		18	8.0	12.0	E12	790	2500	50	0.12	115	32SEQP18M

※1: Ripple current (100 kHz/ +105 °C < Tx ≤ +125 °C) / Allowable ripple current (100 kHz/ Tx ≤ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram

Products list  
SVPT  
SVF  
SVPK  
SXV  
SVPG  
SVPF  
SVPA  
SVPC  
SVPB  
SVPD  
SVPS  
SVPE  
SVQP  
SVP  
SEK  
SEF  
SEPG  
SXE  
SEPF  
SEPC  
**SEQP**  
SEP

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



Standard    Guaranteed at 105 °C 3000 h    RoHS compliance, Halogen free

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications				
	C6	E7	F8	E12	F13
Size code	C6	E7	F8	E12	F13
Category temperature range	-55 °C to +105 °C				
Rated voltage range	4 V to 20 V			2.5 V to 20 V	
Rated capacitance range	22 μF to 150 μF	33 μF to 330 μF	56 μF to 680 μF	100 μF to 680 μF	150 μF to 1500 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	Please see the attached characteristics list				
Dissipation factor (tan δ)	Please see the attached characteristics list				
Endurance	+105 °C, 3000 h, rated voltage applied (2.5 V 2000 h applied)				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit			
Damp heat (Steady state)	+60 °C, 90 % to 95 %, 1000 h, No-applied voltage				
	Capacitance change	Within ±20 % of the initial value			
	tan δ	≤ 150 % of the initial limit			
	DC leakage current	Within the initial limit (after voltage processing)			

## ● Marking and dimensions

※ Depends on the case size.

(unit : mm)

Size code	φD ±0.5	L max	F ±0.5	φd ±0.05
C6	6.3	6.0	2.5	0.45
E7	8.0	7.0	3.5	0.45
F8	10.0	8.0	5.0	0.5
E12	8.0	12.0	3.5	0.6
F13	10.0	13.0	5.0	0.6

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram    Selection guide

### Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP**

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type



## ● Characteristics list

Series	Rated voltage (V)	Rated capacitance (μF)	Case size (mm)		Size code	Specifications				Part number
			φD	L		Ripple current ※1 (mA rms)	ESR ※2 (mΩ max.)	tan δ ※3	LC ※4 (μA)	
SEP	2.5	680	8.0	12.0	E12	4520	13	0.15	340	2R5SEP680M
		1500	10.0	13.0	F13	5440	12	0.18	750	2R5SEP1500M
	4	100	6.3	6.0	C6	1810	40	0.12	200	4SEP100M
		150	6.3	6.0		1810	40	0.12	300	4SEP150M
		220	8.0	7.0	E7	2560	35	0.12	440	4SEP220M
		330	8.0	7.0		2560	35	0.12	660	4SEP330M
		470	10.0	8.0	F8	3700	25	0.12	376	4SEP470M
		560	8.0	12.0	E12	4520	13	0.15	448	4SEP560M
		680	10.0	8.0	F8	3700	25	0.12	544	4SEP680M
		1200	10.0	13.0	F13	5440	12	0.18	960	4SEP1200M
	6.3	82	6.3	6.0	C6	1700	45	0.12	258	6SEP82M
		150	8.0	7.0	E7	2560	35	0.12	472	6SEP150M
		330	10.0	8.0	F8	3700	25	0.12	416	6SEP330M
		470	8.0	12.0	E12	4210	15	0.15	592	6SEP470M
		820	10.0	13.0	F13	5440	12	0.15	775	6SEP820M
	10	56	6.3	6.0	C6	1700	45	0.12	280	10SEP56M
		120	8.0	7.0	E7	2560	35	0.12	600	10SEP120M
		270	10.0	8.0	F8	3700	25	0.12	540	10SEP270M
		330	8.0	12.0	E12	3950	17	0.15	660	10SEP330M
		560	10.0	13.0	F13	5230	13	0.15	840	10SEP560M
	16	39	6.3	6.0	C6	1620	50	0.10	312	16SEP39M
		82	8.0	7.0	E7	2120	40	0.12	656	16SEP82M
		150	10.0	8.0	F8	3020	30	0.12	480	16SEP150M
		180	8.0	12.0	E12	3640	20	0.15	576	16SEP180M
		330	10.0	13.0	F13	4720	16	0.15	792	16SEP330M
	20	22	6.3	6.0	C6	1450	60	0.10	220	20SEP22M
		33	8.0	7.0	E7	1890	45	0.12	330	20SEP33M
		47	8.0	7.0		1890	45	0.12	470	20SEP47M
		56	10.0	8.0	F8	2400	40	0.12	224	20SEP56M
		68	10.0	8.0		2400	40	0.12	272	20SEP68M
100		10.0	8.0	2570		35	0.12	400	20SEP100MX	
		8.0	12.0	E12		3320	24	0.15	400	20SEP100M
150		10.0	13.0	F13	4320	20	0.15	600	20SEP150M	

※1: Ripple current (100 kHz/ +105 °C)

※2: ESR (100 kHz to 300 kHz/+20 °C)

※3: tan δ (120 Hz/+20 °C)

※4: After 2 minutes

◆Please refer to each page in this catalog for "Flow conditions" and "Taping specifications".

## ● Frequency correction factor for ripple current

Frequency	120 Hz ≤ f < 1 kHz	1 kHz ≤ f < 10 kHz	10 kHz ≤ f < 100 kHz	100 kHz ≤ f ≤ 500 kHz
Coefficient	0.05	0.3	0.7	1

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Line-up  
Series system diagram

Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVQ
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP**

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

# Catalog EOL Models

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

The following table is a list of our parts which have been deleted from our catalogs. If you are using any of the following models, please substitute with the suggested alternative model/series.

Also, we have announced the end of life of aluminum solid capacitors with organic semiconductive electrolyte. We hope alternative parts (Aluminum Solid Capacitors with Organic Semiconductive Electrolyte) will continue to serve your needs.

Thank you very much.

### ●The list of alternatives for higher voltage

Series	Size code	Models for deletion	Year of deletion	Alternative model
SVP	A5	6SVP15M	2002	10SVP15M
		4SVP22M	2002	6SVP22M
	B6	10SVP22M	2002	16SVP22M
		6SVP33M	2002	10SVP33M
	C6	6SVP56M	2002	10SVP56M
		4SVP100M	2002	6SVP82M
		10SVP82M	2002	4SVP150MX
	E7	6SVP120M	2002	16SVP82M
		6SVP150M	2002	10SVP120M
		4SVP150M	2002	10SVP150MX
		4SVP220M	2002	10SVP150MX
	F8	4SVP470M	2002	6SVP220MX
6SVQP150M		2002	10SVQP150M	
SVQP	E7	4SVQP220M	2007	6SVQP220M
		2SEPC330MW	2007	2SEPC560MW
SEPC	C9			

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OSCON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

- SVPT
- SVF
- SVPK
- SXV
- SVPG
- SVPF
- SVPA
- SVPC
- SVPB
- SVPD
- SVPS
- SVPE
- SVQP
- SVP
- SEK
- SEF
- SEPG
- SXE
- SEPF
- SEPC
- SEQP
- SEP

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

### ●The list of alternatives to 25V products

Series	Size code	Models for deletion	Year of deletion	Alternative model
SVP	C6	25SVP6R8M	2013	SVPD Series SVPF Series
	E7	25SVP10M	2013	
	F8	25SVP22M	2013	
	E12	25SVP33M	2013	
	F12	25SVP56M	2013	
SEP	C6	25SEP6R8M	2013	SEPF Series
	E7	25SEP10M	2013	
	F8	25SEP22M	2013	
	E12	25SEP33M	2013	
	F13	25SEP56M	2013	

### ●End of life/ Aluminum Solid Capacitors with Organic Semiconductive Electrolyte

Series	Size code	Status
SZP	All size	EOL
SF		
SP		
SC		
SA		
SL		
SH		
S		
SG		
SPA		
SM		
SN		
SV		





# Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

# Hybrid

SP-Cap™

## Applications

### Main market



Communications infrastructure




Automotive



Industrial equipment



Desktop computer



Audio / Visual



Server



Home appliance



Industrial robot

POSCAP™

OS-CON™

Selection guide	P121	Guidelines and Precautions
	P125	Mounting specifications
	P127	Packing specifications
	P127	Line-up
Surface mount type	P129	Series system diagram
	P130	Products list
	P131	ZA
	P133	ZC
	P135	ZK
	P137	ZKU
	P139	ZE
Radial lead type	P141	ZS
	P143	ZF



## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up	Selection guide
ZA	Surface mount type
ZC	
ZK	
ZKU	
ZE	
ZS	
ZF	Radial lead type

## ⚠ Application Guidelines

### 1. Circuit design

#### 1-1 Operating temperature and frequency

Electrical parameters for electrolytic capacitors are normally specified at 20 °C temperature and 120 Hz frequency. These parameters vary with changes in temperature and frequency. Circuit designers should take these changes into consideration.

- (1) Effects of operating temperature on electrical parameters
  - (a) At higher temperatures, leakage current and capacitance increase while equivalent series resistance (ESR) decreases.
  - (b) At lower temperatures, leakage current and capacitance decrease while equivalent series resistance (ESR) increases.
- (2) Effects of frequency on electrical parameters
  - (a) At higher frequency capacitance and impedance decrease while  $\tan \delta$  increases.
  - (b) At lower frequency, heat generated by ripple current will rise due to an increase in equivalent series resistance (ESR).

#### 1-2 Operating temperature and life expectancy

- (1) Expected life is affected by operating temperature. Generally, each 10 °C reduction in temperature will double the expected life. Use capacitors at the lowest possible temperature below the upper category temperature.
- (2) If operating temperatures exceed the upper category limit, rapid deterioration of electrical parameter will occur and irreversible damage will result.  
Check for the maximum capacitor operating temperatures including ambient temperature, internal capacitor temperature rise due to ripple current, and the effects of radiated heat from power transistors, IC's or resistors. Avoid placing components, which could conduct heat to the capacitor from the back side of the circuit board.
- (3) The formula for calculating expected life at lower operating temperatures is as follows ;

$$L_2 = L_1 \times 2^{\frac{T_1 - T_2}{10}}$$

$L_1$ : Guaranteed life (h) at temperature,  $T_1$  °C

$L_2$ : Expected life (h) at temperature,  $T_2$  °C

$T_1$ : Upper category temperature + temperature rise due to rated ripple current (°C)

$T_2$ : Actual operating temperature, ambient temperature + temperature rise due to ripple current heating (°C)

- (4) Using the capacitor beyond the estimated lifetime will result in short circuit, electrolyte leak, vent open, and large deterioration of characteristics. The lifetime cannot go above 15 years due to aging of sealing rubber.

#### 1-3 Load Conditions to Avoid

The following load conditions will cause rapid deterioration of capacitor's electrical characteristics.

In addition, instantaneous heating and gas generation within the capacitor may cause an operation of pressure relief vent, and that results in electrolyte leaks, explosion and/or fire ignition.

The leaked electrolyte is combustible and electrically conductive.

- (1) Reverse Voltage  
DC capacitors have polarity. Therefore, do not apply the reverse voltage. Find the correct polarity before insertion.
- (2) Charge / Discharge Applications  
General purpose capacitors are not suitable for use in repeating charge/discharge applications. For such applications, consult a sales representative with actual application condition.  
Rush current must not exceed 100 A.
- (3) ON-OFF circuit  
When using capacitors in circuit where ON-OFF switching is repeated more than 10,000 times a day, consult a sales representative with actual application condition for an appropriate choice of capacitors.
- (4) Over voltage  
Do not apply a voltage exceeding the rated voltage. The rated surge voltage can be applied only for a short time. Make sure that a sum of the DC voltage and the superimposed AC ripple voltage does not exceed the rated voltage.
- (5) Ripple Current  
Do not apply ripple currents exceeding the rated value. Make sure that rated ripple currents superimposed on low DC bias voltages do not cause reverse voltage conditions.  
Even if the current is below the rated ripple current, using the capacitor for longer than the rated lifetime will cause ESR increase and internal generation of heat.

#### 1-4 Using Two or More Capacitors in Parallel

The circuit board pattern of wiring to each capacitor may make various impedance values and cause unbalanced ripple current loads among the capacitors. Careful wiring methods can minimize the potential risk of an excessive ripple current concentrated to one capacitor. The capacitors cannot be used in series.

#### 1-5 Capacitor mounting considerations

- (1) Double-Sided Circuit Boards  
Avoid wiring pattern runs, which pass between the mounted capacitor and the circuit board.
- (2) Clearance for Case Mounted Pressure Relief ( $\geq \phi 10$  mm)  
Capacitors with case mounted pressure relief require sufficient clearance to allow for proper pressure relief operation. The minimum clearance are dependent on capacitor diameters as follows.  
·  $\geq \phi 10$  mm : 2 mm minimum

- (3) Wiring Near the Pressure Relief ( $\geq \phi 10$  mm)

Avoid locating high voltage or high current wiring or circuit board paths above the pressure relief .  
Flammable, high temperature gas that exceeds 100° C may be released which could dissolve the wire insulation and ignite.

- (4) Circuit Board Patterns Under the Capacitor

Avoid circuit board runs under the capacitor, as an electrical short can occur due to an electrolyte leakage.

### 1-6 Electrical insulation

Electrically isolate the capacitor's case from cathode/anode terminals, as well as circuit patterns.

### 1-7 Capacitor sleeve

The laminate coating is intended for marking and identification purposes and is not meant to electrically insulate the capacitor.

## 2.Capacitor handling techniques

### 2-1 Considerations before using

- (1) Capacitors have a finite life. Do not reuse or recycle capacitors from used equipment.
- (2) Transient recovery voltage may be generated in the capacitor due to dielectric absorption.  
If required, this voltage can be discharged with a resistor with a value of about 1 kΩ.
- (3) Capacitors stored for a long period of time may exhibit an increase in leakage current.  
This can be corrected by gradually applying rated voltage in series with a resistor of approximately 1 kΩ.
- (4) If capacitors are dropped, they can be damaged mechanically or electrically. Avoid using dropped capacitors.
- (5) Dented or crushed capacitors should not be used.  
The seal integrity can be damaged and loss of electrolyte/ shortened life can result.

### 2-2 Capacitor insertion

- (1) Verify the correct capacitance and rated voltage of the capacitor.
- (2) Verify the correct polarity of the capacitor before insertion.
- (3) Verify the correct terminal dimension and land pattern size before mount to avoid stress on the terminals.
- (4) Excessive mounting pressure can cause high leakage current, short circuit, or disconnection.

### 2-3 Reflow soldering

- (1) Surface-mount type capacitor are exclusively for reflow soldering.  
When reflow solder is used an ambient heat condition system such as the simultaneous use of infrared and hot-air is recommended.
- (2) Observe proper soldering conditions (temperature, time, etc.). Do not exceed the specified limits.  
If the peak temperature is high or if the heating time is long, it may cause deterioration of the electrical characteristics and life characteristics.  
Recommended soldering condition is a guideline for ensuring the basic characteristics of the components, but not for the stable soldering conditions. Conditions for proper soldering should be set up according to individual conditions.  
※The Temperature on Capacitor top shall be measured by using thermal couple that is fixed firmly by epoxy glue.
- (3) In case of use in 2 times reflow, 2nd reflow must be done when the capacitor's temperature return back to normal level.
- (4) In our recommended reflow condition , the case discoloration and the case swelling might be slightly generated.  
But please acknowledge that these two phenomena do not influence the reliability of the product.
- (5) The crack on top marking might be occurred by reflow heat stress.  
But please acknowledge that it does not influence the reliability of the product.
- (6) VPS (Vapor Phase Soldering) reflow can cause significant characteristics change and/ or mounting failure due to deformation by acute temperature rise.  
VPS is acceptable provided that the process does not exceed recommended reflow profile and temperature rise is less than 3 deg/sec.  
Please contact Panasonic for detailed conditions.
- (7) The vibration-proof capacitors of size  $\phi 6.3$  has support terminals extending from the bottom side to the lead edge. Then, make sure to find appropriate soldering conditions to form fillet on the support terminals if required for appearance inspection. However, even if sufficient solder fillets are not observed, the reliability of vibration-proof will not be lowered because the support terminals on the bottom side enhance the solder joint to circuit board.

### 2-4 Manual soldering

- (1) Observe temperature and time soldering specifications or do not exceed temperature of 350 °C for 3 seconds or less.
- (2) If a soldered capacitor must be removed and reinserted, avoid excessive stress on the capacitor leads.
- (3) Avoid physical contacts between the tip of the soldering iron and capacitors to prevent or capacitor failure.

### 2-5 Capacitor handling after soldering

- (1) Avoid moving the capacitor after soldering to prevent excessive stress on the lead wires where they enter the seal.
- (2) Do not use the capacitor as a handle when moving the circuit board assembly.
- (3) Avoid striking the capacitor after assembly to prevent failure due to excessive shock.

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

Surface mount type  
ZA  
ZC  
ZK  
ZKU  
ZE  
ZS  
Radial lead type  
ZF



# Guidelines and Precautions

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

ZA

ZC

ZK

ZKU

ZE

ZS

ZF

Selection guide

Surface mount type

Radial lead type

## 2-6 Circuit board cleaning

- (1) Circuit boards can be immersed or ultrasonically cleaned using suitable cleaning solvents for up to 5 minutes and up to 60 °C maximum temperatures. The boards should be thoroughly rinsed and dried. The use of ozone depleting cleaning agents is not recommended for the purpose of protecting our environment.
- (2) Avoid using the following solvent groups unless specifically allowed in the specification ;
  - (a) Halogenated cleaning solvents : except for solvent resistant capacitor types, halogenated solvents can permeate the seal and cause internal capacitor corrosion and failure.  
For solvent resistant capacitors, carefully follow the temperature and time requirements based on the specification. 1-1-1 trichloroethane should never be used on any aluminum electrolytic capacitor.
  - (b) Alkaline solvents : could react and dissolve the aluminum case.
  - (c) Petroleum based solvents : deterioration of the rubber seal could result.
  - (d) Xylene : deterioration of the rubber seal could result.
  - (e) Acetone : removal of the ink markings on the vinyl sleeve could result.
- (3) A thorough drying after cleaning is required to remove residual cleaning solvents that may be trapped between the capacitor and the circuit board. Avoid drying temperatures, which exceed the Upper category temperature of the capacitor.
- (4) Monitor the contamination levels of the cleaning solvents during use in terms of electrical conductivity, pH, specific gravity, or water content.  
Chlorine levels can rise with contamination and adversely affect the performance of the capacitor.
- (5) Depending on the cleaning method, the marking on a capacitor may be erased or blurred.  
Please consult us if you are not certain about acceptable cleaning solvents or cleaning methods.

## 2-7 Mounting Adhesives and Coating Agents

When using mounting adhesives or coating agents to control humidity, avoid using materials containing halogenated solvents. Also, avoid the use of chloroprene based polymers.  
Cure or dry out the coating agents thoroughly, and do not leave any solvents. Make sure to dry out cleaning agents completely immediately after washing the circuit board if the capacitors are mounted afterward, so that the solvents are not left under the capacitor body.  
Leave more than 1/3 of the sealing portion open, and do not cover that portion with any adhesives or coating.

## 2-8 Fumigation

In exporting electronic appliances with aluminum electrolytic capacitors, in some cases fumigation treatment using such halogen compound as methyl bromide is conducted for wooden boxes.  
If such boxes are not dried well, the halogen left in the box is dispersed while transported and enters in the capacitors inside.  
This possibly causes electrical corrosion of the capacitors. Therefore, after performing fumigation and drying make sure that no halogen is left.  
Don't perform fumigation treatment to the whole electronic appliances packed in a box.

## 2-9 Flux

If you use a halogen type (Chlorine type, Bromine type, etc.) high-activity flux, please use it after confirmation in advance, as it may have an impact on performance and reliability of this product due to the residue of the flux.

## 3. Precautions for using capacitors

### 3-1 Environmental conditions

Capacitors should not be stored or used in the following environments.

- (1) Exposure to temperatures above the upper category or below the lower category temperature of the capacitor.
- (2) Direct contact with water, salt water, or oil.
- (3) High humidity conditions where water could condense on the capacitor.
- (4) Exposure to toxic gases such as hydrogen sulfide, sulfuric acid, nitric acid, chlorine, Chlorine compound, Bromine, Bromine compound or ammonia.
- (5) Exposure to ozone, radiation, or ultraviolet rays.
- (6) Vibration and shock conditions exceeding specified requirements.

Even within the specified requirements, a large vibration acceleration may be applied due to resonance, so be sure to evaluate and confirm with the actual product.

### 3-2 Electrical precautions

- (1) Avoid touching the terminals of a capacitor as a possible electric shock could result.  
The exposed aluminum case is not insulated and could also cause electric shock if touched.
- (2) Avoid short circuiting the area between the capacitor terminals with conductive materials including liquids such as acids or alkaline solutions.
- (3) A low-molecular-weight-siloxane which is included in a silicon material shall causes abnormal electrical characteristics.

## 4. Emergency procedures

- (1) If the pressure relief of the capacitor operates, immediately turn off the equipment and disconnect from the power source.  
This will minimize an additional damage caused by the vaporizing electrolyte.
- (2) Avoid contact with the escaping electrolyte gas, which can exceed 100 °C temperatures.  
If electrolyte or gas enters the eye, immediately flush the eye with large amounts of water.  
If electrolyte or gas is ingested by mouth, gargle with water.  
If electrolyte contacts the skin, wash with soap and water.

## 5. Long term storage

- (1) Expiration date is 42 months from outgoing inspection date. Leakage current of a capacitor tends to increase with long periods of storage due to dielectric dissolution. Very high current may flow at the first voltage load after the expiration date. However, applying voltage will reform the dielectric, and the leakage current will return to the initial level. Storage condition is to keep in room temperature (5 °C to 35 °C) and humidity (45 % to 85 %) with no direct sunshine.
- (2) Environmental Conditions  
Do not store under condition outside the area described in the specification, and also under conditions listed below.
  - (a) Exposure to temperatures above the upper category or below the lower category temperature of the capacitor.
  - (b) Direct contact with water, salt water, or oil.
  - (c) High humidity conditions where water could condense on the capacitor.
  - (d) Exposure to toxic gases such as hydrogen sulfide, sulfuric acid, nitric acid, chlorine, Chlorine compound, Bromine, Bromine compound or ammonia.
  - (e) Exposure to ozone, radiation, or ultraviolet rays.
  - (f) Vibration and shock conditions exceeding specified requirements.

## 6. Capacitor disposal

When disposing capacitors, use one of the following methods.

- (1) Incinerate after crushing the capacitor or puncturing the can wall (to prevent explosion due to internal pressure rise).
- (2) Dispose as solid waste.

NOTE : Local laws may have specific disposal requirements which must be followed.

The precautions in using aluminum electrolytic capacitors follow the "Safety application guide for the use in fixed aluminum electrolytic capacitors for electronic equipment", RCR-2367D issued by JEITA in October 2017. Please refer to the above application guide for details.

### ■ AEC-Q200 compliant

The products are tested based on all or part of the test conditions and methods defined in AEC-Q200. Please consult with Panasonic for the details of the product specification and specific evaluation test results, etc., and please review and approve Panasonic's product specification before ordering.

## Intellectual property right

We, Panasonic Group are providing the product and service that customers can use without anxiety, and are working positively on the protection of our products under intellectual property rights.  
Representative patents relating to **Conductive Polymer Hybrid Aluminum Electrolytic Capacitors** are as follows:

US Patent No. 7497879, 7621970, 9208954, 10262806  
JP Patent No. 5360250  
EP Patent No. 1808875, 2698802

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

Surface mount type  
ZA  
ZC  
ZK  
ZKU  
ZE  
ZS  
Radial lead type  
ZF

# Mounting specifications

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

## Hybrid


Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list  
ZA  
ZC  
ZK  
ZKU  
ZE  
ZS  
ZF

Selection guide  
Surface mount type  
Radial lead type

### Reflow guaranteed condition (SMD type)

#### RoHS compliant

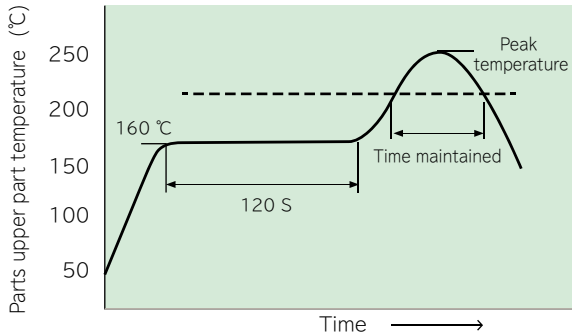

Size code	C, D, D8	F, G, G16	
Peak temperature	260 °C (255 °C)	245 °C	260 °C
Time in peak temperature	≥ 250 °C 5 s (10 s)	≥ 240 °C 10 s	≥ 250 °C 5 s
Time maintained	≥ 230 °C 30 s	≥ 230 °C 30 s	≥ 230 °C 30 s
	≥ 217 °C 40 s	≥ 217 °C 40 s	≥ 217 °C 40 s
	≥ 200 °C 70 s	≥ 200 °C 70 s	≥ 200 °C 70 s
Time of reflow	2 times	2 times	1 time

※For reflow, use a thermal condition system such as infrared radiation (IR) or hot blast.  
※Panasonic have several series available for pure Tin terminal and ZVEI reflow based on J-STD-020D (JEDEC). (Please contact sales for details.)

### Flow soldering condition (Radial lead type)


#### RoHS compliant

	Temperature	Time	Flow number
Soldering condition	260°C + 5°C or less	10 sec + 1 sec or less	1 time

### Dimensions (Vibration-proof products)

The size and shape are different from standard products.


#### ● Size code: D, D8

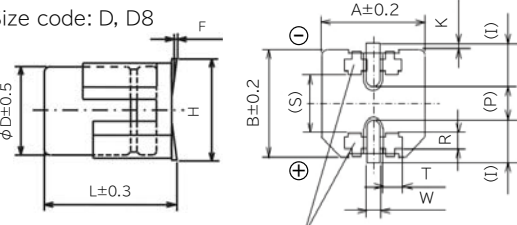

(Unit : mm)

Size code	φ D	L	A, B	H max.	F	I	W
D	6.3	6.1	6.6	7.8	0 to +0.15	2.4	0.65±0.1
D8	6.3	8.0	6.6	7.8	0 to +0.15	2.4	0.65±0.1
F	8.0	10.5	8.3	10.0	0 to +0.15	3.4	1.2±0.2
G	10.0	10.5	10.3	12.0	0 to +0.15	3.5	1.2±0.2
G16	10.0	16.8	10.3	11.0±0.2	0 to +0.15	3.2	1.2±0.2

#### ● Size code: F, G, G16

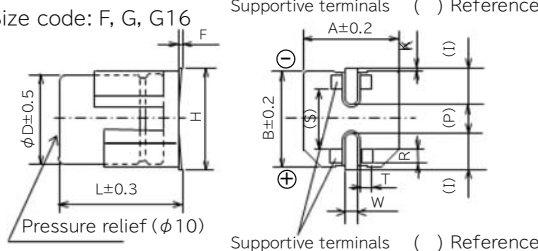


(Unit : mm)

Size code	P	K	R	S	T
D	2.2	0.35 <sup>+0.15</sup> <sub>-0.20</sub>	1.1±0.2	3.3	1.05±0.2
D8	2.2	0.35 <sup>+0.15</sup> <sub>-0.20</sub>	1.1±0.2	3.3	1.05±0.2
F	3.1	0.7±0.2	0.7±0.2	5.3	1.3±0.2
G	4.6	0.7±0.2	0.7±0.2	6.9	1.3±0.2
G16	4.6	----	0.7±0.2	6.9	1.3±0.2

### Land/Pad pattern

The circuit board land/pad pattern size for chip capacitors is specified in the following table. The land pitch influences installation strength.

#### Standard products

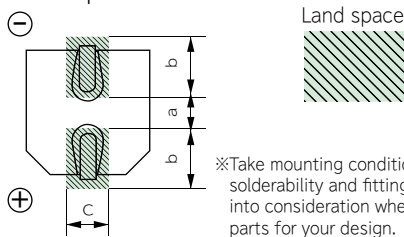

※Take mounting conditions, solderability and fitting strength into consideration when selecting parts for your design.


(Unit : mm)

Size code	a	b	c
C (φ 5×L5.8)	1.5	2.8	1.6
D (φ 6.3×L5.8)	1.8	3.2	1.6
D8 (φ 6.3×L7.7)	1.8	3.2	1.6
F (φ 8×L10.2)	3.1	4.0	2.0
G (φ 10×L10.2)	4.6	4.1	2.0
G16 (φ 10×L16.5)	4.6	4.1	2.0

Larger dimension of "a" may prevent back fillet from being formed adequately to obtain required solder strength.

#### Vibration-proof products

#### ● Size code: D, D8      ● Size code: F, G, G16

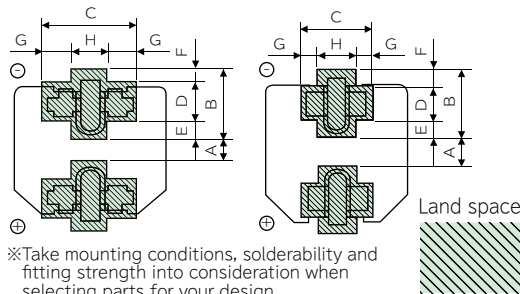

※Take mounting conditions, solderability and fitting strength into consideration when selecting parts for your design.

(Unit : mm)

Size code	A	B	C	D	E	F	G	H
D (φ 6.3×L6.1)	1.2	3.6	3.2	2.0	0.95	0.65	1.0	1.2
D8 (φ 6.3×L8.0)	1.2	3.6	3.2	2.0	0.95	0.65	1.0	1.2
F (φ 8×L10.5)	2.7	4.0	4.7	1.3	1.0	1.7	1.1	2.5
G (φ 10×L10.5)	3.9	4.4	4.7	1.3	1.2	1.9	1.1	2.5
G16 (φ 10×L16.8)	3.9	4.4	4.7	1.3	1.2	1.9	1.1	2.5


Larger dimension of "a" may prevent back fillet from being formed adequately to obtain required solder strength.

※The vibration-proof capacitors of size φ6.3 has support terminals extending from the bottom side to the lead edge. Then, make sure to find appropriate soldering conditions to form fillet on the support terminals if required for appearance inspection.

# Packing specifications

## Packaging specifications


### Reel Dimensions (not to scale)

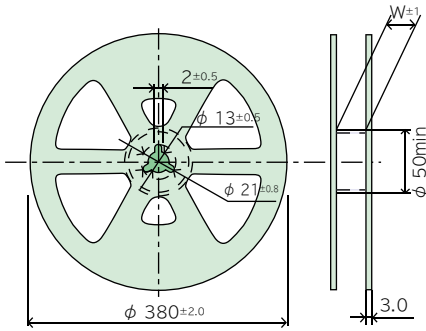

(Unit : mm)

Size code	W
C	14.0
D, D8	18.0
F, G, G16	26.0

### Dimensions of Outer Carton Box




(Unit : mm)

Size code	H	W,L
C	220	395
D, D8	250	395
F, G, G16	220	395

### Min.Packing Quantity

Size code	Min.Packing Q'ty pcs.
C, D	1000
D8	900
F, G	500
G16	250

### Taping Dimensions in mm

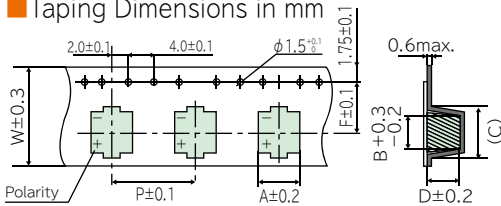

※Ask factory for technical specifications.  
( ) Reference

(Unit : mm)

Size code	A	B	C	D	P	F	W
C	5.7	5.7	8.0	6.4	12.0	5.5	12.0
D	7.0	7.0	9.0	6.4	12.0	7.5	16.0
D8	7.0	7.0	9.0	8.4	12.0	7.5	16.0
F	8.7	8.7	12.5	11.0	16.0	11.5	24.0
G	10.7	10.7	14.5	11.0	16.0	11.5	24.0
G16	10.7	10.7	14.5	17.5	20.0	11.5	24.0

## Radial lead type

### Packing quantity

Size code	Quantity (pcs. / Bag)	Quantity (pcs. / Box)
F (φ 8×L9.5)	200	4000
G (φ 10×L9.5)	200	2000

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

ZA  
ZC  
ZK  
ZKU  
ZE  
ZS  
ZF

# Line-up

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

### Surface mount type (V type)

Series	Page	Part No.	Features	Small size	Large capacitance	High ripple	High temperature	Long life	Category temperature range (°C)
ZA	131 to 132	EEHZA---	Low ESR High ripple current Long life 105 °C 10,000 h	●					-55 to 105
ZC	133 to 134	EEHZC---	Low ESR High ripple current Long life 125 °C 4,000 h	●				●	-55 to 125
ZK	135 to 136	EEHZK---	Large capacitance High ripple current Long life 125 °C 4,000 h	●	●	●		●	-55 to 125
ZKU	137 to 138	EEHZK--U-	Large capacitance Long life 125 °C 4,000 h	●	●	●		●	-55 to 125
ZE	139 to 140	EEHZE---	145 °C 2,000 h 135 °C 4,000 h				●	●	-55 to 145
ZS	141 to 142	EEHZS---	125 °C 4,000 h		●	●		●	-55 to 125

### Radial lead type (A type)

Series	Page	Part No.	Features	Small size	Large capacitance	High ripple	High temperature	Long life	Category temperature range (°C)
ZF	143 to 144	EEHAZF---	150 °C 1,000 h				●	●	-55 to 150

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

Products list

ZA

ZC

ZK

ZKU

ZE

ZS

ZF

Surface  
mount  
type

Radial  
lead type

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
**Line-up**  
Series system diagram  
**Products list**

Surface mount type

Radial lead type

Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Size code	Size (mm)		Page	Series
				φD	L		
25 to 50	80 to 120	10 to 33	C	5.0	5.8	131 to 132	ZA
25 to 63	50 to 120	10 to 56	D	6.3	5.8		
	30 to 80	22 to 100	D8	6.3	7.7		
25 to 80	27 to 45	22 to 220	F	8.0	10.2		
	30 to 36	33 to 330	G	10.0	10.2		
25 to 50	80 to 120	10 to 33	C	5.0	5.8	133 to 134	ZC
25 to 63	50 to 120	10 to 56	D	6.3	5.8		
	30 to 80	22 to 100	D8	6.3	7.7		
25 to 80	27 to 45	22 to 220	F	8.0	10.2		
	20 to 36	33 to 30	G	10.0	10.2		
25 to 35	80 to 100	33 to 47	C	5.0	5.8	135 to 136	ZK
	50 to 60	56 to 82	D	6.3	5.8		
	30 to 35	100 to 150	D8	6.3	7.7		
	27	180 to 270	F	8.0	10.2		
	20	330 to 470	G	10.0	10.2		
25 to 35	80 to 100	39 to 56	C	5.0	5.8	137 to 138	ZKU
	50 to 60	68 to 100	D	6.3	5.8		
	30 to 35	120 to 180	D8	6.3	7.7		
	27	220 to 330	F	8.0	10.2		
	20	390 to 560	G	10.0	10.2		
25 to 63	27 to 40	33 to 220	F	8.0	10.2	139 to 140	ZE
	20 to 30	56 to 330	G	10.0	10.2		
25 to 63	11 to 15	150 to 560	G16	10.0	16.5	141 to 142	ZS

Rated voltage (V)	ESR (mΩ)	Capacitance (μF)	Size code	Size (mm)		Page	Series
				φD	L		
25 to 63	27 to 40	33 to 150	F	8.0	9.5	143 to 144	ZF
	20 to 30	56 to 270	G	10.0	9.5		

# Series system diagram

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models


EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

### Surface mount type (V type)

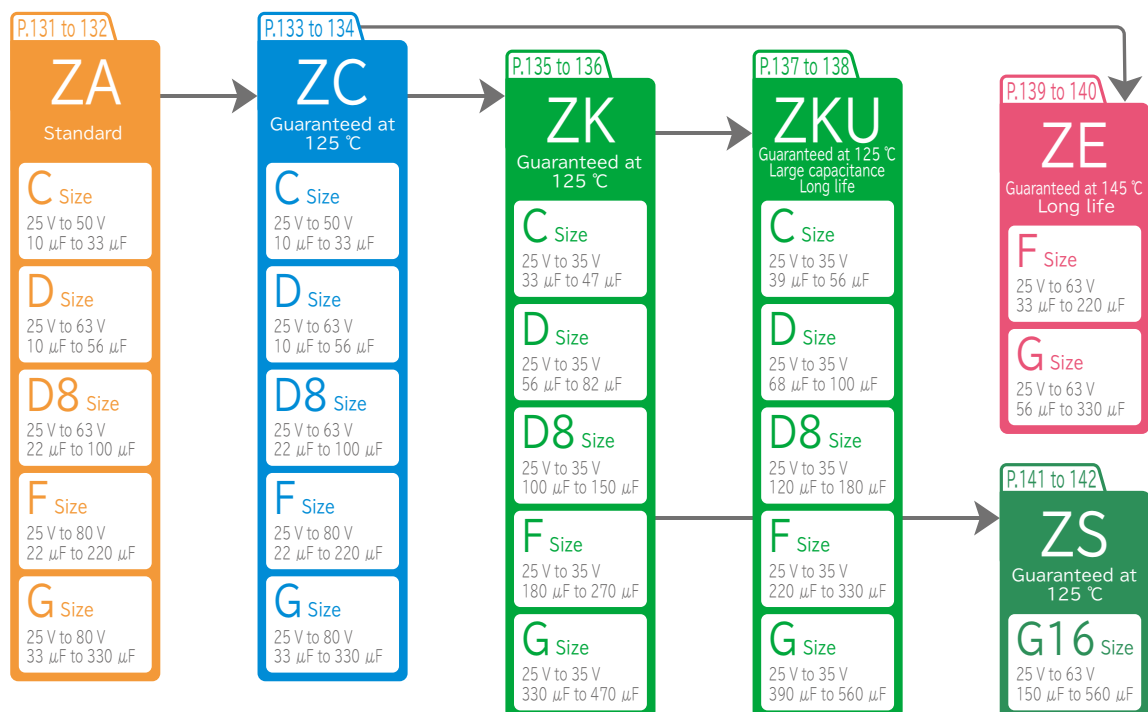

### Radial lead type (A type)



## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram

Products list

ZA

ZC

ZK

ZKU

ZE

ZS

ZF

Surface mount type

Radial lead type



# Products list

## Size · ESR Matrix list

Size code (ESR mΩ)

V	Series	μF																		
		10	22	27	33	39	47	56	68	82	100	120	150	180	220	270	330	390	470	560
25	ZA		C (80)		C (80)		D (50)	D (50)	D8 (30)		D8 (30)		F (27)		F (27)		G (20)			
	ZC		C (80)		C (80)		D (50)	D (50)	D8 (30)		D8 (30)		F (27)		F (27)		G (20)			
	ZK						C (80)		D (50)	D (50)			D8 (30)			F (27)			G (20)	
	ZKU							C (80)			D (50)			D8 (30)			F (27)			G (20)
	ZE														F (27)		G (20)			
	ZF													F (27)			G (20)			
	ZS																			G16 (11)
35	ZA	C (100)	C (100)	D (60)	D (60)		D (60)		D8 (35)		F (27)		F (27)		G (20)	G (20)				
	ZC	C (100)	C (100)		D (60)		D (60)		D8 (35)		F (27)		F (27)		G (20)	G (20)				
	ZK				C (100)			D (60)		D8 (35)			F (27)			G (20)				
	ZKU					C (100)			D (60)			D8 (35)			F (27)			G (20)		
	ZE												F (27)			G (20)				
	ZF										F (30)			G (23)						
	ZS																			G16 (11)
50	ZA	C (120)	D (80)		D8 (40)		F (30)		F (30)		G (28)									
	ZC	C (120)	D (80)		D8 (40)		F (30)		F (30)		G (28)	G (28)								
	ZE								F (30)		G (28)									
	ZF								F (35)		G (28)									
	ZS															G16 (13)				
63	ZA	D (120)	D8 (80)		F (40)		F (40)	G (30)	G (30)	G (30)										
	ZC	D (120)	D8 (80)		F (40)		F (40)	G (30)	G (30)	G (30)										
	ZE				F (40)			G (30)		G (30)										
	ZF				F (40)			G (30)												
	ZS												G16 (15)							
80	ZA		F (45)		G (36)															
	ZC		F (45)		G (36)		G (36)													

### Size code

(unit : mm)

C	φ 5 × L5.8	F	φ 8 × L10.2
D	φ 6.3 × L5.8	G	φ 10 × L10.2
D8	φ 6.3 × L7.7	G16	φ 10 × L16.5

(unit : mm)

F	φ 8 × L9.5
G	φ 10 × L9.5

(V type) (A type)

## SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

Surface mount type  
ZA  
ZC  
ZK  
ZKU  
ZE  
ZS  
ZF

Radial lead type



Endurance: 10000 h at 105 °C

High voltage (80 V max.)

AEC-Q200 compliant

Characteristics dependencies in low temperature and frequency are as small as polymer type.

Low ESR and High ripple current(70 %, Lower ESR than current V-FP)

Vibration-proof products are available upon request.( $\phi$ 6.3 mm and larger)

RoHS compliant

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide


Items	Specifications				
	C	D	D8	F	G
Size code	C	D	D8	F	G
Category temperature range	-55 °C to +105 °C				
Rated voltage range	25 V to 50 V	25 V to 63 V		25 V to 80 V	
Nominal capacitance range	10 $\mu$ F to 33 $\mu$ F	10 $\mu$ F to 56 $\mu$ F	22 $\mu$ F to 100 $\mu$ F	22 $\mu$ F to 220 $\mu$ F	33 $\mu$ F to 330 $\mu$ F
Capacitance tolerance	$\pm$ 20 % (120 Hz/+20 °C)				
Leakage current	$I \leq 0.01 CV$ or 3 ( $\mu$ A) After 2 minutes (Whichever is greater)				
Dissipation factor(tan $\delta$ )	Please see the attached characteristics list				
Surge voltage(V)	Rated voltage $\times$ 1.25 (15 °C to 35 °C)				
Endurance	+105 °C, 10000 h, apply the rated ripple current without exceeding the rated voltage				
	Capacitance change	Within $\pm$ 30 % of the initial value			
	tan $\delta$	$\leq$ 200 % of the initial limit			
	E.S.R.	$\leq$ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
	ESR after endurance ( $\Omega$ /100 kHz) (-40 °C)	Size Code			
	C	D	D8	F	G
	2.0	1.4	0.8	0.4	0.3
Shelf life	After storage for 1000 hours at +105 °C $\pm$ 2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in endurance. (With voltage treatment)				
Damp heat (Load)	+85 °C, 85 % to 90 %, 2000 h, rated voltage applied				
	Capacitance change	Within $\pm$ 30 % of the initial value			
	tan $\delta$	$\leq$ 200 % of the initial limit			
	E.S.R.	$\leq$ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.				
	Capacitance change	Within $\pm$ 10 % of the initial value			
	tan $\delta$	Within the initial limit			
	DC leakage current	Within the initial limit			

## ● Marking and dimensions

Surface mount type

Radial lead type

Catalog EOL models

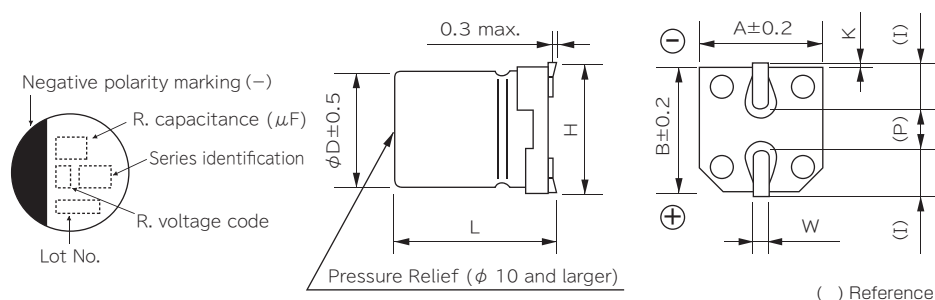

( ) Reference

(Unit : mm)

R. voltage (V)	25	35	50	63	80
Code	E	V	H	J	K

Size code	$\phi$ D	L	A,B	H	I	W	P	K
C	5.0	5.8 $\pm$ 0.3	5.3	6.5 max.	2.2	0.65 $\pm$ 0.1	1.5	0.35 $^{+0.15}_{-0.20}$
D	6.3	5.8 $\pm$ 0.3	6.6	7.8 max.	2.6	0.65 $\pm$ 0.1	1.8	0.35 $^{+0.15}_{-0.20}$
D8	6.3	7.7 $\pm$ 0.3	6.6	7.8 max.	2.6	0.65 $\pm$ 0.1	1.8	0.35 $^{+0.15}_{-0.20}$
F	8.0	10.2 $\pm$ 0.3	8.3	10.0 max.	3.4	0.90 $\pm$ 0.2	3.1	0.70 $\pm$ 0.2
G	10.0	10.2 $\pm$ 0.3	10.3	12.0 max.	3.5	0.90 $\pm$ 0.2	4.6	0.70 $\pm$ 0.2

※The dimensions of the vibration-proof products, please refer to the page of the mounting specification

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

ZA	Surface mount type
ZC	
ZK	
ZKU	
ZE	
ZS	
ZF	Radial lead type

● Characteristics list

Series	Rated voltage (V)	Capacitance (±20%) (μF)	Case size (mm)			Size code	Specifications			Part number			Min. Packaging Qty (pcs)
			φD	L			Ripple Current ※1 (mA rms)	ESR ※2 (mΩ)	tan δ ※3	Standard product	Vibration-proof product	Taping	
				Standard product	Vibration-proof product								
ZA	25	22	5.0	5.8	—	C	900	80	0.14	EEHZA1E220R	—	1000	
		33	5.0	5.8	—	C	900	80	0.14	EEHZA1E330R	—	1000	
		47	6.3	5.8	6.1	D	1300	50	0.14	EEHZA1E470P	EEHZA1E470V	1000	
		56	6.3	5.8	6.1	D	1300	50	0.14	EEHZA1E560P	EEHZA1E560V	1000	
		68	6.3	7.7	8.0	D8	2000	30	0.14	EEHZA1E680XP	EEHZA1E680XV	900	
		100	6.3	7.7	8.0	D8	2000	30	0.14	EEHZA1E101XP	EEHZA1E101XV	900	
		150	8.0	10.2	10.5	F	2300	27	0.14	EEHZA1E151P	EEHZA1E151V	500	
		220	8.0	10.2	10.5	F	2300	27	0.14	EEHZA1E221P	EEHZA1E221V	500	
	330	10.0	10.2	10.5	G	2500	20	0.14	EEHZA1E331P	EEHZA1E331V	500		
	35	10	5.0	5.8	—	C	900	100	0.12	EEHZA1V100R	—	1000	
		22	5.0	5.8	—	C	900	100	0.12	EEHZA1V220R	—	1000	
		27	6.3	5.8	6.1	D	1300	60	0.12	EEHZA1V270P	EEHZA1V270V	1000	
		33	6.3	5.8	6.1	D	1300	60	0.12	EEHZA1V330P	EEHZA1V330V	1000	
		47	6.3	5.8	6.1	D	1300	60	0.12	EEHZA1V470P	EEHZA1V470V	1000	
		68	6.3	7.7	8.0	D8	2000	35	0.12	EEHZA1V680XP	EEHZA1V680XV	900	
		100	8.0	10.2	10.5	F	2300	27	0.12	EEHZA1V101P	EEHZA1V101V	500	
		150	8.0	10.2	10.5	F	2300	27	0.12	EEHZA1V151P	EEHZA1V151V	500	
	50	220	10.0	10.2	10.5	G	2500	20	0.12	EEHZA1V221P	EEHZA1V221V	500	
		270	10.0	10.2	10.5	G	2500	20	0.12	EEHZA1V271P	EEHZA1V271V	500	
		10	5.0	5.8	—	C	750	120	0.10	EEHZA1H100R	—	1000	
		22	6.3	5.8	6.1	D	1100	80	0.10	EEHZA1H220P	EEHZA1H220V	1000	
		33	6.3	7.7	8.0	D8	1600	40	0.10	EEHZA1H330XP	EEHZA1H330XV	900	
	63	47	8.0	10.2	10.5	F	1800	30	0.10	EEHZA1H470P	EEHZA1H470V	500	
		68	8.0	10.2	10.5	F	1800	30	0.10	EEHZA1H680P	EEHZA1H680V	500	
		100	10.0	10.2	10.5	G	2000	28	0.10	EEHZA1H101P	EEHZA1H101V	500	
		10	6.3	5.8	6.1	D	1000	120	0.08	EEHZA1J100P	EEHZA1J100V	1000	
		22	6.3	7.7	8.0	D8	1500	80	0.08	EEHZA1J220XP	EEHZA1J220XV	900	
	80	33	8.0	10.2	10.5	F	1700	40	0.08	EEHZA1J330P	EEHZA1J330V	500	
		47	8.0	10.2	10.5	F	1700	40	0.08	EEHZA1J470P	EEHZA1J470V	500	
		56	10.0	10.2	10.5	G	1800	30	0.08	EEHZA1J560P	EEHZA1J560V	500	
		68	10.0	10.2	10.5	G	1800	30	0.08	EEHZA1J680P	EEHZA1J680V	500	
		82	10.0	10.2	10.5	G	1800	30	0.08	EEHZA1J820P	EEHZA1J820V	500	
	80	22	8.0	10.2	10.5	F	1550	45	0.08	EEHZA1K220P	EEHZA1K220V	500	
33		10.0	10.2	10.5	G	1700	36	0.08	EEHZA1K330P	EEHZA1K330V	500		

※1: Ripple current (100 kHz/ +105 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/ +20 °C)  
 ◆Please refer to the P125 to 126 in this catalog for "Reflow conditions" and "Taping specifications".

● Frequency correction factor for ripple current

Rated capacitance (μF)	Frequency	100 Hz ≤ f < 200 Hz	200 Hz ≤ f < 300 Hz	300 Hz ≤ f < 500 Hz	500 Hz ≤ f < 1 kHz
C < 47 μF	Correction factor	0.10	0.10	0.15	0.20
47 μF ≤ C < 150 μF		0.15	0.20	0.25	0.30
150 μF ≤ C		0.15	0.25	0.25	0.30

Rated capacitance (μF)	Frequency	1 kHz ≤ f < 2 kHz	2 kHz ≤ f < 3 kHz	3 kHz ≤ f < 5 kHz	5 kHz ≤ f < 10 kHz
C < 47 μF	Correction factor	0.30	0.40	0.45	0.50
47 μF ≤ C < 150 μF		0.40	0.45	0.55	0.60
150 μF ≤ C		0.45	0.50	0.60	0.65

Rated capacitance (μF)	Frequency	10 kHz ≤ f < 15 kHz	15 kHz ≤ f < 20 kHz	20 kHz ≤ f < 30 kHz	30 kHz ≤ f < 40 kHz
C < 47 μF	Correction factor	0.60	0.65	0.70	0.75
47 μF ≤ C < 150 μF		0.70	0.75	0.80	0.80
150 μF ≤ C		0.75	0.80	0.85	0.85

Rated capacitance (μF)	Frequency	40 kHz ≤ f < 50 kHz	50 kHz ≤ f < 100 kHz	100 kHz ≤ f < 500 kHz	500 kHz ≤ f
C < 47 μF	Correction factor	0.80	0.85	1.00	1.05
47 μF ≤ C < 150 μF		0.85	0.90	1.00	1.00
150 μF ≤ C		0.85	0.90	1.00	1.00

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

**SP-Cap**

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Catalog EOL models

**POSCAP**

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
 EOL Models

**OS-CON**

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

**Hybrid**

Guidelines and Precautions  
 Mounting specifications  
 Packing specifications

Selection guide  
 Line-up  
 Series system diagram  
 Products list

Surface mount type	<b>ZA</b>
	ZC
	ZK
	ZKU
	ZE
	ZS
Radial lead type	ZF



Endurance: 4000 h at 125 °C High-withstand voltage (80 V max.), Low LC (0.01 CV or 3 μA)

Low ESR and High ripple current(70 %, Lower ESR than current V-FP) Vibration-proof products are available upon request.(φ6.3 mm and larger)

Characteristics dependencies in low temperature and frequency are as small as polymer type. AEC-Q200 compliant RoHS compliant

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON


Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications				
	C	D	D8	F	G
Size code	C	D	D8	F	G
Category temperature range	-55 °C to +125 °C				
Rated voltage range	25 V to 50 V	25 V to 63 V		25 V to 80 V	
Nominal capacitance range	10 μF to 33 μF	10 μF to 56 μF	22 μF to 100 μF	22 μF to 220 μF	33 μF to 330 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	I ≤ 0.01 CV or 3 (μA) After 2 minutes (Whichever is greater)				
Dissipation factor(tan δ)	Please see the attached characteristics list				
Surge voltage (V)	Rated voltage × 1.25 (15 °C to 35 °C)				
Endurance 1	125 °C, 4000 h, apply the rated ripple current without exceeding the rated voltage				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	E.S.R.	≤ 200 % of the initial limit			
Endurance 2	+125 °C, 3000 h, apply the rated ripple current without exceeding the rated voltage				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	E.S.R.	≤ 300 % of the initial limit			
Shelf life	After storage for 1000 hours at +125 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in endurance. (With voltage treatment)				
	+85 °C, 85 % to 90 %, 2000 h, rated voltage applied				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
Damp heat (Load)	+85 °C, 85 % to 90 %, 2000 h, rated voltage applied				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	E.S.R.	≤ 200 % of the initial limit			
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.				
	Capacitance change	Within ±10 % of the initial value			
	tan δ	Within the initial limit			
	DC leakage current	Within the initial limit			

## ● Marking and dimensions

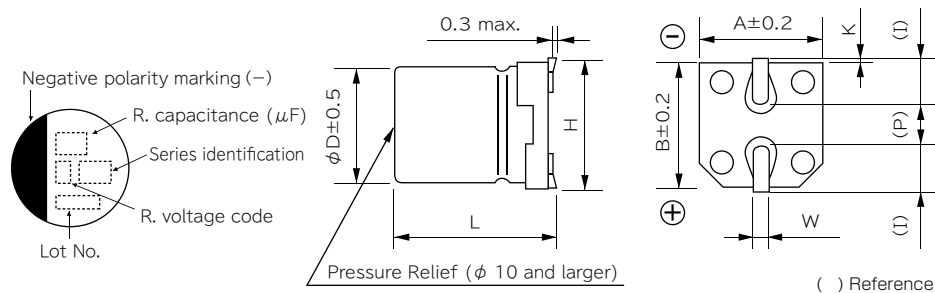

(Unit : mm)

R. voltage (V)	25	35	50	63	80
Code	E	V	H	J	K

Size code	φD	L	A,B	H	I	W	P	K
C	5.0	5.8±0.3	5.3	6.5 max.	2.2	0.65±0.1	1.5	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D	6.3	5.8±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D8	6.3	7.7±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
F	8.0	10.2±0.3	8.3	10.0 max.	3.4	0.90±0.2	3.1	0.70±0.2
G	10.0	10.2±0.3	10.3	12.0 max.	3.5	0.90±0.2	4.6	0.70±0.2

※The dimensions of the vibration-proof products, please refer to the page of the mounting specification

**Hybrid**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

**Line-up**

Series system diagram  
Products list

ZA  
**ZC**  
ZK  
ZKU  
ZE  
ZS  
ZF

Surface mount type  
Radial lead type

● Characteristics list

Endurance 1: 125 °C 4000 hours  
Endurance 2: 125 °C 3000 hours

Series	Rated voltage (V)	Capacitance (±20%) (μF)	Case size (mm)				Size code	Specifications				Part number			Min. Packaging Qty (pcs)
			φD	L		Ripple Current ※1 (mA rms)		ESR ※2 (mΩ)	tan δ ※3	Standard product	Vibration-proof product	Taping			
				Standard product	Vibration-proof product								Endurance 1	Endurance 2	
ZC	25	22	5.0	5.8	—	C	550	—	80	0.14	EEH2C1E220R	—	1000		
		33	5.0	5.8	—	C	550	—	80	0.14	EEH2C1E330R	—	1000		
		47	6.3	5.8	6.1	D	900	—	50	0.14	EEH2C1E470P	EEH2C1E470V	1000		
		56	6.3	5.8	6.1	D	900	—	50	0.14	EEH2C1E560P	EEH2C1E560V	1000		
		68	6.3	7.7	8.0	D8	1400	—	30	0.14	EEH2C1E680XP	EEH2C1E680XV	900		
		100	6.3	7.7	8.0	D8	1400	—	30	0.14	EEH2C1E101XP	EEH2C1E101XV	900		
		150	8.0	10.2	10.5	F	1600	1900	27	0.14	EEH2C1E151P	EEH2C1E151V	500		
		220	8.0	10.2	10.5	F	1600	1900	27	0.14	EEH2C1E221P	EEH2C1E221V	500		
	350	10.0	10.2	10.5	G	2000	2900	20	0.14	EEH2C1E331P	EEH2C1E331V	500			
	35	10	5.0	5.8	—	C	550	—	100	0.12	EEH2C1V100R	—	1000		
		22	5.0	5.8	—	C	550	—	100	0.12	EEH2C1V220R	—	1000		
		33	6.3	5.8	6.1	D	900	—	60	0.12	EEH2C1V330P	EEH2C1V330V	1000		
		47	6.3	5.8	6.1	D	900	—	60	0.12	EEH2C1V470P	EEH2C1V470V	1000		
		68	6.3	7.7	8.0	D8	1400	—	35	0.12	EEH2C1V680XP	EEH2C1V680XV	900		
		100	8.0	10.2	10.5	F	1600	1900	27	0.12	EEH2C1V101P	EEH2C1V101V	500		
		150	8.0	10.2	10.5	F	1600	1900	27	0.12	EEH2C1V151P	EEH2C1V151V	500		
		220	10.0	10.2	10.5	G	2000	2800	20	0.12	EEH2C1V221P	EEH2C1V221V	500		
	270	10.0	10.2	10.5	G	2000	2800	20	0.12	EEH2C1V271P	EEH2C1V271V	500			
	50	10	5.0	5.8	—	C	500	—	120	0.10	EEH2C1H100R	—	1000		
		22	6.3	5.8	6.1	D	750	—	80	0.10	EEH2C1H220P	EEH2C1H220V	1000		
		33	6.3	7.7	8.0	D8	1100	—	40	0.10	EEH2C1H330XP	EEH2C1H330XV	900		
		47	8.0	10.2	10.5	F	1250	—	30	0.10	EEH2C1H470P	EEH2C1H470V	500		
		68	8.0	10.2	10.5	F	1250	—	30	0.10	EEH2C1H680P	EEH2C1H680V	500		
		100	10.0	10.2	10.5	G	1600	—	28	0.10	EEH2C1H101P	EEH2C1H101V	500		
		120	10.0	10.2	10.5	G	1600	—	28	0.10	EEH2C1H121P	EEH2C1H121V	500		
	63	10	6.3	5.8	6.1	D	700	—	120	0.08	EEH2C1J100P	EEH2C1J100V	1000		
		22	6.3	7.7	8.0	D8	900	—	80	0.08	EEH2C1J220XP	EEH2C1J220XV	900		
		33	8.0	10.2	10.5	F	1100	—	40	0.08	EEH2C1J330P	EEH2C1J330V	500		
		47	8.0	10.2	10.5	F	1100	—	40	0.08	EEH2C1J470P	EEH2C1J470V	500		
		56	10.0	10.2	10.5	G	1400	—	30	0.08	EEH2C1J560P	EEH2C1J560V	500		
		68	10.0	10.2	10.5	G	1400	—	30	0.08	EEH2C1J680P	EEH2C1J680V	500		
	80	82	10.0	10.2	10.5	G	1400	—	30	0.08	EEH2C1J820P	EEH2C1J820V	500		
		22	8.0	10.2	10.5	F	1050	—	45	0.08	EEH2C1K220P	EEH2C1K220V	500		
		33	10.0	10.2	10.5	G	1360	—	36	0.08	EEH2C1K330P	EEH2C1K330V	500		
		47	10.0	10.2	10.5	G	1360	—	36	0.08	EEH2C1K470P	EEH2C1K470V	500		

※1: Ripple current (100 kHz/ +125 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/ +20 °C)  
◆Please refer to the P125 to 126 in this catalog for "Reflow conditions" and "Taping specifications".

● Frequency correction factor for ripple current

Rated capacitance (μF)	Frequency	100 Hz ≤ f < 200 Hz	200 Hz ≤ f < 300 Hz	300 Hz ≤ f < 500 Hz	500 Hz ≤ f < 1 kHz
C < 47 μF	Correction factor	0.10	0.10	0.15	0.20
47 μF ≤ C < 150 μF		0.15	0.20	0.25	0.30
150 μF ≤ C		0.15	0.25	0.25	0.30

Rated capacitance (μF)	Frequency	1 kHz ≤ f < 2 kHz	2 kHz ≤ f < 3 kHz	3 kHz ≤ f < 5 kHz	5 kHz ≤ f < 10 kHz
C < 47 μF	Correction factor	0.30	0.40	0.45	0.50
47 μF ≤ C < 150 μF		0.40	0.45	0.55	0.60
150 μF ≤ C		0.45	0.50	0.60	0.65

Rated capacitance (μF)	Frequency	10 kHz ≤ f < 15 kHz	15 kHz ≤ f < 20 kHz	20 kHz ≤ f < 30 kHz	30 kHz ≤ f < 40 kHz
C < 47 μF	Correction factor	0.60	0.65	0.70	0.75
47 μF ≤ C < 150 μF		0.70	0.75	0.80	0.80
150 μF ≤ C		0.75	0.80	0.85	0.85

Rated capacitance (μF)	Frequency	40 kHz ≤ f < 50 kHz	50 kHz ≤ f < 100 kHz	100 kHz ≤ f < 500 kHz	500 kHz ≤ f
C < 47 μF	Correction factor	0.80	0.85	1.00	1.05
47 μF ≤ C < 150 μF		0.85	0.90	1.00	1.00
150 μF ≤ C		0.85	0.90	1.00	1.00

● After endurance ESR (100 kHz, -40 °C)

Size code	C	D	D8	F	G
ESR (Ω)	2.0	1.4	0.8	0.4	0.3

Design and Specifications are each subject to change without notice. Ask factory for the current technical Specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

**SP-Cap**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

**POSCAP**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

**OS-CON**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

**Hybrid**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

ZA
ZC
ZK
ZKU
ZE
ZS
ZF



High capacitance and High ripple current compared with ZC series Characteristics dependencies in low temperature and frequency are as small as polymer type.

Endurance : 4000 h at 125 °C (High temperature / Long life) CVibration-proof products are available upon request. (φ6.3 mm and larger)

Low ESR (85 %, Lower ESR than Current V-TP), Low LC (0.01 CV or 3 μA) AEC-Q200 compliant RoHS compliant

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON


Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications				
	C	D	D8	F	G
Size code	C	D	D8	F	G
Category temperature range	-55 °C to +125 °C				
Rated voltage range	25 V to 35 V				
Nominal capacitance range	33 μF to 47 μF	56 μF to 82 μF	100 μF to 150 μF	180 μF to 270 μF	330 μF to 470 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	I ≤ 0.01 CV or 3 (μA) After 2 minutes (whichever is greater)				
Dissipation factor (tan δ)	Please see the attached characteristics list				
Surge voltage (V)	Rated voltage × 1.25 (15 °C to 35 °C)				
Endurance	125 °C, 4000 h, apply the rated ripple current without exceeding the rated voltage				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	E.S.R.	≤ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
	ESR after endurance (Ω/100 kHz) (-40 °C)	Size Code			
	C	D	D8	F	G
	2.0	1.4	0.8	0.4	0.3
Shelf life	After storage for 1000 hours at +125 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in endurance. (With voltage treatment)				
Damp heat (Load)	85 °C, 85 % to 90 %, 2000 h, rated voltage applied				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	E.S.R.	≤ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.				
	Capacitance change	Within ±10 % of the initial value			
	tan δ	Within the initial limit			
	DC leakage current	Within the initial limit			

## ● Marking and dimensions

Surface mount type

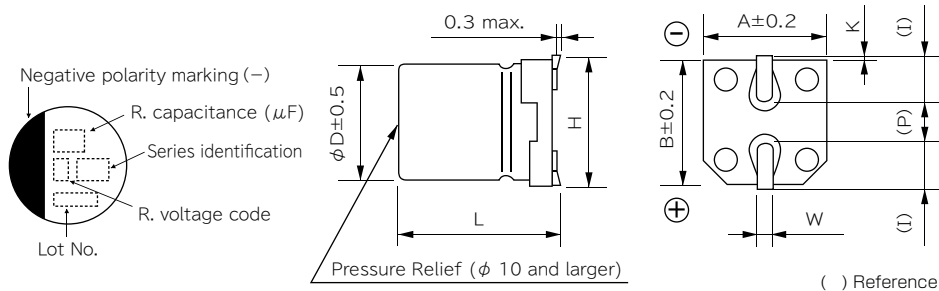

Radial lead type

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

- ZA
- ZC
- ZK** Surface mount type
- ZKU
- ZE
- ZS
- ZF Radial lead type

R. voltage (V)	25	35
Code	E	V

(Unit : mm)

Size code	φD	L	A,B	H	I	W	P	K
C	5.0	5.8±0.3	5.3	6.5 max.	2.2	0.65±0.1	1.5	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D	6.3	5.8±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D8	6.3	7.7±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
F	8.0	10.2±0.3	8.3	10.0 max.	3.4	0.90±0.2	3.1	0.70±0.2
G	10.0	10.2±0.3	10.3	12.0 max.	3.5	0.90±0.2	4.6	0.70±0.2

※The dimensions of the vibration-proof products, please refer to the page of the mounting specification

## ● Characteristics list

Series	Rated voltage (V)	Capacitance (±20%) (μF)	Case size (mm)			Size code	Specifications			Part number		Min. Packaging Qty (pcs)
			φD	L			Ripple Current ※1 (mA rms)	ESR ※2 (mΩ)	tan δ ※3	Standard product	Vibration-proof product	
				Standard product	Vibration-proof product							
ZK	25	47	5.0	5.8	—	C	850	80	0.14	EEHZK1E470R	—	1000
		68	6.3	5.8	6.1	D	1300	50	0.14	EEHZK1E680P	EEHZK1E680V	1000
		82	6.3	5.8	6.1	D	1300	50	0.14	EEHZK1E820P	EEHZK1E820V	1000
		150	6.3	7.7	8.0	D8	1800	30	0.14	EEHZK1E151XP	EEHZK1E151XV	900
		270	8.0	10.2	10.5	F	2000	27	0.14	EEHZK1E271P	EEHZK1E271V	500
		470	10.0	10.2	10.5	G	2800	20	0.14	EEHZK1E471P	EEHZK1E471V	500
	35	33	5.0	5.8	—	C	750	100	0.12	EEHZK1V330R	—	1000
		56	6.3	5.8	6.1	D	1200	60	0.12	EEHZK1V560P	EEHZK1V560V	1000
		100	6.3	7.7	8.0	D8	1700	35	0.12	EEHZK1V101XP	EEHZK1V101XV	900
		180	8.0	10.2	10.5	F	2000	27	0.12	EEHZK1V181P	EEHZK1V181V	500
		330	10.0	10.2	10.5	G	2800	20	0.12	EEHZK1V331P	EEHZK1V331V	500

※1:Ripple current (100 kHz/ +125 °C) ※2:ESR (100 kHz/+20 °C) ※3:tan δ (120 Hz/ +20 °C)

◆Please refer to the P125 to 126 in this catalog for "Reflow conditions" and "Taping specifications".

## ● Frequency correction factor for ripple current

Rated capacitance(μF)	Frequency	100 Hz ≤ f < 200 Hz	200 Hz ≤ f < 300 Hz	300 Hz ≤ f < 500 Hz	500 Hz ≤ f < 1 kHz
C < 47 μF	Correction factor	0.15	0.20	0.25	0.35
47 μF ≤ C < 100 μF		0.15	0.25	0.30	0.40
100 μF ≤ C		0.15	0.25	0.30	0.40

Rated capacitance(μF)	Frequency	1 kHz ≤ f < 2 kHz	2 kHz ≤ f < 3 kHz	3 kHz ≤ f < 5 kHz	5 kHz ≤ f < 10 kHz
C < 7 μF	Correction factor	0.45	0.55	0.60	0.65
47 μF ≤ C < 100 μF		0.50	0.60	0.65	0.70
100 μF ≤ C		0.50	0.60	0.65	0.70

Rated capacitance(μF)	Frequency	10 kHz ≤ f < 15 kHz	15 kHz ≤ f < 20 kHz	20 kHz ≤ f < 30 kHz	30 kHz ≤ f < 40 kHz
C < 47 μF	Correction factor	0.70	0.75	0.75	0.75
47 μF ≤ C < 100 μF		0.75	0.75	0.80	0.80
100 μF ≤ C		0.75	0.80	0.85	0.85

Rated capacitance(μF)	Frequency	40 kHz ≤ f < 50 kHz	50 kHz ≤ f < 100 kHz	100 kHz ≤ f < 500 kHz	500 kHz ≤ f
C < 47 μF	Correction factor	0.80	0.85	1.00	1.05
47 μF ≤ C < 100 μF		0.85	0.90	1.00	1.00
100 μF ≤ C		0.85	0.90	1.00	1.00

Design and Specifications are each subject to change without notice. Ask factory for the current technical Specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

Surface mount type	ZA
	ZC
	<b>ZK</b>
	ZKU
	ZE
	ZS
Radial lead type	ZF





Endurance : 4000 h at 125 °C(High temperature / Long life)

Large capacitance compared with ZK series

Low ESR(85 %, Lower ESR than Current V-TP), Low LC(0.01 CV or 3 μA)

Vibration-proof products are available upon request.(φ6.3 mm and larger)

Characteristics dependencies in low temperature and frequency are as small as polymer type.

AEC-Q200 compliant

RoHS compliant

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

Items	Specifications				
Size code	C	D	D8	F	G
Category temperature range	-55 °C to +125 °C				
Rated voltage range	25 V to 35 V				
Nominal capacitance range	39 μF to 56 μF	68 μF to 100 μF	120 μF to 180 μF	220 μF to 330 μF	390 μF to 560 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)				
Leakage current	I ≤ 0.01 CV or 3 (μA) After 2 minutes (whichever is greater)				
Dissipation factor(tan δ)	Please see the attached characteristics list				
Surge voltage(V)	Rated voltage × 1.25 (15 °C to 35 °C)				
Endurance	+125 °C±2 °C, 4000 h, apply the rated ripple current without exceeding the rated voltage.				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	E.S.R.	≤ 200 % of the initial limit			
	DC leakage current	Within the initial limit			
ESR after endurance (Ω/100 kHz) (-40 °C)	Size Code				
	C	D	D8	F	G
	2.0	1.4	0.8	0.4	0.3
Shelf life	After storage for 1000 hours at +125 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in endurance. (With voltage treatment)				
Damp heat (Load)	85 °C, 85 % to 90 %, 2000 h, rated voltage applied				
	Capacitance change	Within ±30 % of the initial value			
	tan δ	≤ 200 % of the initial limit			
	E.S.R.	≤ 200 % of the initial limit			
DC leakage current	Within the initial limit				


## OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

## ● Marking and dimensions

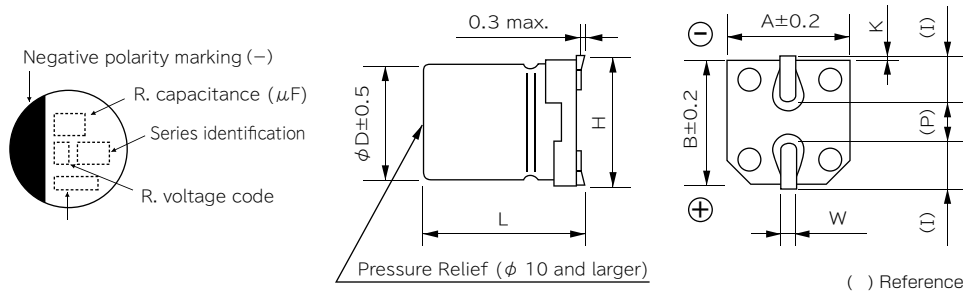

(Unit : mm)

R. voltage (V)	25	35
Code	E	V

Size code	φD	L	A,B	H	I	W	P	K
C	5.0	5.8±0.3	5.3	6.5 max.	2.2	0.65±0.1	1.5	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D	6.3	5.8±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D8	6.3	7.7±0.3	6.6	7.8 max.	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
F	8.0	10.2±0.3	8.3	10.0 max.	3.4	0.90±0.2	3.1	0.70±0.2
G	10.0	10.2±0.3	10.3	12.0 max.	3.5	0.90±0.2	4.6	0.70±0.2

\*The dimensions of the vibration-proof products, please refer to the page of the mounting specification

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up

Series system diagram

Products list

ZA	Surface mount type
ZC	
ZK	
<b>ZKU</b>	
ZE	
ZS	Radial lead type
ZF	

## ● Characteristics list

Series	Rated voltage (V)	Capacitance (±20%) (μF)	Case size (mm)			Size code	Specifications			Part number		Min. Packaging Q'ty (pcs)
			φD	L			Ripple Current ※1 (mA rms)	ESR ※2 (mΩ)	tan δ ※3	Standard product	Vibration-proof product	
ZKU	25	56	5.0	5.8	—	C	850	80	0.14	EEHZK1E560UR	—	1000
		100	6.3	5.8	6.1	D	1300	50	0.14	EEHZK1E101UP	EEHZK1E101UV	1000
		180	6.3	7.7	8.0	D8	1800	30	0.14	EEHZKE181XUP	EEHZKE181XUV	900
		330	8.0	10.2	10.5	F	2000	27	0.14	EEHZK1E331UP	EEHZK1E331UV	500
		560	10.0	10.2	10.5	G	2800	20	0.14	EEHZK1E561UP	EEHZK1E561UV	500
	35	39	5.0	5.8	—	C	750	100	0.12	EEHZK1V390UR	—	1000
		68	6.3	5.8	6.1	D	1200	60	0.12	EEHZK1V680UP	EEHZK1V680UV	1000
		120	6.3	7.7	8.0	D8	1700	35	0.12	EEHZKV121XUP	EEHZKV121XUV	900
		220	8.0	10.2	10.5	F	2000	27	0.12	EEHZK1V221UP	EEHZK1V221UV	500
		390	10.0	10.2	10.2	G	2800	20	0.12	EEHZK1V391UP	EEHZK1V391UV	500

※1: Ripple current (100 kHz/ +125 °C) ※2: ESR (100 kHz/+20 °C) ※3: tan δ (120 Hz/ +20 °C)

◆Please refer to the P125 to 126 in this catalog for "Reflow conditions" and "Taping specifications".

## ● Frequency correction factor for ripple current

Rated capacitance (μF)	Frequency	100 Hz ≤ f < 200 Hz	200 Hz ≤ f < 300 Hz	300 Hz ≤ f < 500 Hz	500 Hz ≤ f < 1 kHz
C < 47 μF	Correction factor	0.15	0.20	0.25	0.35
47 μF ≤ C < 100 μF		0.15	0.25	0.30	0.40
100 μF ≤ C		0.15	0.25	0.30	0.40

Rated capacitance (μF)	Frequency	1 kHz ≤ f < 2 kHz	2 kHz ≤ f < 3 kHz	3 kHz ≤ f < 5 kHz	5 kHz ≤ f < 10 kHz
C < 47 μF	Correction factor	0.45	0.55	0.60	0.65
47 μF ≤ C < 100 μF		0.50	0.60	0.65	0.70
100 μF ≤ C		0.50	0.60	0.65	0.70

Rated capacitance (μF)	Frequency	10 kHz ≤ f < 15 kHz	15 kHz ≤ f < 20 kHz	20 kHz ≤ f < 30 kHz	30 kHz ≤ f < 40 kHz
C < 47 μF	Correction factor	0.70	0.75	0.75	0.75
47 μF ≤ C < 100 μF		0.75	0.75	0.80	0.80
100 μF ≤ C		0.75	0.80	0.85	0.85

Rated capacitance (μF)	Frequency	40 kHz ≤ f < 50 kHz	50 kHz ≤ f < 100 kHz	100 kHz ≤ f < 500 kHz	500 kHz ≤ f
C < 47 μF	Correction factor	0.80	0.85	1.00	1.05
47 μF ≤ C < 100 μF		0.85	0.90	1.00	1.00
100 μF ≤ C		0.85	0.90	1.00	1.00

Design and Specifications are each subject to change without notice. Ask factory for the current technical Specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

Surface mount type	ZA
	ZC
	ZK
	<b>ZKU</b>
	ZE
	ZS
Radial lead type	ZF



Endurance: 2000 h at 145 °C (High temperature / Long life)

Characteristics dependencies in low temperature and frequency are as small as polymer type.

Low ESR and High ripple current (85 %, Lower ESR than Current V-TP)

Vibration-proof products are available upon request.

High-withstand voltage (63V), Low LC (0.01 CV or 3μA)

AEC-Q200 compliant

RoHS compliant

**SP-Cap**

**Specifications**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

**POSCAP**

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

**OS-CON**




Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Items	Specifications	
Size code	F	G
Category temperature range	-55 °C to +145 °C	
Rated voltage range	25 V to 63 V	
Nominal capacitance range	33 μF to 220 μF	56 μF to 330 μF
Capacitance tolerance	±20 % (120 Hz/+20 °C)	
Leakage current	I ≤ 0.01 CV or 3 (μA) After 2 minutes (Whichever is greater)	
Dissipation factor(tan δ)	Please see the attached characteristics list	
Surge voltage(V)	Rated voltage × 1.25 (15 °C to 35 °C)	
Endurance 1	+145 °C±2 °C, 2000 h, apply the rated ripple current without exceeding the rated voltage.	
	Capacitance change	Within ±30% of the initial value
	tan δ	≤ 200 % of the initial limit
	E.S.R.	≤ 200 % of the initial limit
Endurance 2	+135 °C±2 °C, 4000 h, apply the rated ripple current without exceeding the rated voltage.	
	Capacitance change	Within ±30% of the initial value
	tan δ	≤ 200 % of the initial limit
	E.S.R.	≤ 200 % of the initial limit
Shelf life	After storage for 1000 hours at +145 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in endurance. (With voltage treatment)	
	+85 °C±2 °C, 85 % to 90 %, 2000 h, rated voltage applied.	
	Capacitance change	Within ±30% of the initial value
	tan δ	≤ 200 % of the initial limit
Damp heat (Load)	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.	
	Capacitance change	Within ±10% of the initial value
	tan δ	Within the initial limit
	DC leakage current	Within the initial limit
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.	
	Capacitance change	Within ±10% of the initial value
	tan δ	Within the initial limit
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.	
	Capacitance change	Within ±10% of the initial value
	tan δ	Within the initial limit
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.	
	Capacitance change	Within ±10% of the initial value
	tan δ	Within the initial limit

**Marking and dimensions**



( ) Reference

(Unit : mm)

R. voltage (V)	25	35	50	63
Code	E	V	H	J

Size code	φD	L	A,B	H	I	W	P	K
F	8.0	10.2±0.3	8.3	10.0 max.	3.4	0.90±0.2	3.1	0.70±0.2
G	10.0	10.2±0.3	10.3	12.0 max.	3.5	0.90±0.2	4.6	0.70±0.2

※The dimensions of the vibration-proof products, please refer to the page of the mounting specification

Guidelines and Precautions  
Mounting specifications  
Packing specifications

**Line-up**

Series system diagram  
Products list

- ZA
- ZC
- ZK
- ZKU
- ZE**
- ZS
- ZF

Surface mount type  
Radial lead type

## ● Characteristics list

Endurance 1: 145 °C 2000 hours  
Endurance 2: 135 °C 4000 hours

Series	Rated voltage (V)	Capacitance (±20%) (μF)	Case size (mm)			Size code	Specifications				Part number		Min. Packaging Q'ty (pcs)
			φD	L			Ripple Current ※1 (mA rms)		ESR ※2 (mΩ)	tan δ ※3	Standard product	Vibration-proof product	
				Standard product	Vibration-proof product		Endurance 1	Endurance 2					Taping
ZE	25	220	8.0	10.2	10.5	F	700	1600	27	0.14	EEHZE1E221P	EEHZE1E221V	500
		330	10.0	10.2	10.5	G	900	2000	20	0.14	EEHZE1E331P	EEHZE1E331V	500
	35	150	8.0	10.2	10.5	F	700	1600	27	0.12	EEHZE1V151P	EEHZE1V151V	500
		270	10.0	10.2	10.5	G	900	2000	20	0.12	EEHZE1V271P	EEHZE1V271V	500
	50	68	8.0	10.2	10.5	F	600	1250	30	0.10	EEHZE1H680P	EEHZE1H680V	500
		100	10.0	10.2	10.5	G	800	1600	28	0.10	EEHZE1H101P	EEHZE1H101V	500
	63	33	8.0	10.2	10.5	F	600	1100	40	0.08	EEHZE1J330P	EEHZE1J330V	500
		56	10.0	10.2	10.5	G	800	1400	30	0.08	EEHZE1J560P	EEHZE1J560V	500
82		10.0	10.2	10.5	G	800	1400	30	0.08	EEHZE1J820P	EEHZE1J820V	500	

- ※1: Ripple current (100 kHz/ +145 °C (Endurance 1) or +135°C (Endurance 2) )
- ※2: ESR (100 kHz/+20 °C)
- ※3: tan δ (120 Hz/ +20 °C)
- ◆Please refer to the P125 to 126 in this catalog for "Reflow conditions" and "Taping specifications"

## ● Frequency correction factor for ripple current

Rated capacitance (μF)	Frequency	100 Hz ≤ f < 200 Hz	200 Hz ≤ f < 300 Hz	300 Hz ≤ f < 500 Hz	500 Hz ≤ f < 1 kHz
C < 47 μF	Correction factor	0.10	0.10	0.15	0.20
47 μF ≤ C < 150 μF		0.15	0.20	0.25	0.30
150 μF ≤ C		0.15	0.25	0.25	0.30

Rated capacitance (μF)	Frequency	1 kHz ≤ f < 2 kHz	2 kHz ≤ f < 3 kHz	3 kHz ≤ f < 5 kHz	5 kHz ≤ f < 10 kHz
C < 47 μF	Correction factor	0.30	0.40	0.45	0.50
47 μF ≤ C < 150 μF		0.40	0.45	0.55	0.60
150 μF ≤ C		0.45	0.50	0.60	0.65

Rated capacitance (μF)	Frequency	10 kHz ≤ f < 15 kHz	15 kHz ≤ f < 20 kHz	20 kHz ≤ f < 30 kHz	30 kHz ≤ f < 40 kHz
C < 47 μF	Correction factor	0.60	0.65	0.70	0.75
47 μF ≤ C < 150 μF		0.70	0.75	0.80	0.80
150 μF ≤ C		0.75	0.80	0.85	0.85

Rated capacitance (μF)	Frequency	40 kHz ≤ f < 50 kHz	50 kHz ≤ f < 100 kHz	100 kHz ≤ f < 500 kHz	500 kHz ≤ f
C < 47 μF	Correction factor	0.80	0.85	1.00	1.05
47 μF ≤ C < 150 μF		0.85	0.90	1.00	1.00
150 μF ≤ C		0.85	0.90	1.00	1.00

## ● After endurance ESR (100 kHz, -40 °C)

Size code	F	G
ESR (Ω)	0.4	0.3

Design and Specifications are each subject to change without notice. Ask factory for the current technical Specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
Line-up  
Series system diagram  
Products list

Surface mount type	ZA
	ZC
	ZK
	ZKU
	<b>ZE</b>
	ZS
Radial lead type	ZF



High ripple current and Large capacitance compared with ZC series    Characteristics dependencies in low temperature and frequency are as small as polymer type.

Endurance: 4000 h at 125 °C    Vibration-proof products are available upon request.    AEC-Q200 compliant    RoHS compliant

## SP-Cap

## ● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

## POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

## OS-CON



Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Items	Specifications	
Size code	G16	
Category temperature range	-55 °C to +125 °C	
Rated voltage range	25 V to 63 V	
Nominal capacitance range	150 μF to 560 μF	
Capacitance tolerance	±20 % (120 Hz / +20 °C)	
DC leakage current	I ≤ 0.01 CV or 3 (μA) After 2 minutes (whichever is greater)	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Endurance	+125 °C±2 °C, 4000 h, apply the rated ripple current without exceeding the rated voltage.	
	Capacitance change	Within ±30% of the initial value
	Dissipation factor (tan δ)	≤ 200 % of the initial limit
	E.S.R.	≤ 200 % of the initial limit
	DC leakage current	Within the initial limit
	ESR after endurance (Ω / 100 kHz) (-40 °C)	Size code G16 0.3
Shelf life	After storage for 1000 hours at +125 °C±2 °C with no voltage applied and then being stabilized at +20°C, capacitors shall meet the limits specified in endurance. (With voltage treatment)	
Damp heat (Load)	+85 °C±2 °C, 85 % to 90 %, 2000 h, rated voltage applied.	
	Capacitance change	Within ±30% of the initial value
	Dissipation factor (tan δ)	≤ 200 % of the initial limit
	E.S.R.	≤ 200 % of the initial limit
	DC leakage current	Within the initial limit
Resistance to soldering heat	After reflow soldering and then being stabilized at +20°C, capacitors shall meet the following limits.	
	Capacitance change	Within ±10% of the initial value
	Dissipation factor (tan δ)	Within the initial limit
	DC leakage current	Within the initial limit

## ● Marking and Dimensions (not to scale)

Surface mount type

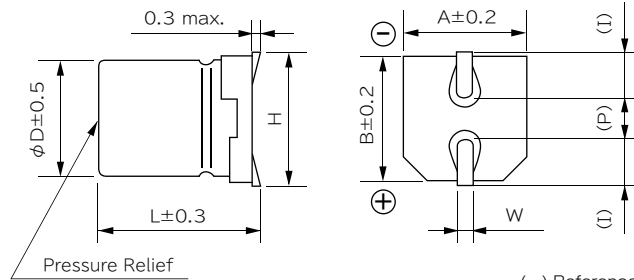

(Unit: mm)

R. voltage (V)	25	35	50	63
Code	E	V	H	J

Size code	φD	L	A,B	H	I	W	P
G16	10.0	16.5	10.3	11.0±0.2	3.2	1.2±0.2	4.6

※The dimensions of the vibration-proof products, please refer to the page of the mounting specification.

Catalog EOL models

## Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

### Line-up

Series system diagram    Selection guide

### Products list

- ZA
  - ZC
  - ZK
  - ZKU
  - ZE
  - ZS**
  - ZF
- Surface mount type
- Radial lead type

## ● Characteristics list

Endurance : 125 °C 4000 h

Series	Rated voltage (V)	Capacitance (±20 %) (μF)	Case size (mm)			Size code	Specifications			Part number		Min. Packaging Qty (pcs)
			φD	L			Ripple Current ※1 (mA rms)	ESR ※2 (mΩ)	tan δ ※3	Standard product	Vibration-proof product	
				Standard product	Vibration-proof product							
ZS	25	560	10.0	16.5	16.8	G16	4000	11	0.14	EEHZS1E561P	EEHZS1E561V	250
	35	470	10.0	16.5	16.8		4000	11	0.12	EEHZS1V471P	EEHZS1V471V	250
	50	220	10.0	16.5	16.8		3700	13	0.10	EEHZS1H221P	EEHZS1H221V	250
	63	150	10.0	16.5	16.8		3500	15	0.08	EEHZS1J151P	EEHZS1J151V	250

※1: Ripple current (100 kHz / +125 °C)

※2: ESR (100 kHz / +20 °C)

※3: tan δ (120 Hz / +20 °C)

◆Please refer to the P125 to 126 in this catalog for "Reflow conditions" and "Taping specifications"

◆The dimensions of the vibration-proof products, please refer to the page of the mounting specification.

## ● Frequency correction factor for ripple current

Rated capacitance (C)	Frequency (f)	100 Hz ≤ f < 200 Hz	200 Hz ≤ f < 300 Hz	300 Hz ≤ f < 500 Hz	500 Hz ≤ f < 1 kHz
100 μF ≤ C < 150 μF	Correction factor	0.15	0.20	0.25	0.30
150 μF ≤ C		0.15	0.25	0.25	0.30

Rated capacitance (C)	Frequency (f)	1 kHz ≤ f < 2 kHz	2 kHz ≤ f < 3 kHz	3 kHz ≤ f < 5 kHz	5 kHz ≤ f < 10 kHz
100 μF ≤ C < 150 μF	Correction factor	0.40	0.45	0.55	0.60
150 μF ≤ C		0.45	0.50	0.60	0.65

Rated capacitance (C)	Frequency (f)	10 kHz ≤ f < 15 kHz	15 kHz ≤ f < 20 kHz	20 kHz ≤ f < 30 kHz	30 kHz ≤ f < 40 kHz
100 μF ≤ C < 150 μF	Correction factor	0.70	0.75	0.80	0.80
150 μF ≤ C		0.75	0.80	0.85	0.85

Rated capacitance (C)	Frequency (f)	40 kHz ≤ f < 50 kHz	50 kHz ≤ f < 100 kHz	100 kHz ≤ f < 500 kHz	500 kHz ≤ f
100 μF ≤ C < 150 μF	Correction factor	0.85	0.90	1.00	1.00
150 μF ≤ C		0.85	0.90	1.00	1.00

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up  
Series system diagram  
Products list

Surface mount type	ZA
	ZC
	ZK
	ZKU
	ZE
	ZS
Radial lead type	ZF



Endurance : 1000 h at 150 °C (High temperature)

High-withstand voltage (63 V), Low LC (0.01 CV or 3 μA)

High temperature compared with ZC series

Characteristics dependencies in low temperature and frequency are as small as polymer type.

RoHS compliant

AEC-Q200 compliant

SP-Cap

● Specifications

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog Deletion models

EOL Models

OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Radial lead type

Catalog EOL models

Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Line-up



Series system diagram

Products list

ZA	Surface mount type
ZC	
ZK	
ZKU	
ZE	
ZS	
ZF	Radial lead type

Items	Specifications	
Size code	F	G
Category temperature range	-55 °C to +150 °C	
Rated voltage range	25 V to 63 V	
Nominal capacitance range	33 μF to 150 μF	56 μF to 270 μF
Capacitance tolerance	±20 % (120 Hz / +20°C)	
DC leakage current	I ≤ 0.01 CV or 3 (μA) After 2 minutes (whichever is greater)	
Dissipation factor (tan δ)	Please see the attached characteristics list	
Endurance	+150 °C ± 2 °C, 1000 h, apply the rated ripple current without exceeding the rated voltage.	
	Capacitance change	Within ±30% of the initial value
	Dissipation factor (tan δ)	≤ 200 % of the initial limit
	ESR	≤ 200 % of the initial limit
	DC leakage current	Within the initial limit
ESR after endurance (Ω / 100 kHz) (-40 °C)	Size code	
	F	G
	0.4	0.3
Shelf life	After storage for 1000 hours at +150 °C ± 2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in endurance. (With voltage treatment)	
Damp heat (Load)	+85 °C ± 2 °C, 85 % to 90 %, 2000 h, rated voltage applied	
	Capacitance change	Within ±30% of the initial value
	Dissipation factor (tan δ)	≤ 200 % of the initial limit
	ESR	≤ 200 % of the initial limit
DC leakage current	Within the initial limit	

● Marking and Dimensions (not to scale)

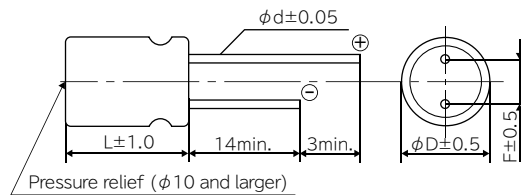

(Unit:mm)

R. voltage (V)	25	35	50	63
Code	E	V	H	J

Size code	φD	L	φd	F
F	8.0	9.5	0.6	3.5
G	10.0	9.5	0.6	5.0



## ● Characteristics list

Endurance : 150 °C 1000 h

Series	Rated voltage (V)	Capacitance (±20 %) (μF)	Case size (mm)		Size code	Specifications			Part number	Min. Packaging Q'ty (pcs)
			φD	L		Ripple Current ※1 (mA rms)	ESR ※2 (mΩ)	tan δ ※3		Long lead
ZF	25	150	8.0	9.5	F	800	27	0.14	EEHAZF1E151	200
		270	10.0	9.5	G	1000	20	0.14	EEHAZF1E271	200
	35	100	8.0	9.5	F	770	30	0.12	EEHAZF1V101	200
		150	10.0	9.5	G	950	23	0.12	EEHAZF1V151	200
	50	56	8.0	9.5	F	700	35	0.10	EEHAZF1H560	200
		100	10.0	9.5	G	900	28	0.10	EEHAZF1H101	200
	63	33	8.0	9.5	F	650	40	0.08	EEHAZF1J330	200
		56	10.0	9.5	G	840	30	0.08	EEHAZF1J560	200

※1: Ripple current (100 kHz / +150 °C)

※2: ESR (100 kHz / +20 °C)

※3: tan δ (120 Hz / +20 °C)

### SP-Cap

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Surface mount type

Catalog EOL models

### POSCAP

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

## ● Frequency correction factor for ripple current

Rated capacitance (C)	Frequency (f)	100 Hz ≤ f < 200Hz	200 Hz ≤ f < 300 Hz	300 Hz ≤ f < 500 Hz	500 Hz ≤ f < 1 kHz
C < 47 μF	Correction factor	0.10	0.10	0.15	0.20
47 μF ≤ C < 150 μF		0.15	0.20	0.25	0.30
150 μF ≤ C		0.15	0.25	0.25	0.30

Surface mount type

Rated capacitance (C)	Frequency (f)	1 kHz ≤ f < 2 kHz	2 kHz ≤ f < 3 kHz	3 kHz ≤ f < 5 kHz	5 kHz ≤ f < 10 kHz
C < 47 μF	Correction factor	0.30	0.40	0.45	0.50
47 μF ≤ C < 150 μF		0.40	0.45	0.55	0.60
150 μF ≤ C		0.45	0.50	0.60	0.65

Catalog Deletion models  
EOL Models

### OS-CON

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide

Rated capacitance (C)	Frequency (f)	10 kHz ≤ f < 15 kHz	15 kHz ≤ f < 20 kHz	20 kHz ≤ f < 30 kHz	30 kHz ≤ f < 40 kHz
C < 47 μF	Correction factor	0.60	0.65	0.70	0.75
47 μF ≤ C < 150 μF		0.70	0.75	0.80	0.80
150 μF ≤ C		0.75	0.80	0.85	0.85

Rated capacitance (C)	Frequency (f)	40 kHz ≤ f < 50 kHz	50 kHz ≤ f < 100 kHz	100 kHz ≤ f < 500 kHz	500 kHz ≤ f
C < 47 μF	Correction factor	0.80	0.85	1.00	1.05
47 μF ≤ C < 150 μF		0.85	0.90	1.00	1.00
150 μF ≤ C		0.85	0.90	1.00	1.00

Surface mount type

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Radial lead type

Catalog EOL models

### Hybrid

Guidelines and Precautions  
Mounting specifications  
Packing specifications

Selection guide  
**Line-up**  
Series system diagram  
**Products list**

Surface mount type  
ZA  
ZC  
ZK  
ZKU  
ZE  
ZS  
Radial lead type **ZF**

## Safety Precautions

When using our products, no matter what sort of equipment they might be used for, be sure to confirm the applications and environmental conditions with our specifications in advance.

Device Solutions Business Division  
Industrial Solutions Company

**Panasonic** INDUSTRY



Unauthorized duplication of this catalog is strictly forbidden.  
The contents of catalog are as of March 2020.