


# S N U B B E R C A P A C I T O R S

## KP-6 Axial Type

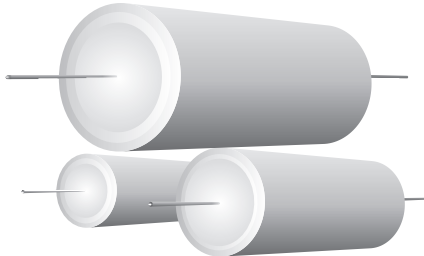

### Highlights







- Low inductance
- High DV/DT
- Low ESR
- Low loss polypropylene dielectric
- Impregnated elements eliminate corona

### Applications

These capacitors are used in high voltage and high current applications such as:

- Snubber networks
- Energy conversion and control in power electronics
- Noise suppressors in switching circuits

### Construction

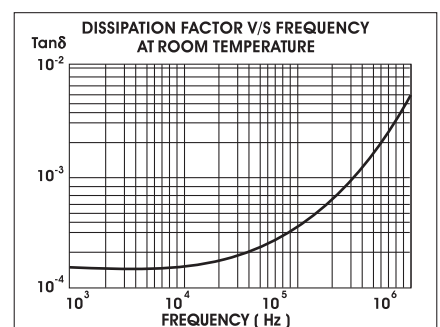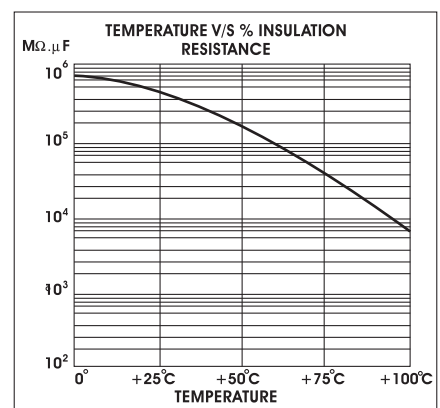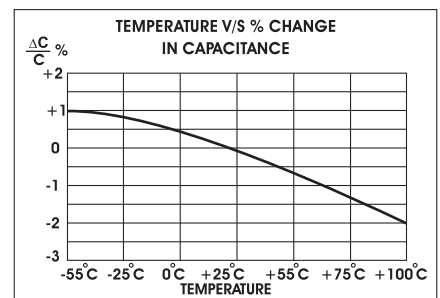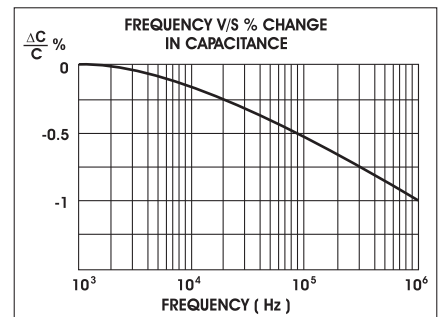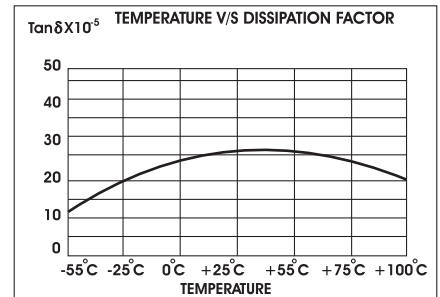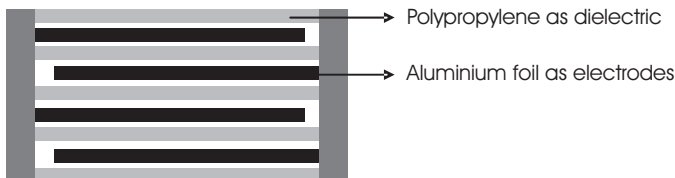

# S N U B B E R    C A P A C I T O R S

## KP-6 Axial Type

### Technical Specifications

#### Physical Characteristics

- |                        |  |
|------------------------|--|
| • Dielectric material  | Polypropylene film   |
| • Electrode material   | Aluminium foil   |
| • Winding construction | Non-inductive, extended foil, impregnated                          |
| • Terminals            | Tinned copper  |
| • Enclosure            | Preformed UL 94 V-0 plastic case with thermosetting resin end fill |


#### Electrical Characteristics

- |   |  |
|---|--|
| • Capacitance range   | 0.01MFD to 2.0MFD  |
| • Capacity tolerance  | ±5%(J), ±10%(K)  |
| • Rated voltage VDC   | 850, 1200, 2000, 2500, 3000  |
| • Rated voltage VAC   | 450, 500, 630, 700, 750  |
| • Test voltage between terminals  | Working voltage ≤ 2000VDC<br>2.5 x rated voltage VDC for 2 seconds<br>Working voltage > 2000VDC<br>2.0 x rated voltage VDC for 2 seconds |
| • Dissipation factor (Tanδ)   | ≤ 0.0005 at 1 KHz and 25°C   |
| • Temperature range   | -25°C to +85°C   |
| • Insulation resistance at 25°C at a test voltage of 500 VDC applied for 1 minute | C ≤ 0.33 MFD      C > 0.33 MFD<br>≥ 50,000 MΩ      ≥ 30,000 MΩ   |

---

### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially :

- The Company's symbol  followed by the words ALCON
- The capacitor grade viz KP-6
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors

# S N U B B E R   C A P A C I T O R S

## KP-6 Axial Type

### Standard Capacitor Values

#### Working voltage 850 VDC (450VAC)

Rated Capacitance MFD	Dimensions in mm*			DV/DT V/ $\mu$ Sec	I Peak Amps	I <sub>rms</sub> Max at 100KHz & 55°C Amps	ESR Max at 100KHz m $\Omega$
	D	L	d				
0.100	17.0	35.0	0.8	1100	110.00	6.00	12.00
0.150	17.0	35.0	0.8	1100	165.00	6.00	11.50
0.220	19.0	42.0	0.8	1000	220.00	7.00	10.20
0.330	19.0	42.0	1.0	1000	330.00	7.00	9.00
0.470	19.0	55.0	1.0	900	423.00	8.00	8.60
0.680	19.0	55.0	1.0	900	612.00	8.00	8.30
1.000	25.0	55.0	1.2	900	900.00	10.00	7.60
1.200	25.0	55.0	1.2	900	1080.00	11.00	7.20
1.500	25.0	55.0	1.2	900	1350.00	12.00	6.80
2.000	30.0	55.0	1.2	900	1800.00	12.00	5.60

#### Working voltage 1200 VDC (500VAC)

Rated Capacitance MFD	Dimensions in mm*			DV/DT V/ $\mu$ Sec	I Peak Amps	I <sub>rms</sub> Max at 100KHz & 55°C Amps	ESR Max at 100KHz m $\Omega$
	D	L	d				
0.047	15.0	23.0	0.8	1400	65.00	5.00	18.00
0.068	15.0	23.0	0.8	1400	95.00	6.00	13.00
0.100	17.0	35.0	1.0	1300	130.00	8.00	11.00
0.150	17.0	35.0	1.0	1300	195.00	8.20	8.20
0.220	19.0	42.0	1.0	1200	264.00	8.20	7.80
0.330	19.0	42.0	1.0	1200	396.00	9.10	7.30
0.470	19.0	55.0	1.0	1000	470.00	11.00	6.80
0.680	19.0	55.0	1.2	1000	680.00	12.00	5.30
1.000	25.0	55.0	1.2	1000	1000.00	12.00	5.00
1.200	30.0	55.0	1.2	1000	1200.00	12.00	4.80
1.500	30.0	55.0	1.2	1000	1500.00	12.00	4.20

Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing"

# S N U B B E R C A P A C I T O R S

## KP-6 Axial Type

### Standard Capacitor Values

#### Working voltage 2000 VDC (630VAC)

Rated Capacitance MFD	Dimensions in mm*			DV/DT V/ $\mu$ Sec	I Peak Amps	I <sub>rms</sub> Max at 100KHz & 55°C Amps	ESR Max at 100KHz m $\Omega$
	D	L	d				
0.010	12.0	23.0	0.8	1700	17.00	3.00	42.00
0.015	15.0	23.0	0.8	1700	26.00	4.00	40.30
0.022	15.0	23.0	0.8	1700	37.00	6.00	36.50
0.033	17.0	35.0	0.8	1700	56.00	7.00	24.20
0.047	17.0	35.0	0.8	1700	80.00	8.00	15.30
0.068	17.0	35.0	1.0	1700	116.00	9.00	14.20
0.100	19.0	42.0	1.0	1000	100.00	9.00	8.60
0.150	19.0	42.0	1.0	1000	150.00	10.00	7.20
0.220	25.0	55.0	1.0	900	198.00	11.00	6.50
0.330	30.0	55.0	1.2	900	297.00	11.00	4.60

#### Working voltage 2500 VDC (700VAC)

Rated Capacitance MFD	Dimensions in mm*			DV/DT V/ $\mu$ Sec	I Peak Amps	I <sub>rms</sub> Max at 100KHz & 55°C Amps	ESR Max at 100KHz m $\Omega$
	D	L	d				
0.033	17.0	35.0	0.8	1500	49.50	4.00	20.00
0.047	17.0	35.0	0.8	1500	70.50	6.00	13.00
0.068	17.0	35.0	1.0	1500	102.00	8.20	11.00
0.100	19.0	42.0	1.0	1200	120.00	8.20	8.90
0.150	19.0	42.0	1.2	1200	180.00	8.20	7.70
0.220	19.0	55.0	1.2	1000	220.00	9.10	6.90
0.330	25.0	55.0	1.2	1000	330.00	10.80	5.80
0.470	25.0	55.0	1.2	1000	470.00	12.00	4.20

Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing"

# S N U B B E R   C A P A C I T O R S

## KP-6 Axial Type

### Standard Capacitor Values


Working voltage 3000 VDC (750VAC)

Rated Capacitance MFD	Dimensions in mm*			DV/DT V/ $\mu$ Sec	I Peak Amps	I <sub>rms</sub> Max at 100kHz & 55°C Amps	ESR Max at 100kHz m $\Omega$
	D	L	d				
0.010	12.0	23.0	0.8	2800	28.00	2.00	62.00
0.015	12.0	23.0	0.8	2800	42.00	3.00	41.00
0.022	15.0	23.0	0.8	2800	62.00	4.00	28.00
0.033	17.0	35.0	1.0	1500	50.00	5.00	19.80
0.047	19.0	55.0	1.0	1000	47.00	6.50	18.00
0.068	19.0	55.0	1.0	1000	68.00	8.00	12.50
0.100	19.0	55.0	1.2	1000	100.00	8.00	8.90
0.150	19.0	55.0	1.2	1000	150.00	11.00	6.70
0.220	25.0	55.0	1.2	1000	220.00	12.00	4.80
0.330	30.0	55.0	1.2	1000	330.00	12.00	4.20

Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing"

### Capacitor Drawing and Terminal Style

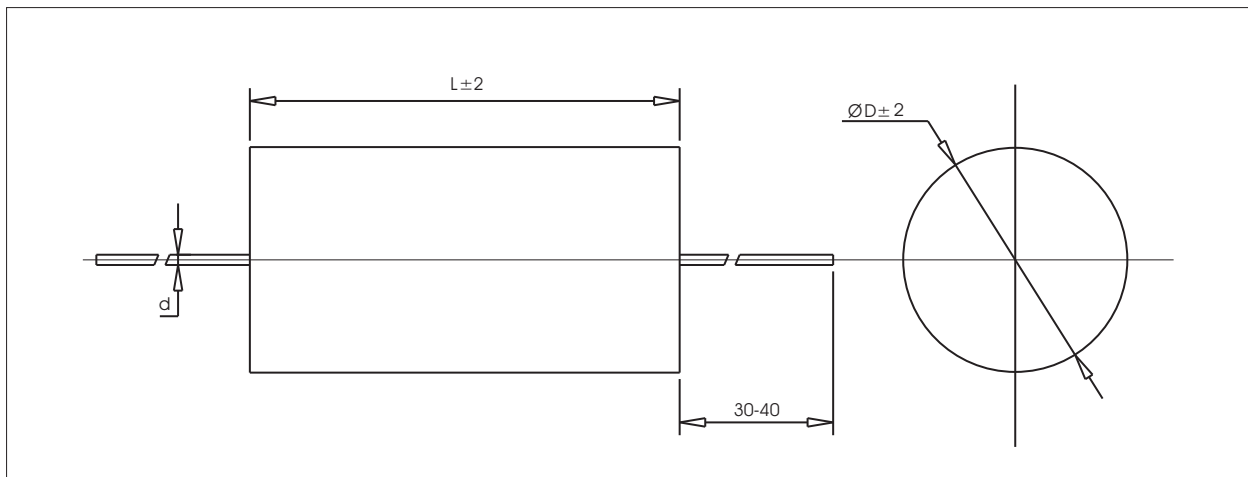

Dimensions in mm

#### Precaution

1. These capacitors are not suitable for 'across the line' applications
2. VAC (rated): Frequency should be less than 1000Hz
3. VDC (rated):  $1.4 \times V_{rms} + VDC$  should be less than rated VDC