


Metallized Polycarbonate Film Capacitor

Related Document: IEC 60384-6

Dimensions in millimeters

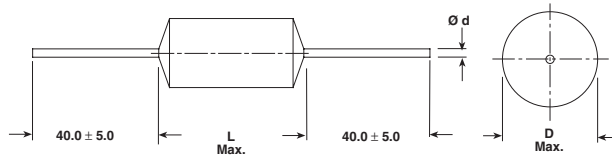

D	Ø D
≤ 7.0	0.7
< 16.0	0.8
≥ 16.5	1.0

MAIN APPLICATIONS

Storage, filter, timing and integrating circuits.

MARKING

Manufacturer's logo/type/C-value/rated voltage/tolerance/date of manufacture

DIELECTRIC

Polycarbonate film

ELECTRODES

Vacuum deposited aluminum

COATING

Plastic-wrapping, epoxy resin sealed

CONSTRUCTION

Extended metallized film (refer to general information)

LEADS

Tinned wire

IEC TEST CLASSIFICATION

55/100/21, according to IEC 60068

OPERATING TEMPERATURE RANGE

-55°C to +100°C

CAPACITANCE RANGE

0.01µF to 10µF

CAPACITANCE TOLERANCES

± 10% (K), ± 5% (J)

FEATURES

 Product is completely lead (Pb)-free.
 Product is RoHS compliant.

RATED VOLTAGES (U_R)

63 VDC, 100 VDC, 250 VDC, 400 VDC

PERMISSIBLE AC VOLTAGES (RMS) UP TO 60HZ

40 VAC, 63 VAC, 160 VAC, 200 VAC

TEST VOLTAGE (ELECTRODE/ELECTRODE)

 1.6 x U_R for 2 s

INSULATION RESISTANCE

Measured at 100 VDC (63 VDC series measured at 50 VDC) after one minute

For C ≤ 0.33µF and U_R > 100 VDC:

30,000 MΩ minimum value (100,000 MΩ typical value)

For C ≤ 0.33µF and U_R ≤ 100 VDC:

15,000 MΩ minimum value (50,000 MΩ typical value)

TIME CONSTANT

Measured at 100 VDC (63 VDC series measured at 50 VDC) after one minute

For C > 0.33µF and U_R > 100 VDC:

10,000 s minimum value (40,000 s typical value)

For C > 0.33µF and U_R ≤ 100 VDC:

5,000 s minimum value (15,000 s typical value)

CAPACITANCE DRIFT

Up to +40°C, ±2% for a period of two years

DERATING FOR DC AND AC. CATEGORY VOLTAGE U_C

 At +85°C: U_C = 1.0 U_R

 At +100°C: U_C = 0.8 U_R
SELF INDUCTANCE

~ 12 nH measured with 6mm long leads

PULL TEST ON LEADS

≥ 20 N in direction of leads according to IEC 60068-2-21

BEND TEST ON LEADS

2 bends through 90° with half of the force used in pull test

RELIABILITY

Operational life > 300,000 h

 Failure rate < 1 FIT (40°C and 0.5 x U_R)

 For further details, please refer to the general information available at www.vishay.com/doc?26033.

RoHS
 COMPLIANT

MAXIMUM PULSE RISE TIME

CAPACITOR LENGTH (mm)	Maximum Pulse Rise Time d _v /d _t [V/µs]			
	63 VDC	100 VDC	250 VDC	400 VDC
14	17	23	38	61
19	9	13	21	33
26.5	6	8	13	20
31.5	5	6	10	16

 If the maximum pulse voltage is less than the rated voltage higher d_v/d_t values can be permitted.



DISSIPATION FACTOR TAN δ


MEASURED AT	$C \leq 0.1\mu\text{F}$	$0.1\mu\text{F} < C \leq 1.0\mu\text{F}$	$C > 1.0\mu\text{F}$
1kHz	3×10^{-3}	3×10^{-3}	3×10^{-3}
10kHz	4×10^{-3}	4×10^{-3}	—
100kHz	10×10^{-3}	—	—
Maximum values			

CAPACITANCE	CAPACITANCE CODE	VOLTAGE CODE 06 63 VDC/ 40 VAC		VOLTAGE CODE 01 100 VDC/ 63 VAC		VOLTAGE CODE 25 250 VDC/ 160 VAC		VOLTAGE CODE 40 400 VDC/ 200 VAC	
		D	L	D	L	D	L	D	L
0.01 μF	- 310	—	—	—	—	—	—	6.0	14.0
0.015 μF	- 315	—	—	—	—	—	—	6.0	14.0
0.022 μF	- 322	—	—	—	—	—	—	6.0	14.0
0.033 μF	- 333	—	—	—	—	6.0	14.0	6.0	14.0
0.047 μF	- 347	—	—	—	—	6.0	14.0	7.0	14.0
0.068 μF	- 368	—	—	—	—	6.0	14.0	8.0	14.0
0.10 μF	- 410	—	—	6.0	14.0	7.0	14.0	7.5	19.0
0.15 μF	- 415	—	—	6.0	14.0	7.5	14.0	8.5	19.0
0.22 μF	- 422	6.0	14.0	6.0	14.0	7.0	19.0	8.5	26.5
0.33 μF	- 433	6.0	14.0	6.0	19.0	8.0	19.0	10.0	26.5
0.47 μF	- 447	7.0	14.0	7.0	19.0	9.5	19.0	11.5	26.5
0.68 μF	- 468	6.5	19.0	8.0	19.0	9.0	26.5	12.0	31.5
1.0 μF	- 510	7.5	19.0	9.0	19.0	10.5	26.5	14.5	31.5
1.5 μF	- 515	8.5	19.0	9.0	26.5	11.5	31.5	—	—
2.2 μF	- 522	9.0	19.0	10.5	26.5	13.5	31.5	—	—
3.3 μF	- 533	9.5	26.5	12.5	26.5	—	—	—	—
4.7 μF	- 547	11.0	26.5	13.0	31.5	—	—	—	—
6.8 μF	- 568	12.0	31.5	15.5	31.5	—	—	—	—
10 μF	- 610	14.0	31.5	17.5	31.5	—	—	—	—


Further C-values upon request
pcm = L + 3.5

RECOMMENDED PACKAGING


LETTER CODE	TYPE OF PACKAGING	REEL DIAMETER (mm)	ORDERING CODE EXAMPLE	
G	AMMO	—	MKC 1860-422/404-G	X
R	REEL	350	MKC 1860-422/404-R	X
—	BULK	—	MKC 1860-422/404	X

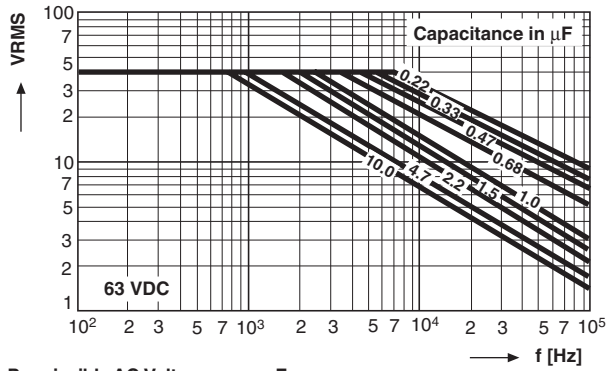


Permissible AC Voltage versus Frequency

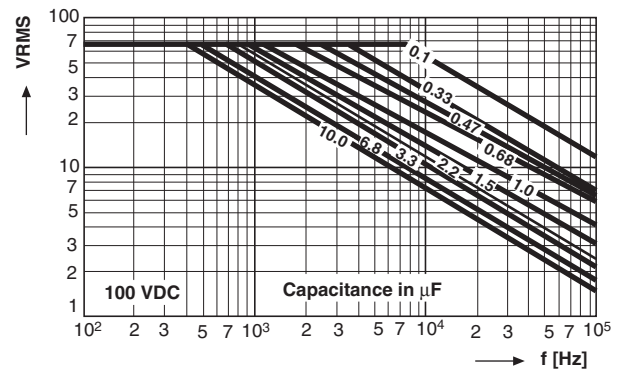

Permissible AC Voltage versus Frequency

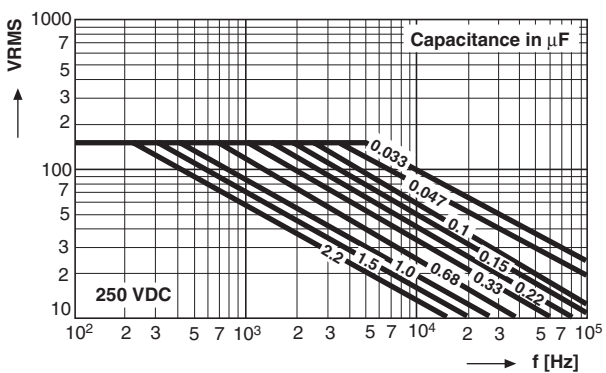

Permissible AC Voltage versus Frequency

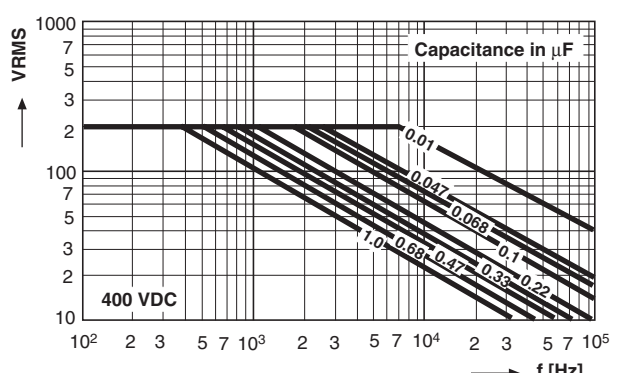

Permissible AC Voltage versus Frequency



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)

[MKC1860422065](#) [MKC1860522065](#) [MKC1860447015](#) [MKC1860410254](#) [MKC1860422014](#) [MKC1860510255](#)
[MKC1860610065](#) [MKC1860510064](#) [MKC1860433255](#) [MKC1860468255](#) [MKC1860410015](#)