

## 10A, 20V - 200V Schottky Barrier Rectifier

### FEATURES

- AEC-Q101 qualified available
- Low power loss, high efficiency
- Guard ring for overvoltage protection
- High surge current capability
- UL Recognized File # E-326243
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21



### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- DC to DC converters

### MECHANICAL DATA

- Case: ITO-220AB
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Mounting torque: 0.56 N·m maximum
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 1.70g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	10	A
$V_{RRM}$	20 - 200	V
$I_{FSM}$	120	A
$T_{JMAX}$	125, 150	°C
Package	ITO-220AB	
Configuration	Dual dies	

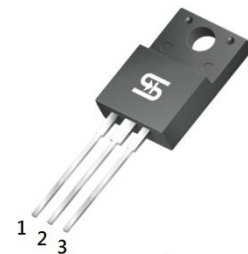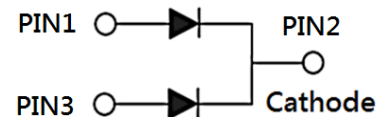
**ITO-220AB**


ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)											
PARAMETER	SYMBOL	SRF 1020	SRF 1030	SRF 1040	SRF 1050	SRF 1060	SRF 1090	SRF 10100	SRF 10150	SRF 10200	UNIT
Marking code on the device		SRF 1020	SRF 1030	SRF 1040	SRF 1050	SRF 1060	SRF 1090	SRF 10100	SRF 10150	SRF 10200	
Repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	90	100	150	200	V
Reverse voltage, total rms value	$V_{R(RMS)}$	14	21	28	35	42	63	70	105	140	V
Forward current	$I_F$	10									A
Surge peak forward current, 8.3ms single half sine wave superimposed on rated load	$I_{FSM}$	120									A
Junction temperature	$T_J$	-55 to +125				-55 to +150					°C
Storage temperature	$T_{STG}$	-55 to +150									°C

THERMAL PERFORMANCE						
PARAMETER		SYMBOL	TYP	UNIT		
Junction-to-case thermal resistance	SRF1020 SRF1030 SRF1040 SRF1050 SRF1060	$R_{\theta JC}$	3.5	°C/W		
	SRF1090 SRF10100 SRF10150 SRF10200		4.0	°C/W		

ELECTRICAL SPECIFICATIONS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)								
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT		
Forward voltage per diode <sup>(1)</sup>	SRF1020 SRF1030 SRF1040	$I_F = 5\text{A}, T_J = 25^\circ\text{C}$	$V_F$	-	0.55	V		
	SRF1050 SRF1060			-	0.70	V		
	SRF1090 SRF10100			-	0.90	V		
	SRF10150 SRF10200			-	1.00	V		
	SRF1020 SRF1030 SRF1040 SRF1050 SRF1060			$T_J = 25^\circ\text{C}$	$I_R$	-	500	$\mu\text{A}$
	SRF1090 SRF10100 SRF10150 SRF10200					-	100	$\mu\text{A}$
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	SRF1020 SRF1030 SRF1040	$T_J = 100^\circ\text{C}$	$I_R$	-	15	mA		
	SRF1050 SRF1060			-	10	mA		
	SRF1090 SRF10100 SRF10150 SRF10200			-	-	mA		

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
<b>PARAMETER</b>		<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	SRF1020 SRF1030 SRF1040 SRF1050 SRF1060	$T_J = 125^\circ\text{C}$	$I_R$	-	-	mA
	SRF1090 SRF10100 SRF10150 SRF10200			-	5	mA

**Notes:**

1. Pulse test with  $PW = 0.3\text{ms}$
2. Pulse test with  $PW = 30\text{ms}$

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b> <sup>(1)(2)</sup>	<b>PACKAGE</b>	<b>PACKING</b>
SRF10x	ITO-220AB	50 / Tube
SRF10xH	ITO-220AB	50 / Tube


**Notes:**

1. "x" defines voltage from 20V(SRF1020) to 200V(SRF10200)
2. "H" means AEC-Q101 qualified


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

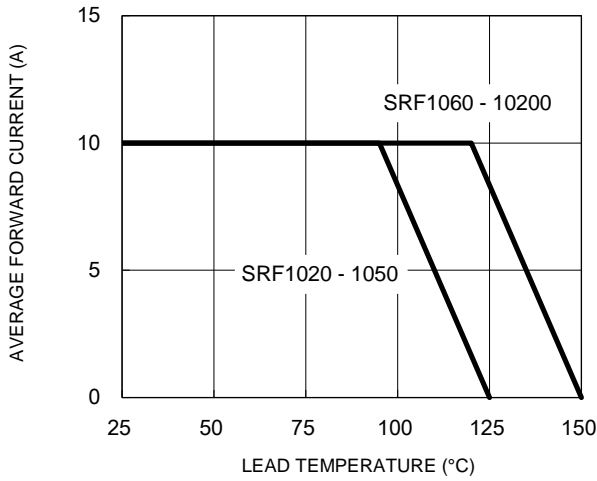


**Fig.2 Typical Junction Capacitance**

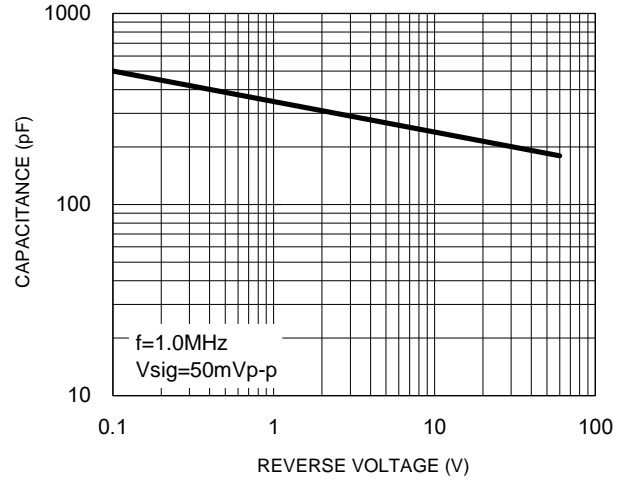


**Fig.3 Typical Reverse Characteristics**

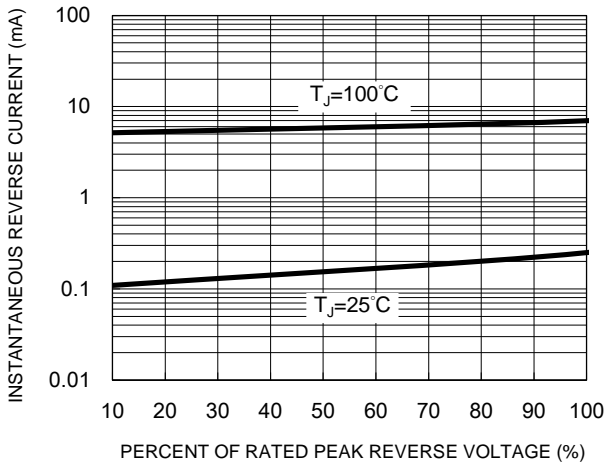

**Fig.4 Typical Forward Characteristics**

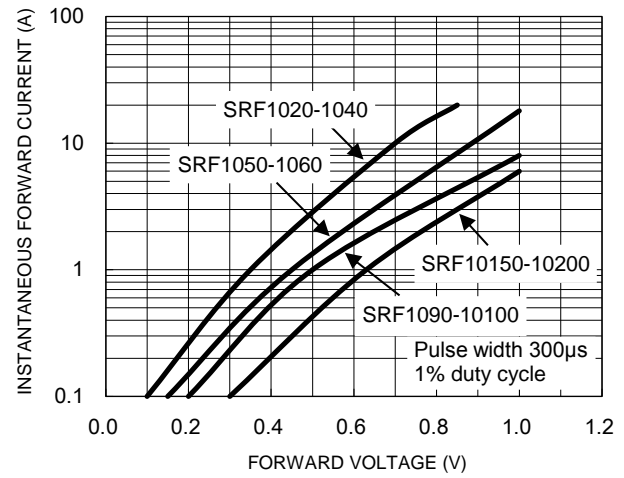


**Fig.5 Maximum Non-Repetitive Forward Surge Current**

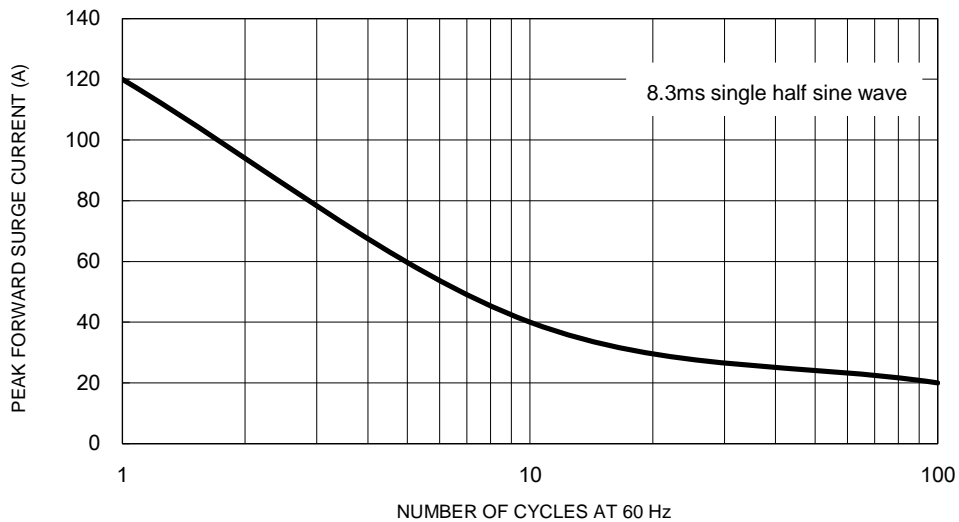


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.6 Typical Transient Thermal Impedance**

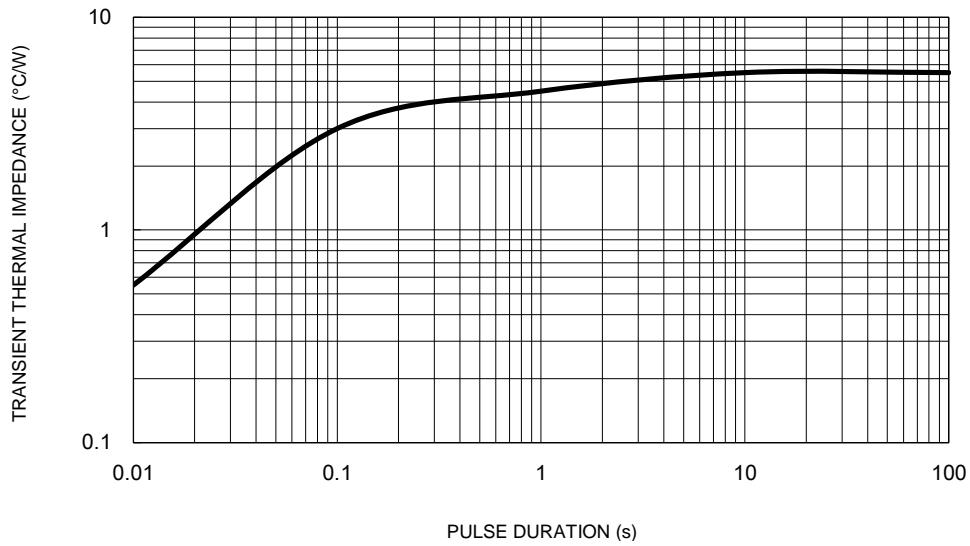

**PACKAGE OUTLINE DIMENSIONS**

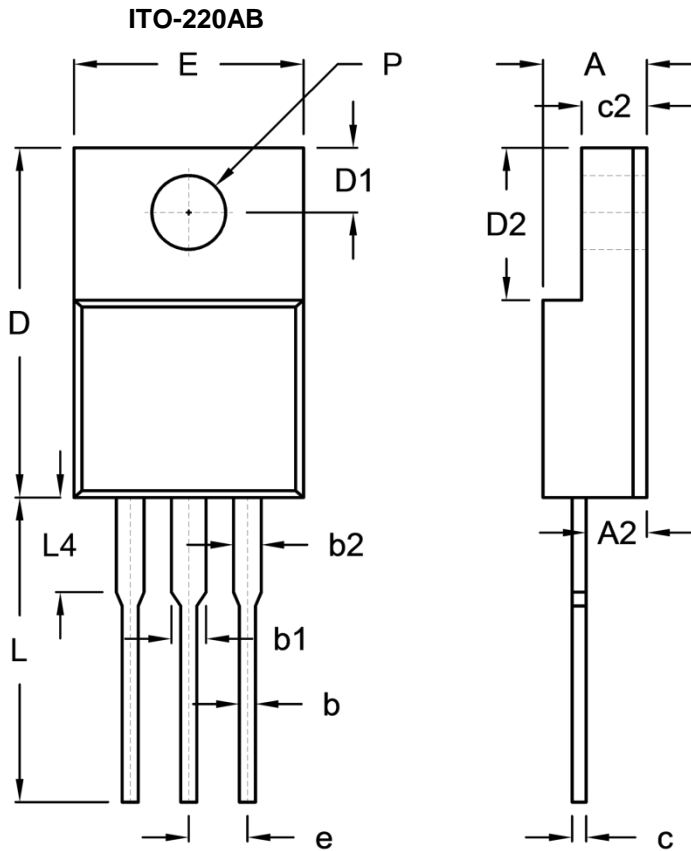

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A2	2.30	2.96	0.091	0.117
b	0.50	0.90	0.020	0.035
b1	-	1.80	-	0.071
b2	0.95	1.45	0.037	0.057
c	0.46	0.76	0.018	0.030
c2	2.50	3.16	0.098	0.124
D	14.80	15.50	0.583	0.610
D1	2.40	3.20	0.094	0.126
D2	6.30	6.90	0.248	0.272
E	9.60	10.30	0.378	0.406
e	2.41	2.67	0.095	0.105
L	12.60	13.80	0.496	0.543
L4	-	4.10	-	0.161
P	3.00	3.40	0.118	0.134

**MARKING DIAGRAM**



- P/N = Marking Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code

## **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.