

EMI/EMC FILTER

ME/MD SERIES

ME1-200T, ME2-50T, ME3-200T : 



FEATURES

- High current ratings(max 200A)
- Good shield effect by using metal case
- Epoxy molded for reliability(model MD series)
- Two hole lug type terminal connection(model ME series)


APPLICATIONS

- Cellular base stations.
- Telecommunication switching networks and racks.
- High current switching power supplies.
- Industrial controls and power supplies.

SPECIFICATIONS

Model	Rated Voltage (V)	Rated Current (A)	Operating Temperature
MD1-50TAX	100VDC	50	-40/-25℃ to +85/100/105℃ Including temperature rise
MD1-100TAX	100VDC	100	
MD1-200TAX	100VDC	200	
MD2-50TAX	100VDC	50	
MD2-100TAX	100VDC	100	
MD2-200TAX	100VDC	200	
MD3-200TAX	100VDC	200	
ME1-200T	100VDC	200	
ME2-30TA	250VAC	30	
ME2-50T	250VAC	50	
ME2-200TA	250VAC	200	
ME3-200T	100VDC	200	

Derating Curve

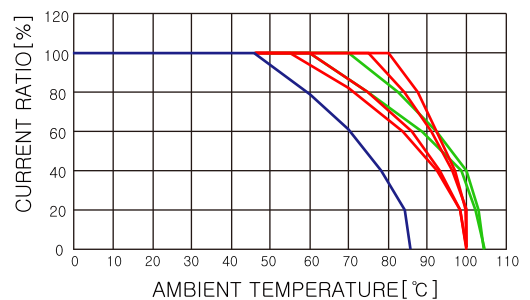


■ Model Number Construction


MD 1	50	T	A
Series Description ME series MD series	Current Rating 30 : 30 amp 50 : 50 amp 100 : 100 amp 200 : 200 amp	Output Terminal Style	Suffix No of modification

Shapes and Dimensions


MD1-50 TAX

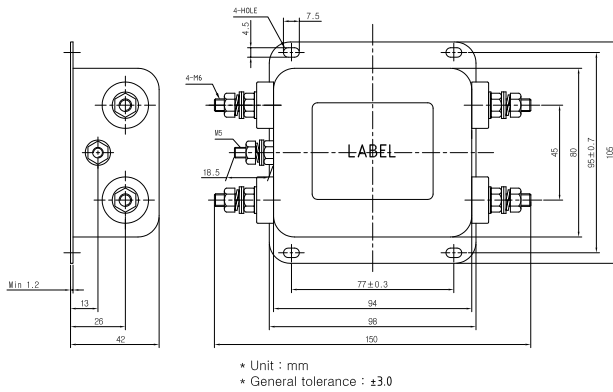

MD1-100 TAX

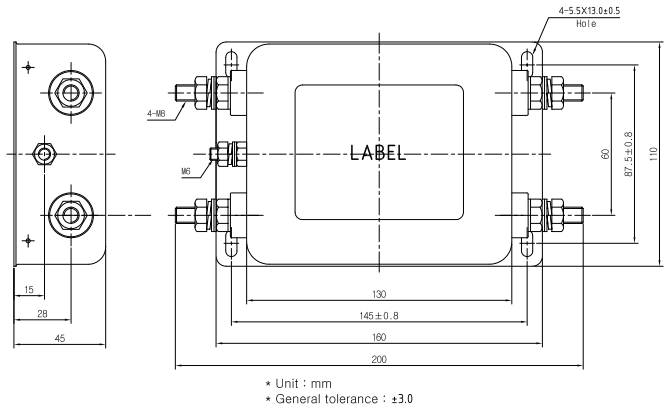

MD2-200 TAX

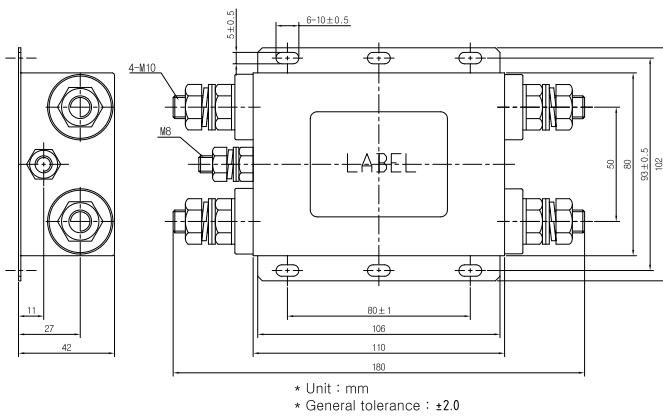

ME3-200 T

